

# Uncompromising design, innovation and technology.

Imagine a world where functional doesn't mean boring, where outstanding becomes the standard and where you are no longer pressed for time. Welcome to the new world of Siemens.

Introducing coordinated and intelligently designed appliances by Siemens. Discover the entire built-in range – for even more flexibility and time-saving solutions that help with our increasingly busy lifestyles.

An oven that saves time, speeding up your cooking by up to 50% with varioSpeed. Dishwashers that feature the world's only Zeolith® drying system; a technological innovation that sets new standards for performance and energy efficiency. Fridge freezers with hyperFresh food preservation technology and outstanding freezers that never have to be defrosted. Not to mention high performance built-in washing machines. All working together to create a spectacular built-in kitchen for your home.

Stunning design that coordinates with the rest of your living space as well as high quality materials come as standard with all Siemens appliances. Offering you the perfect balance between modern design and innovative technology, Siemens appliances sit seamlessly together in your home.

Introducing the Siemens iQ range

iQ700

iQ700 promises the benefit of outstanding products with eye-catching design and cutting-edge technology that adds uniqueness to your life.


iQ500

iQ500 brings the latest innovations and exclusive designs to your kitchen, allowing you to experience first-class appliances in your home.

iQ300

Attractive appliances are merged with an extended selection of intelligent technology; the perfect combination of value and style. iQ100


iQ100 offers a gateway to the world of Siemens Home Appliances through a selection of standard but attractive products.

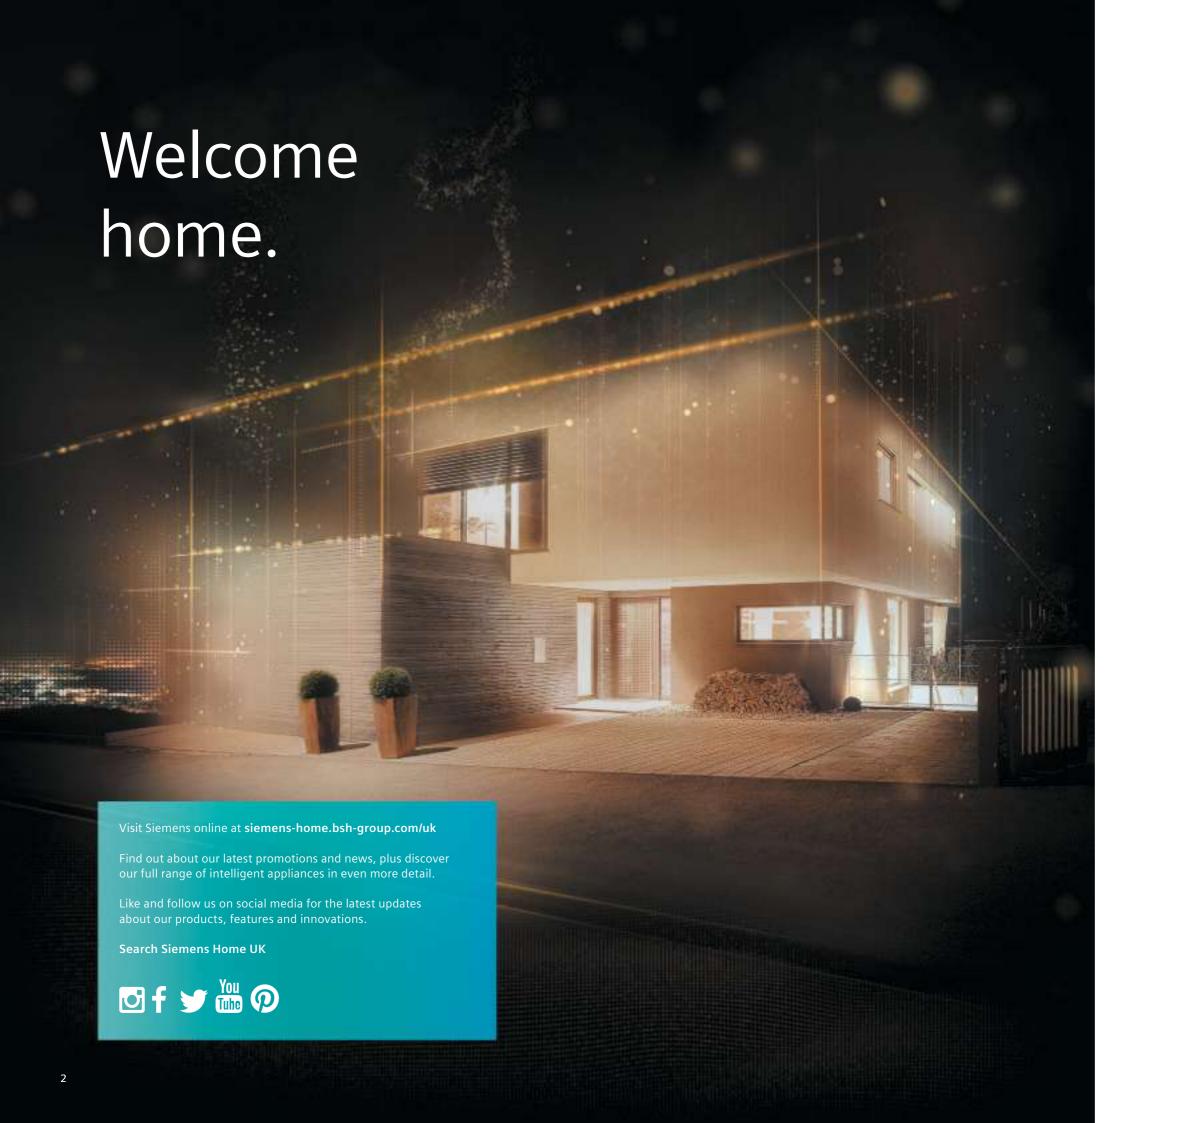

Ovens and Compact Appliances	8-37
Single ovens  Built-in and built-under double ovens  Compact pyrolytic oven  Compact steam combination ovens  Compact steamer  Compact pyrolytic oven with integral microwave	24 31 32 32
Compact oven with integral microwave	34 34 35 36
Hobs 3	8-59
inductionAir hob	45-48 49-51 52 53-57
Hoods 6	0-81
modulAir domino hood	67 68 69-70 71 72-73 74 75 76-77 78 80-81
Cooling 82	-105
aCool built-in cooling appliances	91 92-94 97-105
Dishwashers 106	-115
Fully integrated	114
Home laundry 116	-121
Washing machines	
Services 122	-123
Contact us	22-123 22-123









- Recipe World offers you a wide range of delicious recipes - choose your favourite and send the ideal settings directly to the oven.
- Operate the oven intuitively from wherever you are, for instance to preheat it while you are on your way home
- The coffeeWorld in your Home Connect App provides an additional variety of delicious coffee specialties from around the world.
- The coffeePlaylist enables you to transfer the beverage wishes of all your guests remotely to the appliance at once – the coffee centre will then prepare one after another.

Models shown: HN678GFS6B single oven CT636LES6 coffee centre, BI630CNS1B warming drawer



# Hobs and Hoods

- Remote monitoring gives you an overview of your
- appliance's current status from wherever you are. • Intuitively change and select settings on your appliances via the Home Connect App.
- Push notifications inform you about your appliances such as when the filters need replacing.
- Access 256 colours to set the ambient lighting of selected hoods with emotionLight Pro.



# Dishwashers

- The Easy start dishwashing function on the Home Connect App allows you to select the kind of dishes you'd like to clean and choose the right dishwashing programme to suit the load.
- · Remote controlling lets you select options, and start programmes intuitively, wherever you are.
- With the Tab Counter you can get Push Notifications straight to your mobile, via the Home Connect App, whenever the supply of dishwasher tabs needs to be refilled.

Models shown: I C97FVW60B hood EX975KXW1E hob

Model shown: SN678D06TG built-in dishwasher



# Fridge Freezers

- Cameras in the fridge let you check the contents of your fridge from wherever you are, whenever you want\*.
- · Remote controlling allows you to intuitively select and activate the ideal setting for your refrigerator.

Model shown: KG36NHI32 fridge freezer



# Washing Machines and Washer Dryers

- The Easy start function on your washing machine, using the Home Connect App, allows you to answer a few simple questions and then automatically suggests the correct programme for your load.
- Remote monitoring provides you with an easy overview of your appliance's current status from wherever you are.
- Push Notifications inform you when the cycle is finished and, for our i-Dos model, whenever the fill status of detergent or fabric softener is getting low.

Model shown: WM4UH640GB avantgarde washing machine WT7XH940GB avantgarde tumble dryer.
Both available within the Siemens 2018 Freestanding Range.



Is an appliance Wi-Fi ready? To see which of our appliances come Wi-Fi-enabled so that you can use Home Connect, look out for the Wi-Fi ready icon next to the product description.



Discover even more about Home Connect

To find out about about the exciting possibilities Siemens Home Appliances and Home Connect offers visit: siemens-home.bsh-group.com/uk/home-connect

Home Connect is a service offered by Home Connect GmbH. To use Home Connect, you have to create a user account and

\*Applies to freestanding fridge freezers only



Ovens and Compacts. Perfect built-in design.

# Ovens

Siemens built-in ovens are designed to impress, with their stylish design, ensuring a sleek finish when coordinated with other Siemens appliances. Their ability to be installed complete visual perfection. Siemens independently allows full flexibility to 45cm and 36cm high compact fit under work surfaces, in tall units or appliances allow for a full array of in a bank with other appliances. These cooking experiences. Depending on multiple combinations mean that you the range and model, compact ovens have full freedom with your kitchen design, not to mention state-of-theart technology and features which save you time when cooking.

# Compacts

With the variety of appliances in our compact built-in range, Siemens provides a combination of options to suit your preferences, while delivering are available with steam or integrated microwave, offering space-saving design without compromising on style or utility. Thanks to Siemens coordinated design, it's easy to combine these appliances with warming drawers, a coffee centre, and single ovens\*.

Models shown: CS658GRS6B compact steam combination oven, CM678G4S6B compact pyrolytic oven with integral microwave and BI630CNS1B warming and accessory drawer

\*Please check individual models for full specification



The iQ700 range has three differing fascia designs each featuring TFT displays with products designed to complement each other and coordinate effortlessly in your kitchen.

Top of the range is the TFT touchDisplay Plus, featuring a large colour touch control panel. The premium TFT touchDisplay features a smaller interface; with the range completed by the easy to use TFT Display. Thanks to the simple menu structure optimised for convenient and easy-to-use touch navigation, it's even easier to select the perfect settings. Designed to serve one purpose: giving you full control.

# Display ranges





TFT touchDisplay Plus
The TFT touchDisplay Plus
offers more than just control
of your oven. It gives tips
and information on each
programme, full colour graphics
and images, it can even suggest
the correct way to cook your
dishes with cookControl Plus.
Clear to read from any angle,
it's advanced yet easy-to-use
technology for effortless
cooking.





TFT touchDisplay
The slightly smaller TFT
touchDisplay offers all
the functionality of a
touchscreen display with
crisp text
and images.





TFT Display
The TFT Display can be
operated with touchControl
buttons either side of the
screen, yet still has clear
programme information.

# Perfect built-in design.

All appliances in the iQ700 Built-in Appliances Range can be combined perfectly with each other.

The iQ700 ovens, compact ovens, coffee centre and warming drawers all line up thanks to the coordinated front panels. It doesn't matter whether you arrange the appliances horizontally or vertically: the result always pleases the eye. For optimum design coordination ensure products are combined with complementing fascia designs.

## CM678G4S6B compact45 oven with microwave





BI630CNS1B warming drawer

**HN678GES6B** single oven with integrated microwave and pulseSteam

# Key features





iQ700 Ovens with varioSpeed
Twice as fast in combination: by adding the integrated microwave function to a conventional cooking option, you can speed up the preparation of your dishes without compromising on the quality.
Save up to 50% of your time to give you freedom when you require it.





iQ700 Ovens with Home Connect Control your oven with the touch of an app: the Home Connect app gives you the ability to control your oven away from home, so you can preheat the oven and prepare dinner before you even leave work.



# Operation meets fascination: lightControl.



The new lightControl dial highlights the chosen heating symbol with a striking blue light – making operating the oven into an intuitive and exciting experience. The design is consistent throughout the iQ500 range, meaning whether you are selecting a cooking function on a single oven, or introducing steam to the 3 in 1 microwave combination compact appliance, lightControl dials will illuminate whichever function you need.



All the appliances in iQ500 are designed with white LCD display and blue illuminated lightControl dials, meaning no matter the combination you want the appliances will complement one another. The new iQ500 oven offers a shortcut to a new level of cooking, allowing you to achieve your goals in your individual time. With its stylish glass and chrome, the iQ500 oven is a highlight in your kitchen. Thanks to premium materials and many refined details, it makes a lasting visual impact.

# Perfect built-in design.

The iQ500 range offers you flexibility to create a kitchen with appliances which fulfil your needs.

Featuring more traditional, yet stylish, illuminated and easy to use control dials, the coordinated lightControl design allows the single ovens, built in/under double ovens, compact microwave combination ovens, built in microwave ovens, and warming drawers to be installed together, both vertically and horizontally\*.

CP565AGS0B compact45 microwave combination oven with steam



BI510CNR0B warming drawer

HB578A0S0B single oven

# Key features

More possibilities to impress with iQ500.





## coolStart

Cooking certain frozen foods in the oven is now even faster – thanks to the innovative coolStart function. Without the need to wait for the oven to reach the set temperature, you can successfully cook frozen foods without preheating, while still using the recommended cooking time.





## ast preheat

No more tedious waiting for the oven to get to the right temperature! When you need it, just switch on fast preheating. By activating many heating elements simultaneously, Siemens ovens with fast preheating get to the desired temperature very quickly.

<sup>\*</sup>Horizontal combinations for single ovens and 45cm compact appliances only.

# Ovens feature guide.

# Reference key:



Model does have this feature



Model does not have this feature

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model.

# Key functionality



Energy efficient ovens\* Most Siemens single ovens achieve a European Class A+ rating for energy efficiency. For better efficiency, certain models feature the hotairGentle and conventional heat Gentle functions.



Wifi

Wi-Fi ready With Wi-Fi enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.

ecoClean® A direct coating that lines the back,

cleaning the oven easy. The coated area cleans


a cleaning programme. Available either as a full coating or exclusively on the back panel.

itself while the oven is on or can be activated with

roof and side of the oven, ecoClean® makes



activeClean® Heating the cavity up to 480°C, activeClean® burns away all dirt and grime to save time. On iQ700 ovens the self-cleaning feature can also be used with pyrolytic proof telescopic rails and bars.





pulseSteam Prepare perfectly juicy and crispy dishes with pulseSteam and other cooking functions like hot air to create a wider variety of meals that make the appliance more flexible.



cookControl Plus Once the programme is selected and weight entered, the oven automatically selects the best setting, controls the cooking time and switches off when done.



varioSpeed By choosing the integrated microwave function with a conventional cooking option, you can speed up the preparation of dishes by up to 50%

 $<sup>{\</sup>ensuremath{^{\star}}}\xspace For individual product energy efficiency ratings please check the icons next to the product specification$ 



# Other oven features



Energy efficiency in main oven Siemens double ovens achieve a European Class A rating for energy efficiency.



Energy efficiency in top oven Siemens double ovens achieve a European Class B rating for energy efficiency.



3D hotAir Can cook all types of food on up to 3 levels simultaneously to stop flavours and smells interminaling



Bottom heating Heating the oven from the base, the Bottom heat setting is ideal for casseroles, curries, slow cooking and even bains-marie.



**hotairGentle** For gently cooking selected dishes on one level without preheating.



Hot air grilling Perfect for poultry or smaller cuts of meat. The grill and fan operate alternately, which results in evenly cooked food.



roastingSensor is able to precisely and reliably measure the internal temperature of your dishes. By getting an accurate reading of the core temperature of roasts and other foods, it can determine when they are perfectly done.



cookControl provides automatic programmes for the perfect preparation of meat, fish, vegetables and bread. Simply select the desired dish and enter the food's weight – everything else is done automatically. Either 10, 15 or 30 programmes available, depending on the model.

# Other product features

# 4D hotAir cooking

Ideal for all types of food, 4D hotAir allows you to cook sweet and savoury simultaneously on up to 4 shelves, without flavours and smells intermingling.

## bakingSensor

Ideal for baking cake or bread. A sensor constantly measures the moisture levels in the oven and is able to tell you when the dish is fully cooked.

## coolStart

No more preheating when cooking frozen convenience food. Using an intelligent heating phase, it's now possible to cook frozen food without waiting for the oven to preheat.

# Dehydrate/drying

Ideal for homemade dried fruits or herbs. The drying function is based on hotAir using a temperature between  $40 - 80^{\circ}$ C.

## Full width surface gril

A surface grill that gives you precision grilling temperatures for a full width grill.

## Intensive conventional heat

Using the top heating elements, with the powerful bottom element, this intensive setting is ideal for cheesecakes, crispy cake bases and tins that have poor heat conduction.

# Intensive hot air/Pizza setting

Providing extra heat from the bottom of the oven and sides, Intensive hot air not only cooks food thoroughly, it's perfect for crisping pizza bases.

## Keep warm setting

This setting keeps food warm until it's ready to serve, meaning food doesn't dry out or change in texture or taste.

# Low temperature cooking

Cook meats and casseroles at low temperatures while keeping food juicy and tender without overcooking.

Microwave Available on selected iQ700 ovens – primarily designed to deliver varioSpeed functionality, but also available as a solo function. Heating times may need adjusting.

# Plate warming function

Keeping plates and serving dishes warm, this setting ensures food stays warm once on the table.

# RoastingSensor Plus

The roastingSensor Plus has three temperature sensors to precisely and reliably measure the core temperature of your dishes while cooking.

## Sabbath setting

Designed to keep precooked food warm for long periods of time, the Sabbath setting keeps the oven temperature between  $85^{\circ}\text{C} - 140^{\circ}\text{C}$ , for 24 to 73 hours.

## oftMove

For a calmer kitchen, when you open or close your oven door the intelligent dampers ensure that the oven door is left to open and close gently and quietly. Available on all iQ700 built-in ovens.

# Top/bottom heating

For gently cooking selected dishes on one level.



# Steam cooking. The healthy way to cook.



## fullSteam

With the Siemens HS658GES6B multifunction fullSteam oven you can prepare delicious and healthy vitamin-rich dishes. Choose the fullSteam option from the 15 different functions and use only hot steam to cook the food, which is perfect for rice, fish and vegetables. You therefore retain the food's full flavour, colour, vitamins and minerals while cooking without fat or oil. The iQ700 oven is easy to use, even for someone who has never cooked with steam before. fullSteam functionality is also available on Siemens compact oven models CS658GRS6B, CS656GBS6B and CD634GBS1B.



## pulseSteam

Siemens ovens and compact appliances with pulseSteam are real all-rounders for more flexibility with your cooking. It's easy to cook with steam while baking and roasting with hot air — with their multifunction options you have the perfect cooking method for any food, preserving everything that is important: flavour, smell, texture, vitamins and nutrients. And Siemens combi-steam ovens don't just work with hot air but also with top and bottom heating and grilling, so bread, cakes and roasts come out just right too: crisp on the outside and moist on the inside.

# How does it work?

Siemens steam and steam combination ovens are quick and easy to install as they don't need plumbing-in.

Our fullSteam ovens have the temperature range indicated; whereas our pulseSteam models have three intensity levels which can be adjusted, depending on what is being cooked.

The removable 1 litre water tank (1.3 litre for compact steamer) is accessed behind the semi-automatic control panel making it more convenient and easier to refill, even during cooking. Water is heated by a fast and efficient steam generator before being introduced into the oven. Thermostatic controls allow a pure steam temperature of 30 – 100°C.



Model shown: HR678GES6B single oven

# More to explore. Achieve the best results.



Easier than ever before: roastingSensor Plus
Thanks to three measuring points, the innovative
roasting thermometer is able to precisely and reliably
measure the core temperature of your dishes. This
allows you to use it with a wider range of foods. Ideal
for meat, poultry and fish, it can even be combined
with the integrated microwave and the pulseSteam
function. Without the need to keep checking, the
roastingSensor Plus gives you the freedom to get
on with the rest of your cooking. Within the iQ500
range there is the roastingSensor; a temperature
probe with one measuring point, so for leaner cuts
of meat you can roast without worry.



An oven that can detect when the baking process is complete: the **bakingSensor** 

All that's left for you to do when baking: prepare the pastry or mix and select the required dish. Innovative sensor technology fitted inside selected iQ700 ovens can automatically control the baking process for consistently delicious baking. The bakingSensor constantly measures the moisture levels in the oven interior and is therefore able to tell you when the dish is fully cooked and ready.



Model shown: HN678GES6B single oven

# Single ovens with activeClean®

Stunningly, uniquely Siemens, our iQ700 and iQ500 single ovens convey an elegant impression of absolute quality and intelligent innovation.

With iQ700 you can experience truly flexible cooking, with features such as Home Connect functionality and varioSpeed, which gives you the choice to speed up your dishes by up to 50% of the cooking time. The sleek design fits perfectly into any modern kitchen and houses an impressive range of features like activeClean® and coolStart to help you save time.





# iQ 700 HN678GES6B Black, stainless steel

Single multi-function oven with TFT touchDisplay Plus

- Capacity 67 litres, 5 shelf positions
- varioSpeed 50% time saving
- pulseSteam easily add steam
- softMove drop down oven door effortless opening and closing
- roastingSensor Plus and bakingSensor: detect the exact moment when your food is done
- Multilevel LED-Illumination efficient and long-lasting
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- Additional heating methods with steam: reheating, dough proving
- Additional heating methods with microwave: microwave (5 power levels up to 800W), combi microwave variable
- Microwave inverter technology









# 10700 HM678G4S6B Black, stainless steel

Single multi-function oven with TFT touchDisplay Plus

- Capacity 67 litres; 5 shelf positions
- varioSpeed 50% time-saving
- softMove drop down oven door effortless opening and closing
- roastingSensor Plus and bakingSensor: detect the exact moment when your food is done
- Multilevel LED-Illumination efficient and long-lasting
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- Additional heating methods with microwave: microwave (5 power levels up to 800W), combi microwave variable
- Microwave inverter technology

# Single multi-function oven with TFT touchDisplay

- Capacity 67 litres: 5 shelf positions
- varioSpeed 50% time-saving
- $\bullet$  softMove drop down oven door effortless opening and closing

10700 HM676G0S6B Black, stainless steel

- LED illumination efficient and long-lasting
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Additional heating methods with microwave: microwave (5 power levels up to 800W), combi microwave variable
- Microwave inverter technology





# 10700 HR678GES6B Black, stainless steel

# Single multi-function oven with TFT touchDisplay Plus

- Single maid ranedon oven men in touch bisplay ma
- pulseSteam easily add steam

• Capacity - 71 litres; 5 shelf positions

- softMove drop down oven door effortless opening and closing
- Multilevel LED-Illumination efficient and long-lasting
- roastingSensor Plus and bakingSensor: detect the exact moment when your food is done
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- · Additional heating methods with steam: reheating, dough proving
- Energy consumption 4D hotAir 0.69kWh

# 10700 HR676GBS6B Black, stainless steel

- Single multi-function oven with TFT touchDisplay
- Capacity 71 litres; 5 shelf positions
   pulseSteam easily add steam
- softMove drop down oven door effortless opening and closing
- Multilevel LED-Illumination efficient and long-lasting
- roastingSensor Plus and bakingSensor: detect the exact moment when your food is done
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Additional heating methods with steam: reheating, dough proving
- Energy consumption 4D hotAir 0.69kWh









# HB678GBS6B Black, stainless steel

Single multi-function oven with TFT touchDisplay Plus

- Capacity 71 litres; 5 shelf positions
- softMove drop down oven door effortless opening and closing
- $\bullet$  roasting Sensor Plus and baking Sensor: detect the exact moment when your food is done
- $\bullet \ \, \text{Multilevel LED-Illumination} \text{efficient and long-lasting} \\$
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- Energy consumption 4D hotAir 0.69kWh

# 10700 HB676GBS6B Black, stainless steel

Single multi-function oven with TFT touchDisplay

- Capacity 71 litres; 5 shelf positions
- softMove drop down oven door effortless opening and closing
- LED illumination efficient and long-lasting
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Energy consumption 4D hotAir 0.69kWh

# Single ovens with activeClean®







# 10,700 HB672GBS1B Black, stainless steel

Single multi-function oven with TFT Display

- Capacity 71 litres; 5 shelf positions
- softMove drop down oven door effortless opening and closing
- Halogen light
- 8 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, pizza setting,
- Energy consumption 4D hotAir 0.69kWh

# Intelligence as standard.

An oven door that opens and closes gently and quietly thanks to the intelligent mechanism: softMove.

For a calmer kitchen, when you open or close your oven door the intelligent dampers ensure that the oven door is left to open and close gently and quietly. Available on all iQ700 built-in ovens.









# The ideal kitchen helper: cookControl and cookControl Plus.

Pre-installed settings to guarantee the best results for numerous dishes.



# cookControl

Providing automatic programmes for mainly meat, poultry and fish. Available in either 10 programmes or 30 programmes, simply suggest the desired dish and enter the food's weight - everything else is done automatically.



# cookControl Plus

Simply select the required dish and enter the weight – the cookControl Plus function immediately provides full colour images with individual recommended settings for perfectly cooking the dish you want to your preferences.

This automatic cooking offers up to 70 programmes to ensure meat and fish are cooked to perfection. If your using a roastingSensor or bakingSensor, cookControl Plus will automatically suggest the mode, time and temperature for your cooking. So why make it complicated when it can be simple?





# The easiest way to clean an oven is to let the oven clean itself. With activeClean® and ecoClean® it will be spotless.

Thanks to activeClean® and ecoClean® by Siemens, you don't have to worry about cleaning the oven. Just press a button, and your oven cleans itself.



## Ovens with activeClean®.

Enjoy preparing food without worrying about the consequences. No matter how creative it gets in the oven interior, you no longer need any chemical treatments to get it clean again – only the push of a button. Hassle-free, the oven cleans itself thoroughly with activeClean®. It does so by heating up to a very high temperature – turning all residues into ash, which can easily be wiped away. This process is called pyrolysis and is the most convenient and efficient way to clean the whole interior of your oven. activeClean® makes it possible to forget about the chore of cleaning your oven and gives you back your time to spend on the things you love.

For iQ700, even the telescopic rails, bars and tray are specially designed to be used with activeClean® so you don't need to remove them at all. Only the wire shelf needs to be removed.



## Ovens with ecoClean®

A direct coating that lines the back, roof and side of the oven, ecoClean® makes cleaning the oven easy. The coated area cleans itself while the oven is on or can be activated with a cleaning programme.

# Cleaning and de-scaling

Finished with a durable enameled interior, most Siemens compact45 combination ovens feature dedicated de-scaling and cleaning programmes.

# Drying programme

Saving the effort of wiping down the steam oven after use, the drying programme removes left over humidity inside the cavity of the oven by heating up for approximately 10 minutes. Afterwards, the door should be opened so residual steam can escape.



Single multi-function oven with lightControl display

- Capacity 71 litres; 5 shelf positions Electronic control
- Halogen light
- 9 main functions: 3D hotAir, hotAirGentle, top/bottom heating, hot air grilling, full width grill, coolStart, pizza setting, bottom heat, low temperature cooking
- cookControl 30
- Energy consumption 3D hotAir 0.81kWh

Ovens | Single ovens with ecoClean® Single ovens with ecoClean® | Ovens

# Single ovens with ecoClean®

Siemens iQ700 and iQ500 single ovens feature ecoClean®; a direct coating on the roof, back and sides of the interior which offers a cleaning setting meaning you need only manually clean the base and inner door; cleaning your oven has never been so easy.







Enjoy healthier meals created by the power of fullSteam; a solution that is perfect for steaming rice, fish and vegetables.

# iQ700 HS658GES6B Black, stainless steel

Single multi-function oven with TFT touchDisplay Plus

• Capacity - 71 litres; 5 shelf positions

- fullSteam making it simple to cook healthy and delicious dishes
- softMove drop down oven door effortless opening and closing
- roastingSensor Plus and bakingSensor: detect the exact moment when your
- Multilevel LED-Illumination efficient and long-lasting
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- Additional heating methods with steam: reheating, dough proving
- Energy consumption 4D hotAir 0.69kWh











# 10700 HM656GNS6B Black, stainless steel

Single multi-function oven with TFT touchDisplay

- Capacity 67 litres; 5 shelf positions
- varioSpeed 50% time-saving
- softMove drop down oven door effortless opening and closing
- LED illumination efficient and long-lasting
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Additional heating methods with microwave: microwave (5 power levels)
- Microwave inverter technology

# 10700 HB656GBS6B Black, stainless steel

Single multi-function oven with TFT touchDisplay Plus

- Capacity 71 litres: 5 shelf positions
- softMove drop down oven door effortless opening and closing
- LED illumination efficient and long-lasting
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Energy consumption 4D hotAir 0.69kWh









# 10700 HB632GBS1B Black, stainless steel

# Single multi-function oven with TFT Display

- Capacity 71 litres; 5 shelf positions
- softMove drop down oven door effortless opening and closing
- Halogen light
- 8 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, pizza setting, coolStart
- ecoClean® back panel
- Energy consumption 4D hotAir 0.69kWh

# iQ500 HB535A0S0B Black, stainless steel

Single multi-function oven with lightControl display

- Capacity 71 litres; 5 shelf positions Halogen light
- 5 main functions: 3D hotAir, hotairGentle, top/bottom heating, hot air grilling, full width grill
- cookControl 10
- ecoClean® back panel
- Energy consumption 3D hotAir 0.81kWh

# They are top of the range for a reason.

Siemens ovens have a range of high-end features that are consistent no matter which model you choose. With outstanding design and quality materials, you can be confident a Siemens oven will offer you the lastest functions with ease and enjoyment.

Best cooking results regardless of which shelf you choose.

## 3D hotAir

For up to three levels of simultaneous cooking without any intermingling of flavours.

# 4D hotAir

Be flexible with your cooking. Choose which shelf you want to cook your food on, now with even more choice. The innovative technology of the fan motor enables optimum heat distribution around the interior of the oven, as the oven is programmed to change the rotating direction of the fan every few minutes. Your food therefore always turns out perfectly, just as you want it, no matter which shelf you choose to place it on.





Everything put in a good light. Depending on the model, there are different kinds of illumination inside the oven. Whether it's the standard Halogen light, LEDs or the most advanced Multilevel LED strip, they all provide a brilliant view of your dishes without having to open the oven door.

Ovens | Built-in and built-under ovens Accessories | Ovens

# Built-in and built-under double ovens







# iQ500 MB557G5S0B Black, stainless steel

Built-in double multi-function oven with lightControl display Built-in double multi-function oven with lightControl display

- Capacity 71 litres, 5 shelf positions Halogen light
- 7 main functions: 3D hotAir. hotairGentle, top/bottom heating, hot air grilling, full width grill, pizza setting, bottom heat
- cookControl 10
- roastingSensor
- ecoClean® back, roof and side panels
- Energy consumption 3D hotAir -

- Capacity 34 litres, 3 shelf positions
- · Halogen light • 4 main functions: top/bottom heating, full width grill, centre
- surface grill, bottom heat • ecoClean® – back, roof and side panels
- Energy consumption top/bottom heating - 0.83kWh
- Main lower oven
- Capacity 71 litres, 5 shelf positions
- Halogen light • 5 main functions: 3D hotAir. hotairGentle, top/bottom heating,
- cookControl 10
- hot air grilling, full width grill • ecoClean® – back panel
- Energy consumption 3D hotAir -

# Secondary top oven

10500 MB535A0S0B Black, stainless steel

- Capacity 34 litres, 3 shelf positions
- Halogen light • 4 main functions: top/bottom
  - heating, full width grill, centre surface grill, bottom heating
  - ecoClean® back, roof and side panels
  - Energy consumption top/bottom heating – 0.83kWh





# iQ500 NB535ABS0B Black, stainless steel

Built-under double multi function oven with lightControl display Built-under double multi function oven with lightControl display

# Main lower oven

• Capacity – 47 litres, 3 shelf positions

iQ500 NB557ABS0B Black, stainless steel

- Halogen light
- 7 main functions: 3D hotAir, hotairGentle, top/bottom heating, hot air grilling, full width grill, pizza setting, bottom heating,
- ecoClean® back, roof and side panels
- Energy consumption 3D hotAir -

## Secondary top oven

- Capacity 34 litres, 3 shelf positions
- Halogen light
- 4 main functions: top/bottom heating, full width grill, centre surface grill, bottom heating
- ecoClean® back, roof and side panels
- Energy consumption top/bottom heating – 0.83kWh

## Main lower oven

- Capacity 47 litres, 3 shelf positions • Halogen light
- 5 main functions: 3D hotAir, hotairGentle, top/bottom heating, hot air grilling, full width grill
- ecoClean® back panel
- Energy efficiency 3D hotAir –

# Secondary top oven

- Capacity 34 litres, 3 shelf positions
- Halogen light
- 4 main functions: top/bottom heating, full width grill, centre surface grill, bottom heating
- ecoClean® back, roof and side panels • Energy efficiency top/bottom heating

# Rail Systems: The perfect accessories, designed especially for your iQ700 and iQ500 ovens.


We supply accessories that help make cooking easier and more enjoyable for you. Great for tailoring your oven to your individual needs both the telescopic and varioClip rail options offer ease of use and flexible cooking options to help you create the perfect dish.

## iQ700 telescopic rails

Selected Siemens iQ700 ovens offer a single level, fully extendible telescopic rail<sup>1</sup>. Designed to glide smoothly and effortlessly out of the oven, these rails offer clear and comfortable access to tend to your food during cooking and to remove the food once cooked without having to reach into the hot oven. Optional single or triple telescopic rail sets are available for all models in the iQ700 range<sup>2</sup>, including versions suited to pyrolytic models which can remain in the appliance during the cleaning cycle, allowing you to effortlessly clean the oven and the rails at the same time.

## iQ500 varioClip rails

Selected Siemens iQ500 models<sup>1</sup> feature a pair of innovative varioClip telescopic rails. Cleverly designed with an easy release system, these rails can be unclipped and repositioned on any of the five shelf positions in the oven<sup>3</sup>, allowing you to tailor the position to suit what you are cooking. Whether grilling bacon for breakfast on one of the higher positions, or opting for a lower rail position to cook the Sunday roast, these fully extendible rails perfectly combine flexibility and convenience. Additional pairs of varioClip rails are available as optional extras, allowing you to personalise the rail systems for your oven.



<sup>3</sup> varioClip rails suited only to the main oven on double ovens







Level independent telescopic rails - designed to be released and repositioned quickly and easily

To view all available accessories in the oven range please see the table found in the Product Specification and Installation Guide at the back of this brochure on page 8.

# Design co-ordinated Compact Appliances.





# Microwave Combination Ovens\*

These models are designed to provide more 

Inverter Technology delivers microwave functionality than a solo microwave oven, focussing on combination cooking, with the traditional microwaves are only able to microwave using higher power (max. 600W) to lead the cooking process, supported by hot air or grill functions to deliver speedy crisp and browned results. Based around a more traditional microwave functionality these models offer the perfect solution if regular microwave heating is the priority, but with the back-up of separate or combination hot air cooking and grill functionality if required.

# Ovens with integral microwave\*

When teamed with a single oven, Siemens compact ovens with microwave offer a great alternative to a double oven if you require more space for traditional cooking. Designed first and foremost to function as an oven, with construction, features and functions identical to a traditional single oven, these models benefit from the addition of microwaves at low medium power (max. 360W) to deliver oven-led combination cooking, which speeds up the cooking process while retaining traditional

# Inverter Technology

power constantly while cooking - other, deliver maximum power and manage the differing settings by alternating between on and off for specific time periods. This can result in uneven heating or over-cooked food and can be especially damaging to more delicate foods or smaller portions.

With Inverter technology, the microwave delivers power constantly, gradually managing the power levels down over time in order to control the food temperature. This gentle approach to cooking reduces uneven heating or overheated food and is especially beneficial for delicate foods. It may be necessary to adjust cooking times to ensure foods are thoroughly cooked

Siemens recommends that the maximum power setting be used for heating liquids and the microwave is calibrated to provide a burst of high power initially, before managing the power down in stages to the next level over the first few minutes.

\*These models are designed to operate best in combination mode, so when heating using microwave only, it may be necessary to adjust

# iQ700

Designed to complement iQ700 single ovens, the iQ700 range of specialist compact appliances has something to meet all requirements.

Whether it is an additional compact model with integral microwave to act as a second oven, or the specialist microwave oven, Siemens has options to suit all requirements.

Steam and added steam cooking has increased in popularity in the past few years. Not only does this offer a more healthy cooking option, steam also retains vitamins and nutrients as well as maintaining the visual appeal of many foods. The Siemens compact steamer and steam combination ovens provide the benefit of steam together with perfect design coordination.

If coffee is your passion, then why not opt for the Siemens coffee centre - designed to coordinate with the iQ700 range, this versatile machine will provide a variety of specialist coffees at the touch of a button.

The Siemens iQ700 range also includes warming drawers. Primarily designed to pre-heat crockery and keep cooked food warm, these drawers can also slow cook, prove dough and defrost. Available in 14cm or 29cm high options, they link perfectly with single ovens and 45cm compact models in column or side by side in block installations.

For optimum design coodination, choose coordinating iQ700 models with the same TFT displays.

# iQ500

Siemens offers a choice of two coordinating iQ500 45cm compact microwave combination ovens, each featuring the same striking blue and white lightControl display as the iQ500 single ovens.

Compact appliances

The standard microwave combination oven features a large 36cm diameter turntable and microwave combination cooking options.

Alternatively, the innovative CP565AGS0B features not only microwave and oven functionality, but also full steam and steam combination options – the ultimate in combination cooking and perfect for maximising your options if space is a premium

Both these compact combination ovens are complemented by a 14cm high warming drawer to ensure complete iQ500 design

Just need a microwave? The iQ500 range is completed by two design coordinated solo microwaves – a 25L version for installation in tall housing and a smaller 20L model design to fit into 30cm deep wall cupboards.

Models shown on previous page: CS658GRS6B compact steam combination oven, BI630CNS1B warming and accessory drawer and HM678G456B single multi-function oven Models shown above: CP565AGS0B compact microwave and BI510CNR0B warming drawer

# Compacts feature guide.

## Reference key:



Model does have this feature



Model does not have this feature

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model

# Key functionality - compact45 Appliances



Energy efficient ovens Siemens compact45 hot air and hot air steam appliances achieve a European Class A+ rating for energy efficiency.



Wi-Fi ready With Wi-Fi enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.



activeClean® Heating the cavity up to 480°C, activeClean® burns away all dirt and grime to save time. On iQ700 compact appliances the self-cleaning feature can also be used with pyrolytic proof telescopic rails and bars.



ecoClean® A direct coating that lines the back, roof and side of the oven, ecoClean® makes cleaning the oven easy. The coated area cleans itself while the oven is on or can be activated with a cleaning programme. Available either as a full coating or exclusively on the back panel.



fullSteam Enjoy healthier meals created by the power of steam. With juicy meats and crunchy vegetables cooked to perfection, culinary creations will be second to none.



pulseSteam Prepare perfectly juicy and crispy dishes with pulseSteam and other cooking functions like hot air to create a wider variety of meals that make the appliance more flexible.



cookControl Plus Offering you a variety of different programmes for fresh and frozen foods. Once the desired programme is selected and weight entered, the oven automatically selects the best setting, controls the exact cooking time and switches off when the meal is done.



varioSpeed By choosing the integrated microwave function with a conventional cooking option, you can speed up the preparation of dishes by up to 50%.

# Other product features – Compact Appliances

# coolStart

No more preheating the oven when cooking frozen convenience food. Using an intelligent heating phase, it's now possible to successfully cook frozen food quickly and without the need to wait for the oven to preheat.

# Defrost (steam)

Quicker than regular defrosting, steam defrosting gently puts moisture back into food as it defrosts. This speed allows spontaneous meals, without the need to pre-plan.

# Dough Proving

The oven creates the perfect environment for proving dough, so you don't have to, leaving you to enjoy your time until the dough is ready.

## Reheating (steam)

Using steam puts life back into food using moisture, making food taste just as delicious the second time round. A great solution if consumers need a meal in a hurry.

## softMove

For a calmer kitchen, when you open or close your oven door the intelligent dampers ensure that the oven door is left to open and close gently and quietly. Available on all iQ700 built-in ovens.

cookControl provides automatic programmes for the perfect preparation of meat, fish, vegetables and bread. Simply select the desired dish and enter the food's weight – everything else is done automatically. Either 10, 15 or 30 programmes available, depending on the model.

# Coffee Centre



Wi-Fi ready With Wi-Fi enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.



aromaDoubleShot For coffee that is extra-large or extra-strong aromaDoubleShot supplies an extra boost when it is needed the most. Because the second shot uses a new set of beans, there is no compromise on flavour



individualCupVolume Precisely the right amount of coffee – exactly how you want it. individualCupVolume provides millilitre precision to cup sizes, so that your favourite coffee fits into your favourite cup perfectly.



myFavourite Choose your ideal coffee settings to save as a favourite. myFavourite allow you and your family or friends to store their favourite settings in the menu to quickly select a custom coffee. Choose from options such as the strength or size of the coffee and then save with your name.



oneTouch function The simple yet stylish controls allow the serving of perfect coffee every time – ideal for impressing friends, as well as for day to day life.



sensoFlow system Different coffees require the espresso shot to be heated at a different temperature to achieve the perfect result. sensoFlow does this automatically, providing you with a delicious beverage again and again.

# Microwaves



Microwave The microwave can be used with different power levels up to 900W.



Grill Cook with a combination of variable quartz grill and microwave with power levels of 360W, 180W and 90W for browning of food while cooking.



**Compact appliances** compact45 oven | Compact appliances

# compact45 oven

For the perfect built-in kitchen that is bespoke to you, look no further than the Siemens range of iQ700 and iQ500 compact45 appliances.





# iQ 700 CB675GBS1B Black, stainless steel

Compact pyrolytic oven with TFT display

- Capacity 47 litres; 3 shelf positions
- softMove drop down oven door effortless opening and closing
- Halogen light
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Energy consumption 4D hotAir 0.61kWh



# Steam cooking. The healthy way to cook.

Siemens compact45 steam ovens and compact45 steam ovens with microwaves make healthy cooking quicker and easier. By using the fullSteam and pulseSteam functions, they allow you to cook quickly with hot steam which means the foods retain their flavours, vitamins, minerals and appearance.



Ideal for vegetables and fish, pure fullSteam cooking has many health benefits as well as creating tasty dishes. Only hot steam is used to cook the food which is perfect for rice, fish and vegetables. You therefore retain the food's full flavour, colour, vitamins and minerals. The new iQ700 compact steam ovens are easier to use, even for someone who has never cooked with steam before.



Used in combination with a conventional cooking function, pulseSteam can be added with three intensities. Prepare perfectly crispy and juicy dishes, ideal for adding moisture and avoiding dried out food when reheating. It's also quicker to defrost food too. pulseSteam offers more flexibility in just one appliance.

## How does it work?

Siemens steam and steam combination ovens are quick and easy to install as they don't need plumbing-in. The removable 1 litre water tank (1.3 litre for steamer) is accessed behind the semi-automatic control panel making it more convenient and easier to refill, even during cooking. Water is fed into the oven cavity and heated by a fast and efficient steam generator, thermostatically controlled to allow pure steam temperatures of 30 – 100°C.



# compact45 steam ovens and compact45 ovens with microwave



















## Compact steam combination oven with TFT touchDisplay Plus

- Capacity 47 litres; 3 shelf positions
- Steam functions: fullSteam, pulseSteam, reheating, dough proving, defrost, steam combination cooking
- softMove drop down oven door effortless opening and closing
- roastingSensor Plus and bakingSensor: detect the exact moment when your food is done
- LED light
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- Energy consumption 4D hotAir 0.61kWh

# 10,700 CS656GBS6B Black, stainless steel Compact steam combination oven with TFT touchDisplay

- Capacity 47 litres; 3 shelf positions
- · Steam functions: fullSteam, pulseSteam, reheating, dough proving, defrost, steam combination cooking
- softMove drop down oven door effortless opening and closing
- LED Illumination
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Energy consumption 4D hotAir 0.61kWh





For more information on microwave combination ovens, ovens with integral microwave and appliances that feature inverter microwave technology please see page 26.

# 10700 CD634GBS1B Black, stainless steel

# Compact steamer with TFT Display

- Capacity 38 litres; 4 shelf positions
- softMove drop down oven door effortless opening and closing
- Halogen Illumination: for precise lighting
- 4 main functions with steam: steam, reheating, dough proving, defrost













# 10700 CM678G4S6B Black, stainless steel

## Compact pyrolytic oven with integral microwave and TFT touchDisplay Plus

- Capacity 45 litres; 3 shelf positions
- varioSpeed: reduce cooking times by up to 50%
- softMove drop down oven door effortless opening and closing
- roastingSensor Plus and bakingSensor: detect the exact moment when your
- LED Illumination
- 15 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, intensive, coolStart, pizza setting, bottom heating, low temperature cooking, keep warm, dehydrate, plate warming
- Additional heating methods with microwave: Microwave, Combi microwave variable
- · Microwave inverter technology

# 10700 CM676GBS6B Black, stainless steel

- Capacity 45 litres; 3 shelf positions
- varioSpeed: reduce cooking times by up to 50%
- softMove drop down oven door effortless opening and closing • LED Illumination
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming

Compact pyrolytic oven with integral microwave and TFT touchDisplay

- · Additional heating methods with microwave: Microwave, Combi microwave variable
- Microwave inverter technology









# 10700 CM656GBS6B Black, stainless steel

# Compact oven with integral microwave and TFT touchDisplay

- Capacity 45 litres: 3 shelf positions varioSpeed: reduce cooking times by up to 50%
- softMove drop down oven door effortless opening and closing
- LED Illumination
- 13 main functions: 4D hotAir, hotairGentle, top/bottom heating, top/bottom heating Gentle, hot air grilling, full width grill, half width grill, coolStart, bottom heating, low temperature cooking, keep warm, plate warming
- Additional heating methods with microwave: Microwave, Combi microwave variable
- · Microwave inverter technology

# iQ700 CM633GBS1B Black, stainless steel

# Compact oven with integral microwave and TFT Display

- Capacity 45 litres: 3 shelf positions
  - varioSpeed: reduce cooking times by up to 50%
  - softMove drop down oven door effortless opening and closing
  - LED Illumination
  - 6 main functions: 4D hotAir, hotairGentle, hot air grilling, full width grill, half width grill, keep warm
  - Additional heating methods with microwave: Microwave. Combi microwave constant
  - · Microwave inverter technology

Compact appliances | compact45 ovens with microwave compact45 coffee centre | Compact appliances

# compact45 ovens with microwave and compact 45 coffee centre















# 10700 CF634AGS1B Black, stainless steel

# Compact microwave with TFT Display

- Capacity 36 litres; 3 shelf positions
- LED Illumination
- 7 automatic programmes
- 1 main function: microwave
- Microwave inverter technology
- Max. power: 900 W; 5 microwave power settings (90W, 180W, 360W, 600W, 900W)

# 10500 CP565AGSOB Black, stainless steel

Compact microwave and steam combination oven with lightControl display

- Capacity 36 litres; 5 shelf positions
- Electronic control
- LED Illumination
- Microwave inverter technology max. power 1000W
- . Steam and added steam functions
- 3 main functions: hotAir, Quartz grill, hot air grilling
- · Microwave, oven and added steam combination options
- cookControl 30
- ecoClean® back liner
- Design coordinated with iQ500 ovens and warming drawer







# Pure precision for perfect coffee indulgence: Whatever you want, however you like it.

Stunningly, uniquely Siemens, our iQ700 coffee centre conveys an elegant impression of absolute quality and intelligent innovation for those passionate about coffee.

The design of the iQ700 coffee centre is perfectly aligned with the entire iQ700 series. To keep the sleek lines looking clean, all milk, water and bean containers are conveniently hidden behind the coffee centre's door, while the TFT touchDisplay and LED lights put each coffee in the spotlight.

Designed with easy access to the water tank, bean holder and insulated milk jug, the coffee centre has front access thanks to a hinged front panel – so it's quick to replace the water or beans. The milk tubes are also cleaned with steam after every coffee with milk and as most of the components are removable and dishwasher safe, they are also easy to clean. Easy to install, the machine requires no extra plumbing.



Different coffees require the espresso shot to be heated at a different temperature in order to achieve the perfect result. sensoFlow does this automatically, providing you with a delicious beverage again and again.





# 10500 CM585AMS0B Black, stainless steel

Compact microwave combination oven with lightControl display

- Capacity 44 litres
- Flectronic control
- LED Illumination
- Microwave max. power 900W
- 3 main functions: hotAir, grill, hot air grilling
- Microwave and oven combination options
- cookControl 15
- 360mm diameter metal turntable
- Design coordinated with iQ500 ovens and warming drawer













## Coffee centre witTFT touchDisplay

- TFT touchDisplay
- oneTouch function
- Frothing nozzle
- aromaDoubleShot provides flexibility in strength and size
- myCoffee: memory function saves up to 8 individual beverages with names to make your perfect coffee at the touch of a button
- sensoFlow system
- DoubleCup
- Separate container for pre-ground coffee giving you the flexibility to create the perfect decaf coffee without the need to change the bean

# Microwave ovens and warming and accessory drawers









# **IQ700** BE634LGS1B Black, stainless steel

## Microwave with TFT Display

- Capacity 21 litres • Left hinged door
- LED Illumination
- 2 main functions: microwave, variable quartz grill
- 10 automatic programmes
- · Microwave inverter technology
- Max. power: 900W; 5 microwave power settings (90W, 180W, 360W, 600W, 900W)
- Combination of grill and microwave power levels: 360W, 180W, 90W

- Capacity 21 litres
- Left hinged door
- LED Illumination
- 1 main function: microwave
- 7 automatic programmes
- · Microwave inverter technology

• 1x glass pan & 1x grid included

### Microwave with TFT Display

- Max. power: 900W; 5 microwave power settings (90W, 180W, 360W, 600W, 900W)

10700 BF634LGS1B Black, stainless steel



10 500 BF555LMS0B Black, stainless steel







# IQ 500 BF525LMS0B Black, stainless steel

## Microwave with white LCD display

- Capacity 25 litres
- Left hinged door
- LED Illumination
- Microwave max. power 900W
- 7 automatic programmes
- 315mm diameter glass turntable
- Installation in a tall housing
- Design coordinated with iQ500 ovens

- Microwave with white LCD display
- Capacity 20 litres
- Left hinged door
- LED Illumination
- Microwave max. power 800W
- 7 automatic programmes • 255mm diameter glass turntable
- Installation in a tall housing or wall unit
- Design coordinated with iQ500 ovens

# **Warming Drawers**

Perfect for warming plates, a Siemens warming drawer will keep food warm for latecomers. With adjustable temperatures of 40-80°C, a four-setting iQ700 14cm or 29cm high warming drawer can be installed as a standalone appliance, or acts as the perfect accompaniment to Siemens iQ700 ovens and compacts. The iQ500 range also includes a 14cm high warming drawer featuring 3 settings, designed to coordinate with Siemens iQ500 ovens and compacts.



# iQ700 BI630DNS1B Black, stainless steel

Warming and accessory drawer

- Capacity 52 litres
- 290mm high
- Handleless push-pull opening mechanism
- Telescopic pull-out drawer
- Can accommodate up to 40 plates, 192 espresso cups
- Weight capacity 25kg
- Suitable for dough proving
- Design coordinated with iQ700 ovens and compacts









# iQ700 BI630CNS1B Black, stainless steel

Warming and accessory drawer

- Capacity 20 litres
- 140mm high
- Handleless push-pull opening mechanism
- Telescopic pull-out drawer
- Can accommodate up to 12 plates, 64 espresso cups
- Weight capacity 25kg
- Suitable for dough proving
- Design coordinated with iQ700 ovens and compacts

# iQ500 BI510CNROB Black, stainless steel

# Warming drawer

- Capacity 23 litres
- 140mm high
- Handleless push-pull opening mechanism
- Telescopic pull-out drawer • Can accommodate up to 14 plates, 64 espresso cups
- Weight capacity 15kg
- Design coordinated with iQ500 ovens and compacts

# Hobs. Induction, ceramic and gas hobs.

The Siemens hob range combines eye-catching design with razor-sharp looks, together with innovative technology and ergonomic design.

All created to coordinate beautifully with other Siemens appliances.

Advanced technology in our hobs ensures your cooking is as enjoyable as possible with time-saving features that help you to get on with the cooking when you need to.

With the Siemens range of hobs, you can choose from a wide range of sizes, styles and cooking types to suit your needs and kitchen design. Continue reading to find out more.







# Combining induction technology with powerful extraction, the inductionAir hob is intelligently designed for your kitchen.

# inductionAir venting hob

The inductionAir venting hob gives you the freedom to design your kitchen how you want to, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is designed to completely protect against spillages and over-boiled liquids.

## How does it work

All parts of the inductionAir venting hob are neatly arranged in a liquid tray unit, accessed from the top of the hob. Each of the parts are dishwasher proof, including the cast iron and black glass air inlet grid, the 2-in-1 grease filter and the liquid tray. Each part is also separate to save space in your dishwasher.

## Protects from spills

As a first layer of protection, the cast iron and black glass air inlet grid is designed to limit the flow of liquids into the ventilation module. As a second layer of protection, the liquid tray captures up to 200ml from day-to-day cooking and can be easily discarded. As a special layer of protection, up to 2 litres of liquid can be held in the liquid safety tank, accessed from beneath the appliance, protecting the appliance from further damage. This means you can focus on your cooking with complete peace of mind.

# flexInduction. Enjoy a new cooking experience.




## flexInduction

A hob that fits in with your lifestyle, flexInduction is no-compromise cooking at its best.

Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to your needs, enabling you to use a small area as traditional induction hobs with four or five separate zones, for boiling rice, for example, or you can choose to link the zones together to form one zone for larger cooking pans. The new extended cooking surface can accommodate pans of any size, even several pans placed anywhere on the surface at the same time. With all the advantages of induction cooking, flexInduction also includes boost settings, automatic pan recognition and touchSlider controls.

Each flexInduction zone uses four innovative elongated oval inductors beneath the glass, each of which can act independently to sense the presence of cookware on the hob. Only if cookware is detected will the individual inductors work, ensuring efficient operation whether a 10cm diameter milk pan is placed in one corner or a large griddle plate covers the whole zone. With only specific areas active at any particular time, no energy is wasted. And for an even more versatile cooking experience the newly designed triple flexInduction hob provides the ultimate in flexible cooking with three flexInduction zones, fitting in with your lifestyle, flexInduction is no-compromise cooking at its best.

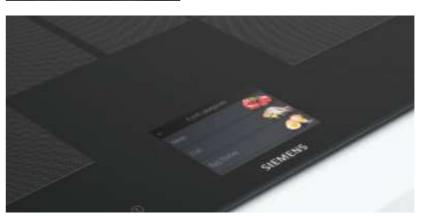

# flexInduction Plus

One thing less to worry about. With flexInduction Plus, your hob automatically knows how large your cookware is. This provides even heat with the use of an additional central zone if the hob detects that the pan is too large.

For 80cm flexInduction Plus hobs, there are two additional zones which are used for either the left or right flexInduction zones and cannot be used together. For 60cm flexInduction Plus hobs, no matter which side of the pan goes over, a central zone is automatically added.

# Put your finger on innovation:

# TFT touchDisplay

## TFT touchDispla

With the innovative TFT touchDisplay, you can now get the most out of your Siemens induction hob. The full colour touch screen is intuitive and easy to use with clear information about your hob's status at all times as well as additional settings that open up a new world of possibilities. Choose the settings for each individual cooking zone and combine the zones as you like – for example, for different sizes of cookware and various accessories. Access a new world of recipes which can help you cook the perfect dish in just a few simple steps, complete with images and clear text. Take control of your Siemens induction hob and enjoy the advanced design with perfectly prepared meals.



## Dual lightSlider

Operate with intuition. The new dual lightSlider lets you easily select and join the cooking zones of the iQ700 Induction Hobs via one neatly arranged interface that illuminates when the hob is turned on. To adjust the power level of the cooking zones simply slide your finger along the lit scale or select the desired power level directly with precise control. When the hob is switched off, the controls are completely invisible for a sleek finish to your kitchen. As there are no protruding parts, cleaning is made even easier.



## touchSlide

The ergonomic touchSlider sits flush to the appliance and allows you to slide your finger across the power level scale to the desired setting, with control advances in half-levels from 1 to 9. You can also touch the desired level directly for faster adjustments to the cooking zone temperature.



# Key functionality – Induction



Wi-Fi ready With Wi-Fi enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.



**combiZone** allows you to connect two induction zones together, suitable for larger pots and pans.



powerBoost increases the power output of selected zones by up to 50% to provide quicker heating and cooking times.



touchControl Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface and make cleaning even easier.



Width Our hob range is available in a range of widths to suit your kitchen design and needs.



flexInduction The flexInduction cooking area is tailored to your needs, enabling you to use a small area for small pans, or the entire zone for large cooking pots.



TFT touchDisplay Operate your iQ700 induction hob with a large touchscreen colour display giving you an excellent overview of settings and intuitive control.



touchSlider The stylish and ergonomic touchSlider allows you to simply slide your finger across the touchSlider temperature scale to the desired setting. All 60cm models are controlled with one single 9.5cm touchSlider control, while the extra wide models have one, four or five touchSlider controls.

# Ceramic



Width Our hob range is available in a range of widths to suit your kitchen design and needs.



controlPanel Lock With the childproof lock button, you can quickly and easily protect the hob against unauthorised operation. The childproof lock blocks all the hob's functions at the touch of a button. Locking is cleared by pressing the button again and holding down for a few seconds.



touchControl Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface and make cleaning even easier.



touchSlider The stylish and ergonomic touchSlider allows you to simply slide your finger across the touchSlider temperature scale to the desired setting. All 60cm models are controlled with one single 9.5cm touchSlider control, while the extra wide models have one, four or five touchSlider controls.

# Gas



Width Our hob range is available in a range of widths to suit your kitchen design and needs.



Cast Iron Cast iron pan supports are designed to withstand even the heaviest of pots and pans and provide a sleek finish to each hob. All can be removed for easier cleaning and iQ700 models have dishwasher safe pan supports.



Power Level Display Thanks to a display next to each control, the exact power level is clearly displayed so you can see what power you are cooking with at a glance.



Reference key:

Model does have

this feature

stepFlame technology No more leaning over to check the flame size. All this guesswork has been removed from cooking with gas thanks to stepFlame technology which gives a range of flame levels for more control with your cooking.

Model does not have this feature



Black Glass Finished in a contemporary black glass design to coordinate with other Siemens appliances and seamlessly fit into your kitchen.



frontControl Gas hobs with frontControl feature all controls at the front of the appliance for ease of use.



Stainless Steel Finished in a high quality stainless steel design to complement your kitchen.



Wok burner Siemens gas hobs feature wok burners to deliver higher power, meeting the increasing demand for high speed cooking.

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model.



**Hobs** | inductionAir hobs inductionAir and flexInduction hobs | Hobs

# inductionAir and flexInduction hobs





The inductionAir hob features an efficient and powerful extractor in just the one appliance, opening up new possibilities for flexible kitchen design. The hob has flexInduction zones, which mean that the cooking areas can be extended and linked together to form bigger cooking zones for larger cooking pans or accessories.

Combining induction technology with powerful extraction, the iQ700 inductionAir hob is intelligently designed for your kitchen.


The inductionAir System combines two great appliances: a flexInduction hob and the revolutionary new integrated ventilation. Thanks to this space-saving concept, you can enjoy more freedom and create an outstanding kitchen design.



# iQ 700 EX875LX34E

### Black glass 80cm





- 2 flexInduction zones Dual lightSlider control
- flexMotion
- fryingSensor Plus
- powerMove
- climateControl sensor
- iQdrive motor
- powerBoost function • 2 stage residual heat indicators (H/h)
- Count up timer
- Stainless steel side trim
- Suitable for ducted or recirculating





















# iQ500 ED851FS11E Black glass

10700 EX975KXW1E Black glass

# 90cm

## inductionAir hob

- touchSlider control
- powerMove
- iQDrive motor
- powerBoost function • 2 stage residual heat indicators (H/h)
- 3 sided bevel edge
- Suitable for ducted or recirculating installation

# flexInduction hob

- 3 flexInduction zones
- fryingSensor Plus
- powerMove
- cookingSensor Plus ready cookConnect
- · powerBoost function
- 2 stage residual heat indicators (H/h)
- · Count up timer
- Stainless steel side trim
- Compatible with domino hobs









# iQ700 EX975LXC1E Black glass

# 10700 EX875KYW1E Black glass

# 80cm

# flexInduction hob

- 3 flexInduction zones
- fryingSensor Plus
- powerMove Plus • powerBoost function
- Residual heat indicators (H/h)
- Count up timer
- Stainless steel side trim

- Compatible with domino hobs

- flexInduction hob
- 2 flexInduction Plus zones
- flexMotion
- fryingSensor Plus
- powerMove
- cookingSensor Plus ready
- cookConnect
- powerBoost function
- 2 stage residual heat indicators (H/h)
- Count up timer
- · Stainless steel side trim
- Compatible with domino hobs

# flexInduction hobs















10,700 EX675JYW1E Black glass	60cm iQ	700 EX975LVV1E Black glass	90cm
flexInduction hob	flex	nduction hob	
2 flexInduction Plus zones	• 2	lexInduction + 32cm Triple zone	
flexMotion	• fle	xMotion	
fryingSensor Plus	• fr	ringSensor Plus	
• powerMove	• pc	werMove	
cookingSensor Plus ready	• cc	okConnect	
• cookConnect	• pc	werBoost function	
powerBoost function	• 2	stage residual heat indicators (H/h)	
• 2 stage residual heat indicators (H/h)	• Co	unt up timer	
Count up timer	• St	ainless steel side trim	
Stainless steel side trim	• Co	mpatible with domino hobs	



• Compatible with domino hobs







### 10,700 EX879FVC1E Silver glass 80cm EX679FEC1E Silver glass 60cm flexInduction hob flexInduction hob • 1 flexInduction + 3 zones • 1 flexInduction + 2 zones • fryingSensor Plus • fryingSensor Plus • powerBoost function • powerBoost function • 2 stage residual heat indicators (H/h) • 2 stage residual heat indicators (H/h) Count up timer Count up timer Stainless steel side trim Stainless steel side trim










iQ700 EX675LXV1E Black glass	60cm EX275FXB1E Black glass	90cn
flexInduction hob	flexInduction hob	
2 flexInduction zones     flexMotion     fryingSensor Plus     cookConnect     powerBoost function     2 stage residual heat indicators (H/h)     Count up timer     Stainless steel side trim     Compatible with domino hobs	2 flexInduction zones     powerBoost function     2 stage residual heat indicators (H/h)     Count up timer     Stainless steel side trim	

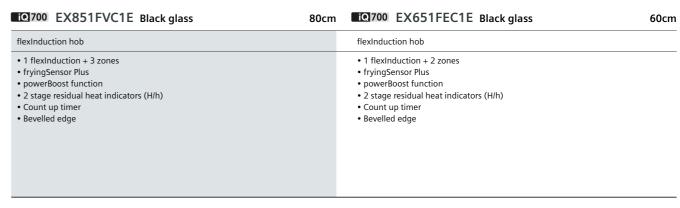

Hobs | flexInduction hobs Induction hobs | Hobs

# flexInduction and induction hobs









60cm

# 10,700 EX875BEB1E Black glass

- 10,700 EX675BEB1E Black glass
- 1 flexInduction + 4 zones
- powerBoost function

flexInduction hob

- 2 stage residual heat indicators (H/h)
- Stainless steel side trim



flexInduction hob

• 1 flexInduction + 4 zones

Stainless steel side trim

• 2 stage residual heat indicators (H/h)

• powerBoost function



# 10700 EX611BEB1E Black glass

# 60cm

• 1 flexInduction + 4 zones

flexInduction hob

- powerBoost function
- 2 stage residual heat indicators (H/h)
- Stainless steel side trim

# Induction cooking – the cool heat.

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available.

When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Easier to clean and safer to use, because the ceramic cooking top is warmed only by the heat transferred back from the cookware and its contents, spillages are less likely to burn on, and there is normally no need to wait for the glass to cool down before simply wiping it over with a cloth. And if you turn on an induction hob without having a pot or pan on it, the hob itself doesn't heat up which reduces the risk of you burning yourself.













### 10700 EH975LVC1E Black glass 10700 ED851FWB1E Black glass 80cm Induction hob Induction hob • 5 induction zones • 5 induction zones

- powerBoost function
- 2 stage residual heat indicators (H/h)
- Bevelled front edge

- combiZone
- powerBoost function
- 2 stage residual heat indicators (H/h)
- Bevelled edge

# Induction hobs

















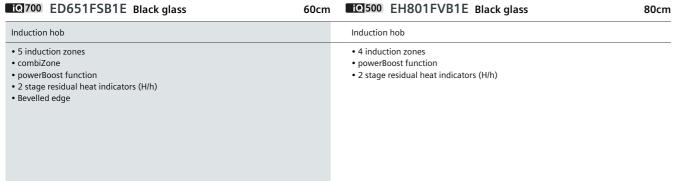










Induction hob  • 5 induction zones • combiZone • powerBoost function • 2 stage residual heat indicators (H/h) • Bevelled edge		• 4 induction zones • powerBoost function • 2 stage residual heat indicators (H/h)	
	WPI		




10 500 EH601FEB1E Black glass	60cm	10100 EH845FVB1E Black glass	80cm
Induction hob		Induction hob	
4 induction zones     powerBoost function     2 stage residual heat indicators (H/h)     Flush-fitting		5 induction zones     powerBoost function     2 stage residual heat indicators (H/h)     Stainless steel frame	

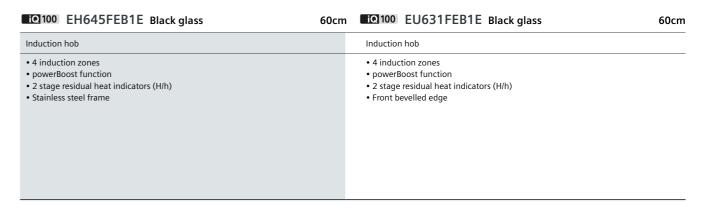





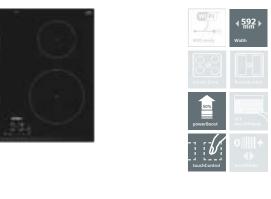


100 EU611BEB1E Black glass	60cm	iQ 100 EU631BEF1B Black glass	60cm
Induction hob		Induction hob	
4 induction zones     powerBoost function     2 stage residual heat indicators (H/h)     Frameless		4 induction zones 13 Amp Plug and Play connection powerBoost function 2 stage residual heat indicators (H/h) Front bevelled edge	

# quickLite ceramic and gas hobs



Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface and make cleaning even easier.



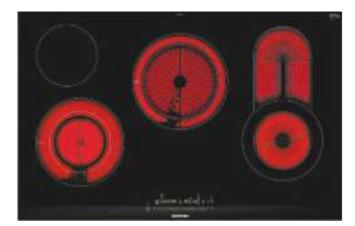









# iQ 300 ET875FCP1D

Stainless steel side trim

quickLite ceramic hob

- 4 guick-lite zones
- 3 dual/extendable zones
- powerBoost function
- 2 stage residual heat indicators (H/h) • Energy consumption display
- Stainless steel side trim
- Compatible with domino hobs









80cm

# 10 100 ET651HE17E Black glass

# 60cm

quickLite ceramic hob

- 4 quick-lite zones
- 2 stage residual heat indicators (H/h)
- Energy consumption display
- Frameless

quickLite ceramic hob

- 4 quick-lite zones
- 2 stage residual heat indicators (H/h)

10100 ET645CEA1E Black glass

· Stainless steel frame

# High performance, high speed. Tradition meets innovation – with

Gas hobs.

their modern functions, Siemens gas hobs provide enjoyment in cooking like a pro.

Our top-of-the-range models feature beautiful and durable black ceramic glass hob bases, with cast iron pan supports for a contemporary look. They are designed to coordinate with other appliances in the iQ700 range, and can be combined seamlessly with iQ700 domino and electric hobs. Low profile, single piece burners on the glass complete the sleek appearance.

## stepFlame technology

Introducing the ground-breaking innovation in gas hobs: stepFlame. Offering 9 precise power levels to give you the control of an electric hob, with gas.

No more leaning over to check the flame size, no more hoping that it is at the right heat level. All this guesswork has been removed fom cooking with gas. From now on, whatever level you choose – you'll get exactly the heat and the flame size you need. It's just as easy to operate as it sounds so conjuring up delicious meals is now easier than ever! It enables you to achieve the precise results you have always dreamt of. Your meals will be delicious, and your guests will be delighted.

LED display with residual heat indicator Together with the new stepFlame technology, selected gas hobs feaure an LED display which clearly shows the power level you have selected at a glance. For added safety, the LED display also shows whether there is any residual heat from the hob indicated by a capital 'H' for hot and a lower

# Flame failure safety device

case 'h' for warm.

0000

All Siemens gas hobs feature a flame failure safety device, which cuts-off the supply of gas to the individual burner should the flame be somehow accidentally extinguished – a crucial safety measure that prevents the build-up of dangerous flammable gas.

## Wok burners

Siemens gas hobs feature wok burners that deliver 3.3kW, 4.0kW, 4.2kW, 5.0kW or 6.0kW of power depending on the model, meeting the increasing demand for high speed cooking. But it is not just about power; they can be turned down to just 0.3kW – perfect for simmering. For the ultimate in flexibility, our 6.0kW and 5.0kW burners are dual control - the inner and outer flame rings can be adjusted independently via a single control.

Model shown: ER9A6SD70

90cm ceramic glass gas hob

# Dishwasher-safe pan supports

All gas on ceramic glass models feature pan supports that are treated with a special patented coating which resists discolouration and the damaging effects of a dishwasher.

# iQ 700 ER9A6SD70 Black ceramic glass 90cm

# Gas hob



- 6.0kW wok burner
- stepFlame technology
- Power level display
- 2 stage residual heat indicators (H/h)
- Cast iron pan supports
- Flame failure safety device
- Stainless steel side trim • Compatible with domino hobs









Hobs | Gas hobs

# Gas hobs

















Gas hob

• 4 burners

• 3.5kW wok burner

• stepFlame technology

• Cast iron pan supports

• Flame failure safety device

EP6A6HB20 Black tempered glass





EC9A5SB90 Brushed steel

• 5 burners

Flag layout

• 5.0kW wok burner

• stepFlame technology

• Cast iron pan supports

• Flame failure safety device



Gas hobs | Hobs



90cm

# 10,700 ER7A6RD70 Black ceramic glass

# 60cm

- 5 burners
- 4.2kW wok burner
- stepFlame technology
  - Cast iron pan supports

  - Flame failure safety device
  - Stainless steel side trim
  - Compatible with domino hobs

- Power level display
- 2 stage residual heat indicators (H/h) • Cast iron pan supports
- Flame failure safety device
- Stainless steel side trim

Gas hob

- 4 burners
- stepFlame technology
- Power level display
- 2 stage residual heat indicators (H/h)

10700 ER6A6PD70 Black ceramic glass















75cm



iQ500 EC7A5RB90 Brushed steel











75cm

# EP9A6SB90 Black tempered glass

# EP7A6QB90 Black tempered glass

# Gas hob


- 5 burners
- 4.0kW wok burner
- stepFlame technology
- · Cast iron pan supports • Flame failure safety device

# Gas hob

- Cast iron pan supports

# EC7A5QB90 Brushed steel



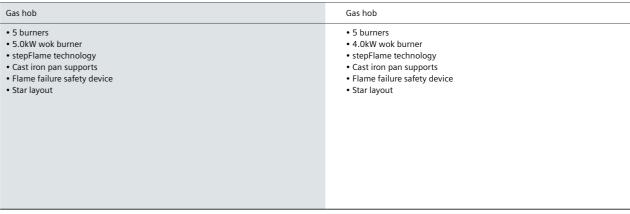

Gas hob

• 5 burners

• 4.0kW wok burner

• stepFlame technology

• Cast iron pan supports

• Flame failure safety device

Hobs | Gas hobs

# Gas hobs

















60cm



EG6B5HB60 Brushed steel

Gas hob

• 4 burners

• 3.3kW wok burner

• Cast iron finish pan supports

Flame failure safety device







60cm IQ300 EG6B5PB60 Brushed steel

• Cast iron finish pan supports

Flame failure safety device

Gas hob

• 4 burners





60cm

	C		1
-			
	8.6.0	rara	

©500 EC715RB90E Brushed steel

Gas hob

• 5 burners

• 5.0kW wok burner

• Cast iron pan supports

Flame failure safety device





- Gas hob
- 4 burners • 4.0kW wok burner
- stepFlame technology
- Cast iron pan supports
- Flame failure safety device
- Diamond layout























# 500 EC6A5HC90 Brushed steel

- 4 burners • 3.5kW wok burner
- stepFlame technology Cast iron pan supports

Gas hob

• Flame failure safety device

# 60cm IQ500 EC6A5PB90 Brushed steel

- 4 burners • stepFlame technology
- Cast iron pan supports
- Flame failure safety device

# 100 EB6B5HB60 Brushed steel

# 60cm E0100 EB6B5PB60 Brushed steel


# 60cm

# Gas hob • 4 burners

- 3.3kW wok burner
- Cast iron finish pan supports
- Flame failure safety device
- Side control

- 4 burners
- Cast iron finish pan supports
- Flame failure safety device
- Side control

60cm



Hobs | Domino hobs Hob acccessories | Hobs

# Domino hobs








eppan Yaki domino hob	flexInduction domino hob	
Teppan Yaki extremely quick heat for Japanese style cooking	•1 flexInduction zone	
2 cooking zones	powerBoost function	
Temperature control	• 2 stage residual heat indicators (H/h)	
touchSlider control	Count up timer	
Removable ceramic black glass lid	Stainless steel side trim	
Stainless steel side trim		







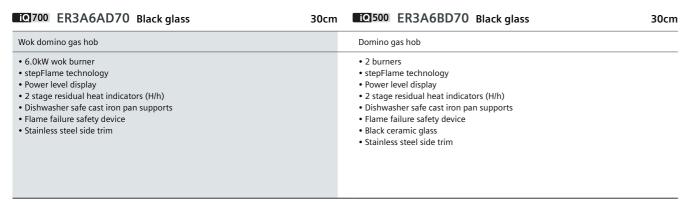



# **Hob Accessories**

For additional cooking flexibility Siemens provide a range of accessories for our flexInduction hobs.





Accessories code: HZ390522



Teppan Yaki Heating extremely quickly the Teppan Yaki is great for fast Japanese cooking. Perfect for a cooked breakfast or a healthy stir-fry, the pan comes in two sizes that fit across either three or four flexInductors.

Accessories code: 2 sizes available 40x20cm **HZ390512** and 30x20cm **HZ390511** 



Roasting dish with steamer Perfect for use with flexInduction hobs this multipurpose dish is a must when cooking for a crowd. A removable steamer insert is available to compliment this dish and perfect for steaming vegetables.

Accessories code: Roasting dish HZ390011 and steamer insert HZ390012

For more details on the range of accessories available please ask your retailer or visit siemens-home.bsh-group.com/uk/store

# Hoods. Outstanding performance, intelligently designed.

Your kitchen is not only a place to cook, it is a place to entertain, relax after a hard day's work, or spend time with friends and family.

Siemens hoods work hard to keep your kitchen space fresh, and full of cleaner air whilst also providing ambient lighting. There's a hood for all kitchen designs, including the new inductionAir which combines our advanced flexInduction hob with a high-performance extractor for even clearer views in your kitchen. See the hobs section for details on the

Whether you choose a top-of-the-range iQ700 wall chimney hood, the state-of-the-art downDraft hood, a classic chimney hood or a canopy hood integrated into your kitchen cupboards. The majority of Siemens hoods come with a quiet and energy efficient motor so you can enjoy your living space.

# When an everyday object turns into a design icon.



# Enjoy a fresher kitchen. Introducing the new downDraft hood.

The finishing touch for your kitchen. Now with flexible installation.

Extract cooking smells at source with the iQ700 downDraft hood, ideal for keeping the sightlines of open plan kitchens. Conveniently placed within the worktop, this elegant hood can be automatically raised when needed, then disappears at the touch of a button. There's no need to worry about losing all your storage space beneath as you can place the motor somewhere more convenient with the remote installation kit.



The LED strip light perfectly illuminates the entire hob surface for a clear view of your cooking.

# Lighting to match your mood.



emotionLight Pro: Choose between 8 different pre-installed colours.



And choose between 256 colours with the Home Connect App.







Today, more and more homes are equipped with open kitchens that blend with the other rooms and become a regular part of the living area. This type of kitchen needs matching appliances to make them appear seamless and impressive to look at.


The Decorative hoods create a seamless statement in your kitchen with the same materials such as black glass, the two-zone stainless steel panel, matching chrome lines and consistent controls.

Your extractor hood, your style, your light: emotionLight Pro

Your extractor hood now adapts to your taste. Simply choose between many different background light colours - for an extractor hood that matches your preferences. The colour range is extendable via the Home Connect App.

# Programmed for convenience

The intuitive user interface allows you to control your Decorative hood exactly as you want it. Control the fan setting, the LED light and the colour of the emotionLight Pro as well as extended functions like the boost mode without any challenge. Furthermore, you can set an automatic delay to let the hood shut itself off after you've finished cooking – for even more convenience.

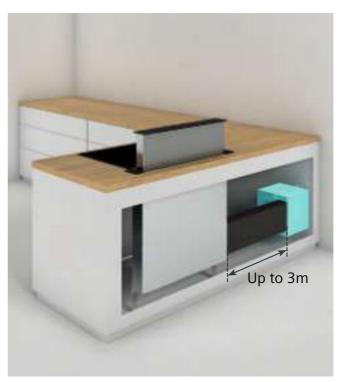

# Improved performance. Premium design.

The Siemens Remote Motor Installation Mounting Kit (LZ29IDM00) frees up space under the worktop and provides the option to mount the motor up to 3 metres away from the appliance. Image for illustrative purposes only. Ducting not supplied.



Model shown: LD97DBM60B downDraft hood



# How to choose your hood.

With the trend for open-plan living, a quiet, efficient and powerful extractor is essential to deal with the strong cooking odours and grease-laden air that can otherwise linger throughout the house. There are two vital points to consider when choosing a hood; the first is whether you want the hood to be ducted or recirculated, and the second is its power rating. Here are some helpful pointers.



# Key functionality



Width Indicates the width and size of the hood. Siemens offer a wide range of hoods to fit different sized niches and with our range of hobs. For optimal results, the cooker hood should be at least as wide as the hob.



emotionLight Pro Adapt the colour of your lights to your taste. Choose between a range of different background light colours directly from the hood or access an extended colour range using the Home Connect App.



Light type: Halogen This type of lighting offers a bright light when cooking.



climateControl sensor The climateControl sensor automatically adjusts the power level of the hood dependent on the level of steam, leading to a pleasant ambience in the kitchen without having to manually adjust the power yourself.





Model does have this feature



Model does not have this feature



Energy efficient hoods\* Siemens hoods feature innovations that make them incredibly energy efficient to run, from our durable and quiet brushless iQdrive motor to LED lighting.



Light type: LED The majority of hoods from Siemens are equipped with state-of-the-art LED lighting, ensuring the hob is illuminated evenly



touchControl Intuitive operation for your hood: touchControl is seamlessly integrated into the front of the hood and operated by the touch of your finger. Cleaning is also even easier.



Wi-Fi ready With Wi-Fi enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model.

\*For individual product energy efficiency ratings please check the icons next to the product specification

# Other product features

# Intensive setting

The intensive setting creates a powerful boost of extraction, perfect for tackling demanding food such as stir fry or steamed vegetables. This ensures moisture is properly eradicated, without misting windows and keeping the kitchen air fresher.

The Boost Position is enabled by slightly pulling the front panel out to capture more steam and draw more air through the hood, which is particularly effective when frying meat or fish.

# touchSlider control

Control the power level by simply sliding a finger across the front of the hood using the touchSlider control. A clear LCD display also shows which functions are currently active. As there are no protruding buttons, hoods with touch controls are also easy to keep clean.

## Ducted or recirculated?

For optimum performance, your extractor hood should be ducted to the outside of the house, so that the extracted air is vented outside. But sometimes this is not practical, so most Siemens hoods can also operate in recirculating mode; where the air is passed through the metal filter to remove grease, and then through a carbon filter to remove odours before being directed back into the kitchen. Although the extraction rate is slightly lower when using this method than ducted extraction and the carbon odour filter will need to be replaced, recirculating the air offers an energy efficient benefit; cool air is retained in the home in the summer and warm air does not vent out during winter months.

# The power to perform

A chosen hood must be powerful enough to effectively remove moisture and cooking odours from a kitchen. The hood should be able to change the air in the kitchen 12 times per hour. Using this quick calculation, you can check whether a hood is sufficiently powerful. Firstly, calculate the volume of the kitchen (HxWxD metres). Next multiply that figure by 12. The resulting figure is the ideal extraction rate required in intensive mode. Match this to a lower power level on the hood to avoid having to run at full power for increased efficiency.



State-of-the-art efficiency Siemens iQ700 hoods feature innovative technology that saves energy. This is thanks to the highly efficient, durable brushless iQdrive motor which is powerful, but requires very little energy to run. Capable of handling odours and grease in the most challenging cooking situations, and specially designed to last longer.

# For example

Room:  $4m \times 4m \times 2.5m = 40m^3$ 

12 changes per hour in intensive operation: 12 x 40m<sup>3</sup> = 480m<sup>3</sup>/h So the hood must achieve >480m<sup>3</sup>/h in intensive mode.

Hoods | modulAir domino hood downDraft hood | Hoods

# modulAir domino hood and downDraft hood



For flexible kitchen planning, our iQ700 modulAir domino hood conveys an elegant impression of absolute quality and intelligent innovation.

The modulAir system efficiently removes unpleasant odours directly next to your cooking, providing more flexibility in open-plan and island kitchen designing. Easily create flexible cooking options combined with electric or gas domino hobs.



The design of touchControl is integrated into the black glass panel for easy control at the touch of a finger, not to mention sleek design and easy cleaning.

# iQ 700 LF16VA570B Stainless steel

modulAir domino hood

- touchControl with 7-segment display
- 3 power levels + 1 intensive settings for stronger smells
- Automatic intensive revert
- Metal grease filter dishwasher safe
- Max. extraction rate (normal): 540m³/h
- Max. extraction rate (intensive): 600m3/h
- Max. noise level: 67dB re 1pW (power level 3 ducted circulation)







For a unique way of extracting, our iQ700 downDraft hood is ideal for installation in an island for open plan kitchens.



Conveniently placed under the worktop, the elegant and unobtrusive downDraft hood can be automatically raised when needed and then lowered when not in use at the touch of a button. Advanced extraction for a sleek finish to your kitchen.



The LED strip light perfectly illuminates the entire hob surface for a clear view of your cooking.

# 10 700 LD97DBM60B Stainless steel and black glass

downDraft hood

- touchControl experience intuitive control
- Electronic control
- 3 power levels + 2 x intensive settings power boost for extra strong smells
- 1 x LED light strip
- Max. extraction rate (normal): 530m³/h
- Max. extraction rate (intensive): 750m3/h
- Max. noise level: 62dB re 1pW (power level 3 ducted circulation) • Flexible motor installation thanks to Remote Inline Motor Installation (Mounting kit accessory required: LZ29IDM00)
- Use with gas hob only possible in air extraction mode









**Hoods** | Ceiling hoods Island hood | Hoods

# Ceiling and island hoods

Installed out of the way, our iQ700 ceiling hood conveys an elegant impression of absolute quality and intelligent innovation.

With this ceiling hood, experience powerful extraction and excellent lighting thanks to the advanced iQdrive motor and LED lights, ideal for installation in open plan kitchens and spaces that require out-of-sight extraction.





# 10700 LF959RE55B Stainless steel

Ceiling hood

- Electronic controls via remote control
- 3 power levels
- Intensive setting for stronger smells
- 1 x LED glass-panel 28W
- · Automatic intensive revert'
- softLight with dimmer function
- Metal grease filter dishwasher safe • Max. extraction rate (normal): 460m3/h
- Max. extraction rate (intensive): 710m³/h
- Max. noise level: 56dB re 1pW (power level 3 ducted circulation)

















# 10700 LF959RB51B Stainless steel io 700 LF959RB21B Matte white

# Ceiling hoods

- Electronic control via soft touch button control
- Remote control
- 3 power levels + 1 intensive setting powerBoost for extra strong smells
- 4 x LED lights
- Intensive operation revert (10 minutes)
- Automatic after-running ensure no smells linger
- Grease filter saturation indicator
- Max. extraction rate (normal): 570m3/h
- Max. extraction rate (intensive): 780m³/h
- Max. noise level: 64dB re 1pW (power level 3 ducted circulation)

















Ideal for installation over island units, our iQ700 island hoods form an elegant design feature for your kitchen.

The Siemens island cube hood is suspended from four cables over your island. The black glass and stainless steel strip design coordinates with other Siemens built-in appliances, while LED lights illuminate your worktop perfectly.



Control your Siemens hood with ease by simply sliding your finger along the touchSlider to select the power level. Stunning design meets sleek control with touchSlider.



# iQ 700 LF31IVV60 Black/steel

# Island hood

- touchSlider control
- 3 power levels + 2 intensive setting
- 4 x LED lights
- Intensive operation revert (6 minutes)
- Automatic after-running ensure no smells linger
- Grease and charcoal filter saturation indicators
- Max. extraction rate (normal): 390m³/h
- Max. extraction rate (intensive): 510m3/h
- Max. noise level: 69dB re 1pW (power level 3 re-circulation)
- Re-circulation only











Hoods | Island hoods Cube hood | Hoods

# Island and cube hoods





### 10700 LF91BA582B Stainless steel

### 90cm

- Electronic control via touchControl
- 3 power levels + 2 intensive settings for stronger smells
- 4 x LED lights
- Boost function
- Grease filter saturation indicator time to change the filter
- Auto intensive revert (6 minutes) keeps energy consumption low
- Automatic after-running ensures no smells linger
- Max. extraction rate (normal): 570m³/h
- Max. extraction rate (intensive): 710m³/h
- Max. noise level: 63dB re 1pW (power level 3 ducted circulation)





90cm

### LF98GB542B Stainless steel

### Island hood

- softTouch button control
- Electronic control and power level display
- 3 power levels + 2 intensive settings for stronger smells
- 4 x LED lights
- softLight with dimmer function creates ambience
- Auto intensive revert keeps energy consumption low
- Automatic after-running ensures no smells linger

- Grease and charcoal filter saturation indicators time to change the filter
- Max. extraction rate (normal): 440m3/h
- Max. extraction rate (intensive): 800m3/h
- Max. noise level: 58dB re 1pW (power level 3 ducted circulation)



### For the perfectly designed kitchen, this iQ700 cube hood blends sleek and unique design with advanced features and powerful performance.

Take control of the hood via Wi-Fi using the Home Connect App on your phone, or make adjustments directly from a cookConnect Hob; so you control the cooking and the ventilation from the same place.



This LC37IVV60B Cube Hood keeps the controls sleek by using touchSlider. Simply slide your finger along the panel to adjust the power level.



33cm

### iQ 700 LC37IVV60B Black

### Cube chimney hood

- touchSlider control
- 3 power levels + 2 intensive setting
- 2 x LED lights
- Intensive operation revert (6 minutes)
- Automatic after-running ensure no smells linger
- Grease and charcoal filter saturation indicators • Max. extraction rate (normal): 330m³/h
- Max. extraction rate (intensive): 400m³/h
- Max. noise level: 67dB re 1pW (power level 3 re-circulated)'
- Re-circulation only









# Angled chimney hoods



Show your style, our iQ700 angled hood with emotionLight Pro conveys outstanding design combined with powerful performance.

Our stunning angled hood creates a seamless statement in your kitchen with the same materials used in other Siemens appliances such as black glass, the two-zone stainless steel panel, matching chrome lines and consistent controls. Not to mention powerful extraction and customisable ambient lighting.



Your extractor hood now adapts to your taste. Easily choose between many different background light colours – for an extractor hood that matches your style. More colours are available via the Home Connect App.



• Automatic after-running – ensure no smells linger

• Max. noise level: 56dB re 1pW (power level 3 ducted circulation)

Grease and charcoal filter saturation indicators

• Max. extraction rate (normal): 530m3/h

• Max. extraction rate (intensive): 950m3/h

### 10 700 LC91KWW60B Black glass 700 LC91KWW20B White glass

Angled hoods

- touchSlider control
- 3 power levels + 2 intensive setting
- 2 x LED lights
- emotionLight Pro coloured ambient lighting
- Intensive operation revert (6 minutes)



90cm



















### iQ300 LC87KBM60B Black glass

• touchControl

Angled chimney hood

- 3 power levels + 1 intensive setting
- 2 x LED lights
- Automatic intensive revert (6 minutes) • Max. extraction rate (normal): 400m3/h
- Max. extraction rate (intensive): 680m³/h
- Max. noise level: 58dB re 1pW (power level 3 ducted circulation)











80cm

60cm

### IQ300 LC87KHM60B Black glass 10300 LC67KHM60B Black glass

### Angled chimney hoods

- touchControl
- 3 power levels + 1 intensive settings
- 2 x LED lights
- Intensive operation revert (6 minutes)
- Max. extraction rate (normal): 420m³/h
- Max. extraction rate (intensive): 680m3/h
- Max. noise level: 56dB re 1pW (power level 3 ducted circulation) – (LC87KHM60B)

80cm

**Hoods** | Flat chimney hoods Glass chimney hoods | Hoods

# Flat and glass chimney hoods



With modern design, our iQ700 chimney hoods convey an elegant impression of style, quality and intelligent innovation.

design, the flat chimney hood is available in an elegant black or white glass finish. With advanced features such as the climateControl sensor and emotionLight Pro, the remarkable design and powerful performance of this hood allows you to create a highlight in your kitchen.



The innovative climateControl sensor measures vapours and cooking smells while you are cooking and automatically adjusts the extraction rate accordingly. When you're finished, it operates in after-running mode until all the odours are extracted before automatically shutting off.





### 700 LC97FVW60B Black glass 700 LC97FVW20B White glass

Flat chimney hoods

- touchSlider control
- 3 power levels + 2 intensive settings
- 2 x LED lights
- emotionLight Pro coloured ambient lighting
- Intensive operation revert (6 minutes)

• Automatic after-running – ensure no smells linger

• Max. noise level: 57dB re 1pW (power level 3 ducted circulation)

Grease and charcoal filter saturation indicators

• Max. extraction rate (normal): 420m3/h

• Max. extraction rate (intensive): 730m3/h



90cm













For kitchens which demand modern













# 60cm

### 10300 LC67GHM50B Stainless steel

### Straight glass chimney hoods

- touchControl
- Electronic control
- 3 power levels + intensive setting
- 2 x LED lights
- Automatic intensive revert (6 minutes)
- Max. extraction rate (normal): 450m³/h (LC97GHM50B) • Max. extraction rate (intensive): 720m3/h (LC97GHM50B)
- Max noise level: 64dB re 1pW (power level 3 ducted circulation) (LC97GHM50B) Please refer to matrix table for other size specifications













### Curved glass chimney hood

- touchControl
- Electronic control
- 3 power levels + intensive setting
- 2 x LED lights
- Automatic intensive revert (6 minutes)

10300 LC97AFM50B Stainless steel 10300 LC67AFM50B Stainless steel

- Max. extraction rate (normal): 460m³/h (LC97AFM50B)
- Max. extraction rate (intensive): 670m³/h
- Max. noise level: 67dB re 1pW (power level 3 ducted circulation)

Hoods | Box chimney hoods Box chimney hoods | Hoods

# Box chimney hoods



Designed to coordinate with other Siemens appliances, our iQ700 chimney hoods are the ideal solution for many kitchens.

With a sleek design of black glass and stainless steel, the Siemens box chimney hood is also designed to perform. With the efficient, quiet and powerful iQdrive motor, expect high extraction rates for a range of cooking while keeping noise to a minimum.



The motor in Siemens highperformance extractor hoods is unrivalled when it comes to power. The brushless iQdrive motor with patented Siemens technology is able to remove kitchen smells and steam quietly, even when running at the highest extraction rate.



iQ300 LC97BHM50B Stainless steel iQ300 LC77BHM50B Stainless steel 10300 LC67BHM50B Stainless steel

### Box chimney hoods

- touchControl
- Electronic control
- 3 power levels + intensive setting
- 2 x LED lights
- Automatic intensive revert (6 minutes)
- Max. extraction rate (normal): 450m³/h (LC97BHM50B) • Max. extraction rate (intensive) 710m3/h (LC97BHM50B)
- Max. noise level: 65dB re 1pW (power level 3 ducted circulation) (LC97BHM50B) Please refer to matrix table for other size specifications











90cm

75cm

### Box chimney hoods

- Push button control
- 3 power levels
- 2 x LED lights
- Max. extraction rate (normal) 330m³/h (LC94BBC50B)

100 LC94BBC50B Stainless steel 100 LC64BBC50B Stainless steel

• Max. noise level: 64dB re 1pW (power level 3 ducted circulation) – (LC94BBC50B) Please refer to matrix table for other size specifications



### iQ 700 LC98BA572B Stainless steel iQ 700 LC68BA572B Stainless steel

Box chimney hoods

- touchControl experience intuitive control
- 3 power levels + 2 intensive settings for stronger smells
- 3 x LED lights (LC98BA572B)
- Boost function
- Auto intensive revert keeps energy consumption low
- Automatic after-running ensure no smells linger
- Grease filter saturation indicators

• softLight with dimmer function – creates ambiance

(power level 3 ducted circulation) – (LC98BA572B)

• Max. noise level: 55dB re 1pW

• Max. extraction rate (normal): 460m³/h (LC98BA572B)

• Max. extraction rate (intensive): 860m³/h (LC98BA572B)

Please refer to matrix table for other size specifications



90cm

60cm











Hoods | Pyramid chimney hoods Telescopic extractor hoods | Hoods

# Pyramid chimney and telescopic extractor hoods





### iQ300 LC97QFM50B Stainless steel 90cm 10300 LC67QFM50B Stainless steel 60cm

Slim pyramid chimney hoods

• 3 power levels + intensive setting

• Automatic intensive revert (6 minutes)

 touchControl · Electronic control

• 2 x LED lights












































- Pyramid chimney hoods
- Push button 3 power levels
- 2 x LED lights
- Max. extraction rate (normal): 360m³/h
- Max. noise level: 65dB re 1pW (power level 3 ducted circulation)



90cm 60cm









### 10700 LI99SA683B Stainless steel 10700 LI69SA683B Stainless steel

90cm 60cm

### Telescopic extractor hoods

- Electronic control with touchSlider
- 3 power levels + 1 intensive setting for stronger smells
- 2 x LED lights
- · Automatic after-running
- · Automatic intensive revert
- softLight with dimmer function
- Metal grease filter dishwasher safe • Max. extraction rate (normal): 520m³/h (LI99SA683B)
- Max. extraction rate (intensive): 940m³/h (LI99SA683B)
- Max. noise level: 56dB re 1pW (power level 3 ducted circulation) (LI99SA683B) Please refer to matrix table for other size specifications





















### 10500 LI97SA560B Stainless steel 10500 LI67SA560B Stainless steel

10300 LI94MA530B Stainless steel 10300 LI64MA530B Stainless steel 90cm 60cm

### Telescopic extractor hoods

- Electronic control
- 3 power levels + 2 intensive settings
- 2 x LED lights
- Metal grease filter dishwasher safe
- Max. extraction rate (normal): 400m³/h
- Max. extraction rate (intensive): 700m³/h
- Max. noise level: 54dB re 1pW (power level 3 ducted circulation)

### Telescopic extractor hoods

- Electronic control
- 3 power levels + 1 intensive setting
- 2 x LED lights
- Metal grease filter dishwasher safe
- Max. extraction rate (normal): 270m3/h
- Max. extraction rate (intensive): 420m3/h
- Max. noise level: 60dB re 1pW (power level 3 ducted circulation)

# Canopy and integrated extractor hoods





10500 LB78574GB Stainless steel 70cm 10700 LB79585GB Stainless steel iQ500 LB75754GB Stainless steel 52cm Canopy extractor hood Canopy extractor hoods Electronic control · Soft touch buttons Soft touch buttons • 3 power levels + 1 intensive setting – for stronger smells • 3 power levels + 1 intensive setting – for stronger smells • 2 x LED lights • 2 x LED lights • Max. extraction rate (normal): 630m³/h (LB78574GB) • Max. extraction rate (normal): 570m³/h • Max. extraction rate (intensive): 730m³/h (LB78574GB) • Max. extraction rate (intensive): 770m³/h • Max. noise level: 66dB re 1pW (power level 3 ducted circulation) – (LB78574GB) • Max. noise level: 65dB re 1pW (power level 3 ducted circulation) Please refer to matrix table for other size specifications







### 10300 LB75564GB Metallic silver 10300 LB55564GB Stainless steel

iQ 100 LB23364GB Metallic silver

53cm

### Canopy extractor hoods

- Slider switch control
- 3 power levels + 1 intensive setting for stronger smells
- 2 x 20W halogen lights
- Max. extraction rate (normal): 390m³/h (LB75564GB)
- Max. extraction rate (intensive): 640m3/h (LB75564GB)
- Max. noise level: 59dB re 1pW (power level 3 ducted circulation) (LB75564GB) Please refer to matrix table for other size specifications
- Canopy extractor hoods • Rocker switch control
- 2 power levels + 1 intensive setting power boost for stronger smells
- 2 x 40W lights
- Max. extraction rate (normal): 170m3/h
- Max. extraction rate (intensive): 280m3/h
- Max. noise level: 55dB re 1pW (power level 3 ducted circulation)











### 100 LE66MAC00B Metallic silver

100 LE63MAC00B Metallic silver

### Integrated extractor hood

- Push button control
- 3 power levels
- 2 x LED lights • Max. extraction rate (normal): 620m3/h
- Max. noise level: 70dB re 1pW (power level 3 ducted circulation)
- Push button control

Integrated extractor hood

- 3 power levels
- 2 x LED lights
- Max. extraction rate (normal): 360m³/h
- Max. noise level: 62dB re 1pW (power level 3 ducted circulation)

# Cooling. Refrigeration appliances of the future. Today.

# Clever ideas and innovative technologies in trend-setting design.

Siemens built-in cooling appliances provide the ultimate way to store food flexibly and correctly for even more freshness.

From our smallest built-in fridge to our most impressive aCool models, each appliance brings you more freshness and convenience.

Now you're finally able to combine Siemens cooling appliances exactly the way you want – with the right combinations for every individual requirement, taste and kitchen design. Arrange appliances traditionally or side-by-side for even more built-in combinations.



# Fresh, fresher, hyperFresh. Reduce food wastage and take control of what you eat and when with hyperFresh. By providing the ideal environment, the hyperFresh Technology storage system keeps your food fresh for as long as it needs to – and even longer – so you can enjoy your food whatever comes up in your life. Feature shown: hyperFresh Premium control representation

# Experience intelligent cool.

# hyperFresh Plus. Fresh for up to twice as long.


The hyperFresh Plus drawer doesn't just store fruit and vegetables, it provides them with the right conditions to keep them fresh for up to twice as long. Whether it's fruit or vegetables, simply switch the control and the humidity will be adjusted for optimum storage of your food.





## hyperFresh. Enjoy freshness longer.

The hyperFresh drawer offers freshness for longer thanks to the rippled bottom which allows cool air to circulate around your fruit and vegetables easily. As a result, you can see the quality and feel the freshness.





## hyperFresh Premium. Fresh for up to three times longer.

Enjoy fresher food for up to three times longer thanks to hyperFresh Premium. Simply select the kind of fruit and vegetables you want to store with the new control and let the drawer regulate how much humidity your food receives. With the drawer, fish and meat can also be stored at the perfect temperature.



# hyperFresh 0°C drawers. Perfectly fresh for fish and meat: available in all hyperFresh models.

The two hyperFresh 0°C drawers are especially designed for the cooling needs of fish and meat. Keep them fresher in ideal conditions near 0°C for up to two times longer. The separate compartments also avoid unpleasant smells to transfer and both boxes can be easily pulled out with one hand to make room for other foods and drinks, cooling them down quicker and providing refreshing drinks sooner.



# Cooling feature guide.

### Reference key:



Model does have this feature



Model does not have this feature

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model.

\*For individual product energy efficiency ratings please check the icons next to the product specification

### Key functionality

The key functionality shown applies to all cooling products. Please note, each type of cooling product will have their own separate icons. Product types: American Fridge Freezers, aCool, Fridge Freezers, Built-in Fridges, Built-In Freezers, Built-under Fridges and Built-under Freezers.



Energy efficient cooling\* Nearly every cooling appliance in the new Siemens built-in range is up to 20% more energy efficient than its equivalent A-rated appliance. And our energy-saving iQ500 coolConcept fridges, freezers and fridge freezer use an incredibly efficient 40% less energy than an A-rated appliance.



Wi-Fi ready With Wi-Fi enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.



bigBox Big enough for any lifestyle, the bigBox has the capacity for storing whole frozen turkeys, as well as the height to hold dessert glasses upright. Ideal for the holidays and entertaining.



Fridge Freezer split Our range of fridge freezers are available in a variety of sizes with different splits of fridge areas and freezer areas. Alternatively, you can create a bespoke split using separate fridge and freezer units stacked or paired side by side.



Heavy duty softClose The heavy duty softClose hinges dampen the closing of the door even when shut forcefully to keep your kitchen feeling calm. They are thoroughly tested to withstand constant opening and closing.



Height Our built-in cooling appliances are available in a range of heights to fit your kitchen design and available space.



Hinge There are two types of hinges available on our built-in cooling appliances. Either a **fixed hinge** which allows the furniture door to be directly attached to the appliance door, or a **sliding hinge** which is attached to the furniture cabinet.



hyperFresh technology hyperFresh technology is designed to store your food correctly and keep food fresher for longer. hyperFresh Premium keeps food fresh for up to 3 times longer than standard food drawers.



iceDispenser These models are able to dispense ice when needed thanks to a plumbed water connection. Depending on model, ice is available as cubes or crushed



In-door LCD display Precision control at the touch of a button. The in-door LCD display allows the optimum temperature for food to be maintained easily, which in turn keeps your food fresher for longer.



LED Illumination Integrated seamlessly into the side walls of our cooling appliances, LED lighting is very efficient and gives maximum illumination of your fridge and freezer.



multiAirflow System moderates the fridge temperature when new food is added to regulate temperature and humidity levels and eradicate condensation build up.



noFrost Intelligent noFrost technology completely stops the build-up of frost and ice – for life. Not only a time saver, noFrost also ensures that the cavity space within is not compromised by frost build-up.



superCool When activated, superCool ensures that warmer food entering the fridge does not increase the fridge temperature, which can affect other foods



superFreeze When activated, superFreeze makes sure that warmer food added to the freezer doesn't raise the freezer temperature, stopping food partially defrosting.



waterDispenser Models with a waterDispenser are able to dispense water thanks to a plumbed water connection. For fresh and cool drinking water whenever you need it.



Wine rack A wine rack is available on some models which is the perfect place to store wine of all varieties and make the best use of space in your fridge.



5 Year Warranty Available on our range of American style side by side fridge freezers, the 5 year warranty covers parts and labour. Also available on our range of freestanding appliances.



### Other product features

#### activeCooling

Keeping the temperature correct in all areas of the fridge, an interior fan ensures a constant, even distribution of cool air.

### airFresh filte

Neutralises odours in the fridge, ensuring that smells don't transfer between foods. Enjoy a fresh smelling fridge every time you open the door.

### antiFingerprint

Keeps the fridge looking sleek and spotless on the outside, adding to the overall ambience of the kitchen.

### hyperFresh premium

The "dry" zone and "dewpoint" zone within these drawers determine how much humidity food receives. Storing foods at their optimum humidity can help them last up to 3 times as long. This creates less food wastage, meaning fewer trips to the supermarket and cutting down on food bills.

### hyperFresh plus drawer

Be in control with the innovative humidity control, food can last twice as long in the specialist drawer. Not only does this keep in nutrients and minerals that help to create a delicious meal, but as food lasts for longer fewer trips to the supermarket are required – saving you time, effort and money.

### hyperFresh

Keep food fresh in this fruit and vegetable drawer with rippled bottom which allows cool air to circulate around your food easily.

### hyperFresh 0°C drawers

Food such as fish and meat benefit from temperatures close to 0°C, yet this can damage other food stored in the fridge. These boxes store meat and fish at the optimum preservation temperature, whilst allowing other food in the fridge to be chilled at around 4°C.

### easyLift door trays

Ideal storage for large bottles in the fridge door, the shelf can be adjusted to meet the flexible requirements of your lifestyle – even when full.

### easyLift glass shelf

Expect nothing but convenience with easyLift shelves. Even when full, you can raise or lower the shelf by 6cm to make room for taller items – ideal for serving jugs.

### freshProtectbox

Provides the optimum temperature for individual foods, allowing them to stay fresher for longer. Fresh ingredients are critical to delicious meals, but also count for less wastage and fewer trips to the supermarket – saving you, the consumer, time and money.

### **Holiday Mode**

By slightly reducing energy output, holiday mode ensures that food stays cool whilst on holiday or a long business trip; it's smart technology to help reduce energy bills.

### lowFrost

Designed to save time and provide added convenience. It reduces frost build-up, meaning the freezer only needs defrosting once every 3 to 4 years.

### softClose

Adding to the ambience of any kitchen, the softClose door retracts effortlessly and creates minimal noise. In addition to aesthetics, a softClose door ensures that items within the fridge aren't disturbed from a heavy impact, meaning no spills to clean.

### varioShelf

Pull out as a normal shelf, or collapse half the varioShelf under itself and create extra height on the shelf below for bottles. The varioShelf is a convenient feature for when you need to adapt the space in your fridge.

Cooling | aCool built-in cooling appliances aCool built-in cooling appliances | Cooling

# aCool built-in cooling appliances

## Discover our most sophisticated cooling appliance range: aCool.

aCool appliances allow you to create bespoke designs that are both elegant and functional to suit your individual taste. Although they may be behind closed doors our elegant and functional range of built-in cooling appliances will become the talking point of any kitchen.

aCool appliances are designed for the ultimate in refrigeration and freezing for your kitchen. Designed to impress, they feature ample storage space and ensure your kitchen sets the statement it deserves. The modular range means that you have the choice to fit each appliance in different combinations.

The aCool range includes fridges, freezers and a wine cabinet as well as a French-Door fridge freezer in one unit. aCool accessories are sold separately, please speak to your preferred kitchen specialist for installation options and more information.





Telescopic storage shelves.

### Individual flare

For professional quality storage and care of wine, both white and red, choose the elegant and stylish aCool wine cabinet. Great for showcasing large collections, there is room for up to 98 bottles, all beautifully presented and conveniently accessible on telescopic storage shelves, and with two independently adjustable temperature controls the system can accurately maintain temperatures from 5°C to 18°C.



Unique storage solutions.

Sophisticated storage, stunning functions With a digital display that shows the precise temperature and helps navigate easily through the operating menus, a door sensor that sets off a warning alarm if the door is left open for any reason; aCool appliances

from Siemens feature top of the range



In-door ice and water dispensers.

Outstanding design features Seamlessly integrated into the sidewall of the fridge for maximum illumination and no loss of fridge space, the LED lighting is both energy efficient and practical. Available on selected aCool freezers, a conveniently placed in-door ice and water dispenser delivers chilled water, crushed ice and ice cubes at the touch of a





Stunningly, uniquely Siemens, our iQ700 aCool Fridge Freezer conveys an elegant impression of absolute quality and intelligent innovation.

The iQ700 aCool fridge freezer with French door design is expertly designed to offer generous storage space for your fresh food while the pullout drawer freezer is easily accessible for all your frozen food. Speak to your kitchen designer about how Siemens aCool appliances could create a lasting impression in your kitchen.

#### iQ 700 CI36BP01 212cm high

### Built-in fridge freezer

- "French Door" design, left/right hinged door
- Integrated icemaker make as many ice cubes as you
- Noise level: 42dB
- Net fridge capacity: 380 litres
- Net freezer capacity: 146 litres
- Annual energy consumption: 423kWh
- 3 safety-glass shelves and freezer drawer
- multiAirflow cooling
- superCool function
- superFreeze function
- Automatic ice cube maker
- · Heavy duty softClose
- Dimensions (HxWxD): 212.5 x 90.8 x 60.8cm























### iQ700 CI30RP01

### 212cm high

### iQ700 CI24RP01

### 212cm high

### Built-in fridge

- Right hinged door, reversible
- Noise level: 40dB
- Net fridge capacity: 479 litres
- Annual energy consumption: 182kWh
- 4 safety-glass shelves
- · multiAirflow cooling
- superCool function
- · Electronic controls
- · Heavy duty softClose
- Dimensions (HxWxD) 212.5 x 75.6 x 60.8cm

- Right hinged door, reversible
- Noise level: 40dB

• 4 safety-glass shelves

· multiAirflow cooling

- Net fridge capacity: 369 litres
- Annual energy consumption: 169kWh
- · Heavy duty softClose
  - Dimensions (HxWxD):
  - 212.5 x 60.3 x 60.8cm

superCool function

• Electronic controls

technologies.

Cooling | aCool built-in cooling appliances aCool built-in cooling appliances | Cooling

# aCool built-in cooling appliances

























### iQ700 FI24NP31 Built-in freezer

212cm high

- Built-in freezer
- Left hinged door, reversible • Integrated icemaker - make as many ice cubes as you want, whenever you
- Noise level: 41dB
- Net freezer capacity: 223 litres • Annual energy consumption: 320kWh

- 4 metal shelves
- 2 freezer drawers
- Electronic display
- 212.5 x 45.1 x 60.8cm
- Dimensions (HxWxD)
- superFreeze function
- want them • Noise level: 41dB
- Net freezer capacity: 324 litres
- Left hinged door, reversible • Integrated icemaker – make as many ice cubes as you want, whenever you
- - Annual energy consumption: 324kWh
- 4 freezer shelves
- 2 freezer drawers
- superFreeze function
- Electronic display
- Heavy duty softClose
- Dimensions (HxWxD): 212.5 x 60.3 x 60.8cm















212cm high



### 10700 FI24DP32

### 212cm high


### iQ700 FI24DP02

- Integrated icemaker make as many
- want them

- 2 freezer shelves
- superFreeze function
- Electronic display
- 212.5 x 60.3 x 60.8cm



. . . .





0

Professional

quality storage

the system can accurately maintain temperatures from 5°C

red and white wine.

The aCool wine cabinet features two independently adjustable temperature controls, meaning

to 18°C for the ideal storage of

Thanks to the aCool modular range, this wine cabinet can be installed next to a range of other aCool appliances or on its own. The two independently controlled temperature zones and glass door with UV filter to protect wine from UV damage means the wine cabinet is perfectly suited to correctly storing your wine. Telescopic rails and LED lights allow you to showcase your collection in style.



### 10 700 CI24WP02

### 212cm high

### Built-in wine cooler

SIEMENS

- Right hinged door, reversible
- Noise level: 42dB
- Net capacity: 390 litres
- Annual energy consumption: 237kWh
- 14 bottle shelves to fit 98 wine bottles (0.75L)
- Temperature range from 5-18°C
- Heavy duty softClose
- Dimensions (HxWxD): 212.5 x 60.3 x 60.8cm

- Integrated icemaker make as many ice cubes as you want, whenever you want them
- Noise level: 41dB
- Net freezer capacity: 306 litres
- Annual energy consumption: 347kWh
- 2 freezer shelves
- 2 freezer drawers superFreeze function
- Electronic display
- Dimensions (HxWxD): 212.5 x 60.3 x 60.8cm
- · Right hinged door, not reversible
- ice cubes as you want, whenever you
- Noise level: 41dB • Net freezer capacity: 306 litres
- Annual energy consumption: 347kWh
- 2 freezer drawers
- Dimensions (HxWxD):

Cooling | American fridge freezers American fridge freezers | Cooling

# American fridge freezers

### hyperFresh plus

Be in control with the innovative humidity control, food can last twice as long in the specialist drawer. Not only does this keep in nutrients and minerals that help to create a delicious meal, but as food lasts for longer fewer trips to the supermarket are required – saving you time, effort and money.

To see which products feature hyperFresh Plus, please check individual product specifications.



### Our stylish iQ700 American fridge freezer with innovative indoor electronics and intelligent noFrost technology.

Experience a truly stunning finish to this black glass American-style fridge freezer with touchControl electronic controls that seamlessly blend into the front panel. With beautiful design also comes more space for your fresh and frozen food finished with bright LED illumination.

















### 700 KA92NLB35G Black

### American fridge freezer

- Noise level: 43dB
- Net fridge and freezer capacity: 592 litres
- Annual energy consumption: 385kWh
- 4 safety-glass shelves and 2 freezer shelves
- superCool function • superFreeze function

- hyperFresh plus adjustable humidity keeps fruit and vegetables fresh up to 2 x longer
- bigBox capacity for storing whole frozen turkeys, as well as the height to hold dessert glasses upright
- iceTwister for ice cubes on demand
- Dimensions (HxWxD): 175.6 x 91.2 x 73.2cm



















### 10700 KA92DAI20G Stainless steel antiFingerprint

### American fridge freezer

- Noise level: 43dB
- Net fridge and freezer capacity: 541 litres
- Annual energy consumption: 443kWh 4 safety-glass shelves and 2 freezer shelves
   superCool function
- superFreeze function

- hyperFresh plus adjustable humidity keeps fruit and vegetables fresh
- bigBox capacity for storing whole frozen turkeys, as well as the height to hold dessert glasses upright
- Dimensions (HxWxD): 175.6 x 91.2 x 73.2cm















### 10700 KA90DVI20G Stainless steel antiFingerprint

### American fridge freezer

- Noise level: 43dB
- Net fridge and freezer capacity: 533 litres
- Annual energy consumption: 436kWh
- 4 safety-glass shelves and 4 freezer shelves
- superCool function
- superFreeze function

- hyperFresh plus adjustable humidity keeps fruit and vegetables fresh
- Dimensions (HxWxD): 177 x 91 x 72cm

Cooling | American fridge freezers Cooling

# American fridge freezers

















### American fridge freezer

- Noise level: 43dB
- Net fridge and freezer capacity: 523 litres
- Annual energy consumption: 432kWh
- 4 safety-glass shelves and 2 freezer shelves
   superCool function
- superFreeze function

- 4L water tank built-in to shelf manual fill, no plumbing required
- Dimensions (HxWxD): 177 x 91 x 72cm























### American fridge freezer

- Noise level: 44dB
- Net fridge and freezer capacity: 573 litres
- Annual energy consumption: 475kWh
- 4 safety-glass shelves and 4 freezer shelves
- superCool function
- superFreeze function
- Dimensions (HxWxD): 177 x 91 x 72cm















## Choosing the right hinge: fixed and sliding.

Siemens built-in cooling appliances are available with specific types of hinges that either aid the installation and design of your kitchen or can be matched for replacement appliances.

A fixed hinge means that the furniture door is mounted to the appliance door.

Advantages of a fixed hinge mean that Siemens can offer softClosing doors that automatically close at an angle of approx 15°-20° so you don't accidentally leave the door open. The installation also offers better access to the appliance interior and due to the optimised width, higher energy efficiency with competitive volume.



A sliding hinge means that the furniture door is mounted at the kitchen cabinet body as well as a sliding rail to connect the fridge and furniture door.





Built-in fridge freezers | Cooling Cooling

# Built-in fridge freezers



### With noFrost technology you'll never have the job of defrosting the freezer again.



You never need to defrost the freezer again Who has time to defrost the freezer? Those with a Siemens noFrost freezer do, because there simply is no need to. Using an air circulation system to remove humidity and stop frost and ice building up on the freezer walls and packaging your freezer will look after itself. No longer will you have to run-down your freezer to defrost and remove the ice build-up. Hassle free, you can enjoy fresher food, no more soggy packaging and a frost free freezer for life.



lowFrost. Because life's too short For those models that come with lowFrost, life is still made easier. lowFrost reduces the build-up of frost by up to 50%, meaning that you don't need to defrost the freezer as often, only once every 3 to 4 years. Designed to save you time and provide added convenience, you can spend your time on the things you enjoy, not defrosting your freezer.





### Our stylish iQ500 fridge freezer will prove practical for your kitchen with its stylish looks and innovative features.

With noFrost technology, LED illumination and a bigBox for extra space our practical yet refined built-in fridge freezer blends cutting edge technology with timeless design.













### Q 500 KI34NP60GB Black

### 177cm high

Fixed hinge built-in fridge freezer

- Right hinged door, reversible
- Noise level: 39dB
- Net fridge capacity: 186 litres
- Net freezer capacity: 72 litres
- Annual energy consumption: 238kWh
- 3 safety-glass shelves, 2 additional shelves and 3 freezer drawers
- softClose door provides smooth effortless closure
- superCool function • superFreeze function
- Dimensions (HxWxD): 177.2 x 55.6 x 54.5cm

















### 10500 KI85NAD30G

### 177cm high

### 10500 KI87SAF30G

### 177cm high

### Fixed hinge built-in fridge freezer

- Right hinged door, reversible
- Net fridge capacity: 154 litres
- Net freezer capacity: 92 litres
- 4 safety-glass shelves and
- Annual energy consumption: 232kWh
- hyperFresh Plus • freshSense function

effortless closure

superCool function

• superFreeze function

Dimensions (HxWxD): 177.2 x 55.8 x 54.5cm

• softClose door – provides smooth

- Right hinged door, reversible
- Noise level: 36dB
- Net fridge capacity: 209 litres

Fixed hinge built-in fridge freezer

- Net freezer capacity: 61 litres
- Annual energy consumption: 255kWh
- 5 safety-glass shelves and
- freshSense function • lowFrost function

• superCool function

hyperFresh plus

• superFreeze function

• Dimensions (HxWxD): 177.2 x 55.8 x 54.5cm Cooling | Built-in fridge freezers Built-in fridge freezers | Cooling

# Built-in fridge freezers













177cm high

### 10500 KI86SAF30G

### Fixed hinge built-in fridge freezer

### 177cm high

- Fixed hinge built-in fridge freezer
- Right hinged door, reversible • Noise level: 36dB
- Net fridge capacity: 191 litres
- Net freezer capacity: 74 litres
- Annual energy consumption: 218kWh
- 5 safety-glass shelves and 3 freezer drawers
- superCool function • superFreeze function
- hyperFresh plus
- freshSense function
- lowFrost function • Dimensions (HxWxD):
- Noise level: 38dB

177cm high

• Right hinged door, reversible • Net fridge capacity: 191 litres

10300 KI86VVF30G

- Net freezer capacity: 76 litres
- Annual energy consumption: 231kWh
- 177.2 x 55.8 x 54.5cm
- 4 safety-glass shelves and 3 freezer drawers
- superFreeze function
- lowFrost function
- Dimensions (HxWxD):
- 177.2 x 54.1 x 54.5cm







177cm high

### 10300 KI87VVS30G Sliding hinge built-in fridge freezer

- Right hinged door, reversible
- Noise level: 38dB • Net fridge capacity: 209 litres
- Net freezer capacity: 63 litres
- Annual energy consumption: 227kWh
- 5 safety-glass shelves and
- 2 freezer drawers

### Fixed hinge built-in fridge freezer

177cm high

- superFreeze function
- freshBox
- lowFrost function • Dimensions (HxWxD):
- 177.2 x 54.1 x 54.5cm

10300 KI85VVF30G

- Right hinged door, reversible
- Noise level: 38dB
- Net fridge capacity: 157 litres
- Net freezer capacity: 102 litres
- Annual energy consumption: 239kWh
- freshBox • lowFrost function
- Dimensions (HxWxD):

• superFreeze function

- 177.2 x 54.1 x 54.5cm
- 4 safety-glass shelves and 4 freezer drawers





177cm high

#### 10300 KI86NVF30G 10300 KI87VVF30G 177cm high

Fixed hinge built-in fridge freezer

- Right hinged door, reversible Noise level: 39dB
- Net fridge capacity: 188 litres

3 freezer drawers

- Net freezer capacity: 67 litres
- Annual energy consumption: 222kWh
- 4 safety-glass shelves and
- Dimensions (HxWxD):
  - 177.2 x 54.1 x 54.5cm
- superFreeze function · Right hinged door, reversible
  - Noise level: 38dB
    - Net fridge capacity: 209 litres
      - Net freezer capacity: 63 litres

• 5 safety-glass shelves and 2 freezer drawers

Fixed hinge built-in fridge freezer

- Annual energy consumption: 227kWh
- superFreeze function freshBox
  - lowFrost function

    - Dimensions (HxWxD): 177.2 x 54.1 x 54.5cm
    - - - 3 freezer drawers

Noise level: 40dB

 Net freezer capacity: 59 litres • 5 safety-glass shelves and

10300 KI38VX22GB

• Right hinged door, reversible

• Net fridge capacity: 217 litres

Sliding hinge built-in fridge freezer

- Annual energy consumption: 275kWh

freshBox

· Manual defrost • Dimensions (HxWxD): 177.2 x 54.1 x 54.5cm **Cooling |** Built-in single door fridges and freezers Built-in single door fridges and freezers | Cooling

# Built-in single door fridges and freezers















177cm high

177.2

177cm high



177cm high



### 10700 KI42FP60GB

#### 10500 KI81RAD30 177cm high

### 177cm high

- Fixed softClose hinge built-in fridge
- Right hinged door, reversible
- Noise level: 39dB
- Net fridge capacity: 302 litres Annual energy consumption: 133kWh
- 3 safety-glass shelves, 4 additional shelves and
- 3 freezer drawers
- hyperFresh Premium • easyLift
- superCool function
- softClose door
- 177.2 x 55.6 x 54.5cm
- Dimensions (HxWxD):
- Fixed softClose hinge built-in fridge
- Right hinged door, reversible
- Noise level: 37dB
- Net fridge capacity: 319 litres
- Annual energy consumption: 116kWh
- 7 safety-glass shelves
- hyperFresh plus
  - - easyLift
    - superCool function
    - softClose door
    - Dimensions (HxWxD): 177.2 x 55.8 x 54.5cm



- Sliding hinge built-in fridge • Right hinged door, reversible
- Noise level: 37dB
- Net fridge capacity: 319 litres
- Annual energy consumption: 116kWh • 7 safety-glass shelves
- freshBox • superCool function
- · Dimensions (HxWxD): 177.2 x 54.1 x 54.5cm

### Sliding hinge built-in fridge

10300 KI82LVS30G

- Right hinged door, reversible
- Noise level: 39dB
- Net fridge capacity: 252 litres
- Annual energy consumption: 209kWh
- 5 safety-glass shelves
- freshBox
- Freezer compartment: 34 litre capacity
- 177.2 x 54.1 x 54.5cm











### 177cm high

• Right hinged door, reversible

7 safety-glass shelves

Fixed hinge built-in fridge

- Noise level: 37dB easyLift
- Net fridge capacity: 319 litres
- Annual energy consumption: 116kWh
- hyperFresh plus
- superCool function
- Dimensions (HxWxD): 177.2 x 55.8 x 54.5cm
- 10500 KI82LAF30 Fixed hinge built-in fridge
- · Right hinged door, reversible
- Noise level: 36dB
- Net fridge capacity: 252 litres • Annual energy consumption: 209kWh
- 5 safety-glass shelves

177cm high

- hyperFresh plus • superCool function
- Freezer compartment: 34 litre capacity
- Dimensions (HxWxD):
- 177.2 x 55.8 x 54.5cm

### 10700 GI38NA55GB

Fixed softClose hinge built-in freezer

- Left hinged door, reversible
- Noise level: 42dB
- Net freezer capacity: 210 litres
- Annual energy consumption: 308kWh
- 2 freezer shelves
- 5 freezer drawers • softClose door
- Dimensions (HxWxD):
- 177.2 x 55.6 x 54.5cm

### Fixed hinge built-in freezer

- Left hinged door, reversible
- Noise level: 36dB

10500 GI81NAE30G

- Net freezer capacity: 211 litres
- Annual energy consumption: 243kWh
- 5 freezer drawers









177cm high

# Built-in single door fridges and freezers

### Create a combination to fit your lifestyle.

Thanks to a wide range of full-size fridges and freezers in a choice of sizes, it's possible to create combinations that fit your lifestyle.

### Siemens modularFit appliances are freely combinable

You need a kitchen that matches your lifestyle. That's why you're able to combine the cooling and freezing appliances exactly the way you want – with the right combinations for every individual requirement and taste. But the flexibility doesn't stop with the way you can arrange your kitchen. With unique and innovative cooling technologies the appliances even enrich your everyday life.

The range of cooling and freezing appliances convince with their innovative combinability and integrated extras

Siemens modularFit appliances come with a feeling of flexibility and exciting innovations like hyperFresh and noFrost technology. The simple installation as well as an energy efficiency category up to A++ round out the overall picture and guarantee a maximum of flexibility and freshness.



Whether it's on top or next to each other: thanks to the anti-condensation technology you are able to match cooling and freezing appliances however you like. The innovative technology prevents build-up of moisture between the appliances. Adapt your cooling experience to your kitchen and your life – with modularFit.

#### Over and Under examples



Note: Door hinges are reversible

### An integrated kitchen without limitation

Choose a customised side-by-side installation or create a bespoke over and under installation that gives you the space you need and the features you want. Speak to your chosen kitchen designer for inspiration and available options.

### Side-by-side installation combinations

Height	Freezer	Matching Fridge Options				
88cm	GI21VAF30G	KI21RVF30G	KI22LVS30G	KI21RAF30G		
122cm	GI41NAE30G	KI41RVS30G	KI41RAF30G	KI41RAD30		
177cm	GI81NAE30G	KI81RVS30G	KI82LVS30G	KI81RAF30G		
177cm	GI38NA55GB	KI81RAD30	KI42FP60GB	KI82LAF30		





















### 10500 KI51RAF30G

#### 10700 GI25NP60 140cm high

### 140cm high

### Fixed hinge built-in fridge

- Right hinged door, reversible
- Noise level: 33dB
- Net fridge capacity: 247 litres Annual energy consumption: 109kWh
- 6 safety-glass shelves
- hyperFresh plus
- superCool function
- . Dimensions (HxWxD): 139.7 x 55.8 x 54.5cm

### · Left hinged door, reversible

- Noise level: 41dB
- Net freezer capacity: 156 litres

Fixed softClose hinge built-in freezer

- Annual energy consumption: 208kWh 4 freezer drawers and 1 freezer flan
- softClose door
- Dimensions (HxWxD):
- 139.7 x 55.6 x 54.5cm















### 122cm high

### 10500 KI41RAF30G

### 122cm high

### Fixed softClose hinge built-in fridge

- Right hinged door, reversible
- Noise level: 33dB • Net fridge capacity: 211 litres
- Annual energy consumption: 105kWh
- hyperFresh plus
- Dimensions (HxWxD) 122.1 x 55.8 x 54.5cm
- 6 safety-glass shelves

- Fixed hinge built-in fridge
- Right hinged door, reversible
- Noise level: 33dB
- Net fridge capacity: 211 litres
- Annual energy consumption: 105kWh
- 6 safety-glass shelves
- hyperFresh plus Dimensions (HxWxD):
- 122.1 x 55.8 x 54.5cm

# Built-in and built-under single door fridges and freezers















122cm high	GI41NAE30G 122cm high	io 300 GI31NAE30G 102cm high
Sliding hinge built-in fridge	Fixed hinge built-in freezer	Fixed hinge built-in freezer
Right hinged door, reversible Noise level: 37dB Net fridge capacity: 211 litres Annual energy consumption: 105kWh freshBox Gafety-glass shelves superCool function Dimensions (HxWxD): 122.1 x 54.1 x 54.5cm	Left hinged door, reversible Noise level: 36dB Net freezer capacity: 127 litres Annual energy consumption: 188kWh freezer drawers and 1 freezer flap Dimensions (HxWxD): 122.1 x 55.8 x 54.5cm	Left hinged door, reversible     Noise level: 37dB     Net fridge capacity: 97 litres     Annual energy consumption: 168kWh     3 freezer drawers and 1 freezer flap     Dimensions (HxWxD):     102.1 x 55.8 x 54.5cm













		District Control of the Control of t		Trans.	
io500 KI21RAF30G	38cm high	io 300 KI21RVF30G	88cm high	iQ300 KI22LVS30G	88cm high
Fixed hinge built-in fridge		Fixed hinge built-in fridge		Sliding hinge built-in fridge	
Right hinged door, reversible Noise level: 33dB Net fridge capacity: 144 litres Annual energy consumption: 97kWh stafety-glass shelves hyperFresh plus superCool function Dimensions (HxWxD): 87.4 x 55.8 x 54.5cm		<ul> <li>Right hinged door, reversible</li> <li>Noise level: 36dB</li> <li>Net fridge capacity: 144 litres</li> <li>Annual energy consumption: 97kWh</li> <li>4 safety-glass shelves</li> <li>superCool function</li> <li>Dimensions (HxWxD): 87.4 x 54.1 x 54.5cm</li> </ul>		Right hinged door, reversible Noise level: 38dB Net fridge capacity: 109 litres Annual energy consumption: 148kWh 3 safety-glass shelves Ice box superCool function Dimensions (HxWxD): 87.4 x 54.1 x 54.5cm	



1Q500 GI21VAF30G	88cm high	iQ500 GI11VAF30	72cm high
Fixed hinge built-in freezer		Fixed hinge built-in freezer	
Right hinged door, reversible Noise level: 36dB Net freezer capacity: 97 litres Annual energy consumption: 157 kWh freezer drawers Dimensions (HxWxD): 87.4 x 55.8 x 54.5cm	1	Right hinged door, reversible Noise level: 36dB Net fridge capacity: 72 litres Annual energy consumption: 144kWh 3 freezer drawers lowFrost function Manual defrost feature Dimensions (HxWxD): 71.2 x 55.8 x 54.5cm	



KU15LA60GB 82cm high	iQ300 KU15RA51GB 82cr	m high 10300 GU15DA50GB 82cm high
Fixed hinge built-under fridge	Fixed hinge built-under fridge	Fixed hinge built-under freezer
Right hinged door, reversible Noise level: 38dB Net fridge capacity: 108 litres Annual energy consumption: 140kWh safety-glass shelves freshBox Ice box Dimensions (HxWxD): 82 x 59.8 x 54.8cm	Right hinged door, reversible Noise level: 38dB Net fridge capacity: 137 litres Annual energy consumption: 118kWh 3 safety-glass shelves freshBox Dimensions (HxWxD): 82 x 58.8 x 54.8cm	<ul> <li>Right hinged door, reversible</li> <li>Noise level: 38dB</li> <li>Net fridge capacity: 98 litres</li> <li>Annual energy consumption: 184kWh</li> <li>3 freezer drawers</li> <li>Dimensions (HxWxD): 82 x 59.8 x 54.8cm</li> </ul>

Dishwashers.
Innovative features
for inspiring results.

Siemens dishwashers feature modern design and innovative ideas that make life easier.

Be fascinated by maximum flexibility thanks to practical innovations such as varioSpeed which washes your dishes on selected programmes up to 50% faster and Zeolith® drying technology that transforms humidity into heating energy for gentle and effective drying conditions.

Our dishwashers include height-adjustable baskets and foldable racks, stylish innovations such as door openAssist and timeLight floor projection, all working together to provide you with the perfect balance between modern design and innovative technology. Whether you're serving dinner for family or hosting a party for friends, Siemens dishwashers ensure that you'll have sparkling clean dishes and glasses quickly.





# Welcome to a new era of dishwashing with brilliantShine.

# Innovative features for inspiring results.

That's what the new brilliantShine system with Zeolith® drying is made for: creating the perfect conditions to start every day with a highlight, and sparkling glasses that you can be proud of.

Experience three perfectly synchronised, innovative features in just one washing cycle – for a brilliant shine directly out of your dishwasher. Refine your everyday life with limitless sparkling highlights.\*

There are three factors in dishwashing that influence the shine of your glassware: temperature, cycle time, and the use of detergent.

The new brilliantShine system offers three intelligent solutions that take care of these factors:

- Zeolith® drying uses a natural mineral to produce ideal heat conditions
- The Shine&Dry option swills all residues of detergent with extra rinsing water
- The Glass 40°C programme reduces the cycle time in order to be especially gentle for delicate glasses

\*Depending on the detergent, the properties of the glassware, and the way it is placed in the dishwasher, the cleaning and drying results may vary slightly.



## Home Connect.

Through the Home Connect app the Amazon Dash Replenishment Service enables connected Siemens devices to automatically re-order everyday products directly from Amazon when they start to run low so you can never be short of items like dishwasher tablets.





Home Connect is available on selected models only. See the Wi-Fi icon for products with this feature.

Model shown: **SN678D06TG** fully integrated dishwasher with Home Connect



### Key functionality



Energy efficient class\* All Siemens built-in dishwashers are rated at least A+ for energy efficiency.



emotionLight The emotionLight uses LED lights to create a cool blue glow emanating from inside your dishwasher.



openAssist Open fully integrated dishwashers by lightly pushing the top of the door. Ideal for handless kitchens, an electronic child lock can also be activated to make it a double push to open.



varioDrawer By adding a third shelf for cutlery, varioDrawer removes the need for a cutlery basket and creates more space. Also available in varioDrawer Pro for added flexibility.

### Reference key:



Model does have this feature



Model does not have this feature



Wi-Fi ready With Wi-Fi-enabled Siemens home appliances and Home Connect, you can manage your home appliances from wherever you are and discover more possibilities to make your life easier.



**infoLight** Projects a beam of light onto the floor to show the dishwasher is running.



timeLight Useable on any surface of any colour, timeLight projects the remaining time and stage of the dishwasher cycle on to the floor.



Zeolith® is a naturally occurring mineral that converts moisture to heat. This heat produced naturally by the Zeolith® is used for the drying cycle. No additional energy is therefore required to heat up the contents of the dishwasher for the drying process.

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model.

\*For individual product energy efficiency ratings please check the icons next to the product specification

### Other product features

### dosageAssist

Quickly and evenly dissolves dishwasher tablets throughout the entire machine, leaving no mess to clean at the end of the cycle.

### duoPower (Slimline only)

Benefitting from 2 spray arms under the top basket as opposed to just one, duoPower ensures that dishes in all areas of the dishwasher receive the best possible clean.

### extraDry

Designed to make sure that plasticware comes out of the dishwasher bone dry.

### hydroDry

The hydroDry system extracts moisture from the air in the machine efficiently, leaving the contents of the dishwasher to dry hygienically without the need for external air.

### hydroSafe

Cuts off the water supply from the tap if a leak is detected, even if the dishwasher isn't in use. Precision protection for your kitchen.

### hydroSensor

Makes sure that the optimum temperature is used depending on how dirty the dishes are, meaning that dishes are perfectly clean the first time round.

### Hygiene Plus

Great for cleaning chopping boards, food containers and utensils, the hygiene option kills bacteria and germs. Providing a simple solution to the upkeep of your family's health, the final rinse heats up to 70°C regardless of the cycle you choose.\*

### varioFlex Pro basket

Creating extra space for pots and pans by moving flexible areas to suit different loads, the inside of the dishwasher is constantly adaptable.

\*Not on delicate programme.

#### varioHinge

The varioHinge is the optimal solution for installing your dishwasher as the fully integrated front panel moves up slightly when the machine is opened. This removes the need to have large gaps when dishwashers are installed at a high level, and suitable for lower plinth heights.

### varioSpeed Plus

Use the varioSpeed Plus button to run the dishwasher significantly faster without compromising on wash quality.

### intensiveZone

Delicate glasses and burnt cooking pans can be put into the same wash so there is no need to separate washes in to different loads.

### loadSensor

By monitoring that the optimum amount of water is flowing through the dishwasher throughout the cycle, loadSensor helps to ensure that dishes are cleaned thoroughly.

### Silence Programme

This programme is an adapted Eco  $50^{\circ}$ C programme that achieves a noise reduction of 2 dB by decreasing the spray pressure and extending the run time.

### ackMatic™

Conveniently allows you to adjust the top basket between 3 different heights to create more or less space, even when the dishwasher is loaded.

### Shine&Dry

Straight from dishwasher to table, Shine&Dry delivers streak-free shining glasses.

### varioDrawer Pro

By adding a third shelf for cutlery, varioDrawer Pro removes the need for a cutlery basket and creates more space. This version of the varioDrawer also has flexible areas to increase space for items such as espresso cups.

# Fully integrated dishwashers

### Energy efficiency meets cutting edge design.



Using advanced drying technologies, Siemens dishwashers keep energy consumption to a minimum. Zeolith®, a form of naturally occurring mineral, has the astonishing ability to absorb moisture and convert it to heat.

What does this mean for you? The heat produced naturally by the Zeolith® is used for the drying cycle. No additional energy is therefore required to heat up the contents of your dishwasher for the drying process (as with a standard drying system). This results in sparkling results, with less energy usage.

The Zeolith® mineral is stored in the depths of the dishwasher; this regenerates itself and keeps working for the lifetime of the machine meaning you never have to replace it! Combine this with the economy 50°C programme to get brilliant results with minimal energy.

### Drying phase

Zeolith® absorbs moisture and converts it to heat energy.



### Cleaning phase

As the mineral is heated during the cleaning cycle, it is recharged and ready to absorb moisture once more.











600mm

### 10700 SN678D06TG Black

- 14 place settings
- Noise level: 41dB (A) re 1pW

Fully integrated dishwasher

- Water consumption using Eco 50: 9.5 litres
- brilliantShine system
- 8 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Silence 50°C, Short 60°C, Glass 40°C, Quick 45°C, Pre-Rinse
- 6 special options: Machine Care, Shine&Dry, Hygiene Plus, intensiveZone,
- remote start, varioSpeed Plus · varioFlex Pro basket system
- varioDrawer Pro
- dosageAssist detergent dispense

### • Zeolith® - advanced drying technology

### Fully integrated dishwasher

- 14 place settings
- Noise level: 42dB (A) re 1pW
- Water consumption using Eco 50: 9.5 litres

10700 SN678D01TG Black

- brilliantShine system
- 8 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Silence 50°C, Short 60°C, Glass 40°C, Quick Wash 45°C, Pre-Rinse
- 5 special options: Machine Care, Shine&Dry, Hygiene Plus, intensiveZone, varioSpeed Plus
- varioFlex Pro basket system
- varioDrawer Pro
- Zeolith® advanced drying technology
- dosageAssist detergent dispenser

### A modern handleless kitchen with appliances that fit seamlessly in their surroundings.



With door openAssist you can open fully integrated dishwashers by simply touching the front of the unit, making loading and unloading easy. This removes the need for a handle and is the ideal choice for designer kitchens.







### 500 SN658D00MG Black

600mm

### Fully integrated dishwasher

- 14 place settings
- Noise level: 44dB (A) re 1pW
- Water consumption using Eco 50: 9.5 litres
- 8 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Silence 50°C, Short 60°C, Glass 40°C, Quick Wash 45°C, Pre-Rinse
- 5 special options: Machine Care, Shine&Dry, Hygiene Plus, intensiveZone,
- varioFlex baskets with coloured touch points
- Zeolith® advanced drying technology
- · dosageAssist detergent dispenser













#### 10500 SN658D01MG Black iQ500 SN658D02MG Black 600mm

### Fully integrated dishwasher

- 13 place settings
- Noise level: 44dB (A) re 1pW
- Water consumption using Eco 50: 6.5 litres
- 8 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Silence 50°C, Glass 40°C, 1 Hour 65°C, Quick Wash 45°C, Pre-Rinse
- 5 special options: Machine Care, extraDry, Hygiene Plus, intensiveZone, varioSpeed Plus
- varioFlex baskets with coloured touch points
- hydroDry hygienic and efficient drying
- dosageAssist detergent dispenser

### Fully integrated dishwasher

- 14 place settings
- Noise level: 39dB (A) re 1pW
- Water consumption using Eco 50: 9.5 litres
- 8 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Silence 50°C,
- Glass 40°C, 1 Hour 65°C, Quick Wash 45°C, Pre-Rinse
- 5 special options: Machine Care, extraDry, Hygiene Plus, intensiveZone, varioSpeed Plus
- varioFlex baskets with coloured touch points
- hydroDry hygienic and efficient drying
- dosageAssist detergent dispenser

# Fully and semi-integrated dishwashers









### 10300 SX736X03ME Stainless steel

### 600mm

### Fully integrated extra height 86.5cm dishwasher

- 14 place settings
- Noise level: 44dB (A) re 1pW
- Water consumption using Eco 50: 9.5 litres
- 6 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Glass 40°C, 1 Hour 65°C, Pre-Rinse
- 4 special options: Machine Care, extraDry, intensiveZone, varioSpeed Plus
- varioFlex basket system
- hydroDry hygienic and efficient drying
- · dosageAssist detergent dispenser
- varioHinge integrated front panel moves up when opened

### Fully integrated dishwasher

- 14 place settings
- Noise level: 44dB (A) re 1pW
- Water consumption using Eco 50: 9.5 litres

iQ300 SN736X03ME Stainless steel

- 6 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C,
- Glass 40°C, 1 Hour 65°C, Pre-Rinse
- 4 special options: Machine Care, extraDry, intensiveZone, varioSpeed Plus
- varioFlex basket system
- hydroDry hygienic and efficient drying
- dosageAssist detergent dispenser
- varioHinge integrated front panel moves up when opened







600mm

### 10300 SN636X00KG Black

### iQ700 SN578S36TE Stainless steel

### Fully integrated dishwasher

- 13 place settings
- Noise level: 46 dB (A) re 1pW
- Water consumption using Eco 50: 9.5 litres
- 6 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Glass 40°C, 1 Hour 65°C, Pre-Rinse
- 3 special options: Machine Care, extraDry, varioSpeed Plus
- · varioFlex basket system
- · hydroDry hygienic and efficient drying • dosageAssist detergent dispenser

- 13 place settings
- Noise level: 42dB (A) re 1pW
- Water consumption using Eco 50: 7.5 litres
- 8 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Silence 50°C,
- Short 60°C, Glass 40°C, Quick Wash 45°C, Pre-Rinse
- 5 special options: Shine&Dry, Hygiene Plus, intensiveZone, remote start, varioSpeed Plus
- varioFlex Pro basket system

Semi-integrated dishwasher

- varioDrawer Pro
- Zeolith® advanced drying technology
- dosageAssist detergent dispenser

### Added extras designed to make life easier.

With cutting-edge technology, Siemens dishwashers give you more than just clean dishes.

### Machine Care with Siemens dishwashers

For excellent results when washing and drying, it's important to look after your dishwasher correctly. The Siemens Machine Care programme runs at a high temperature to leave your dishwasher sparkling clean and free from grease and limescale deposits that could build up with lower temperature washes. On certain models the dishwasher will notify you when a cleaning cycle is recommended to be run. There is also functionality that highlights when to replenish salt or rinse aid to maintain performance.

Siemens built-in dishwashers with varioHinge ensure your kitchen design can be completely flexible with the installation of your dishwasher. Perfect for cabinet doors in handleless kitchens, or designs with low baseboards and longer cabinet panels, the varioHinge allows the cabinet door to be pushed upwards when opened to avoid the door catching. The varioHinge reduces the bottom gap between cabinet doors too for a seamless finish to your kitchen.

#### Cool glow of emotionLight

Siemens dishwashers feature an internal blue emotionLight that has the wow-factor. Creating a relaxed ambiance, the emotionLight uses LED lights to reflect off your brilliantly-cleaned glasses and create a cool blue glow emanating from inside your dishwasher when you open the door, and switching off again when you close it.

### 10 year anti-rust warranty

Due to advanced materials and manufacturing technologies, in addition to our standard appliance warranty, we provide a free warranty against rusting-through of the dishwasher's inner cavity.

### **TFT Display**


The clearText TFT Display integrated into the top control panel of our iQ700 dishwashers matches the seamless design of our handleless openAssist models. The clearText TFT Display shows all selected programme information at a glance. What's more, the information button allows you to quickly discover available programmes and options with ease, as well as see the exact start, end and running times.



### Slimline dishwashers









### IQ500 SR656X01TE Stainless steel

SR636D00MG Black

### Fully integrated slimline dishwasher

- 10 place settings
- Noise level: 43dB (A) re 1pW
- Water consumption using Eco 50°C: 9.5 litres
- 6 programmes: Intensive 70°C, Auto 40-65°C, Eco 50°C, Silence 50°C, Short 60°C, Glass 40°C
- 4 special options: Machine Care, Shine&Dry, varioSpeed Plus, intensiveZone
- · varioFlex Pro basket system
- varioDrawer Pro
- Zeolith® advanced drying technology
- · dosageAssist detergent dispenser

### Fully integrated slimline dishwasher

- 10 place settings
- Noise level: 46dB (A) re 1pW
- Water consumption using Eco 50°C: 9.5 litres
- 6 programmes: Intensive 70°C, Auto 45-65°C, Eco 50°C,
- Silence 50°C, Glass 40°C, 1 hour 65°C • 4 special options: Machine Care, varioSpeed Plus, intensiveZone, HygienePlus
- varioFlex basket system
- · hydroDry hygienic and efficient drying
- dosageAssist detergent dispenser

# Home Laundry. High-performance Washing machines.

Siemens have created a built-in laundry range that is cleverly designed and quietly energy efficient, developed to make laundry easier and less of a chore.

Our machines take full advantage of the latest technology and innovation all behind closed doors. Cleverly designed and quietly efficient our built-in washing machines and washer dryers produce beautifully clean clothes without ruining the beautifully clean lines of your living space.



# Laundry feature guide.

### Reference key:



Model does have this feature



Model does not have this feature

The features included in this feature guide are an overview only. Please ensure that you check the product detail for the exact features of each model.

\*For individual product energy efficiency ratings please check the icons next to the product specification

### Key functionality – Washing machines



Energy efficient washing machines\* All Siemens washing machines automatically adapt the wash time and energy consumption to the amount of laundry in the machine.



Drum clean An automatic alert after 20 washes to run the Drum Clean programme on a 90°C or 60°C wash keeps the appliance clean and odour free.



hydroSafe Guarantees 100% lifelong protection against water damage. If a leak does occur, hydroSafe immediately cuts off the water supply from the tap.



rapid15 Washes, rinses and spins lightly soiled clothing in just 15 minutes, designed for those with hectic lives this wash cycle will clean clothes when you're in a hurry.



Capacity The large 8kg drum capacity is the perfect size to hold more laundry and reduce the number of loads you have to wash.



Extremely Quiet Thanks to the brushless iQdrive motor and antiVibration side panels, Siemens built-in washing machines are particularly quiet in their class.



iQdrive with 10 year motor warranty The iQdrive motor is covered with a 10 year motor warranty for additional peace of mind and incredible performance.



timeLight Projects the remaining cycle time and programme status onto the floor to keep you informed at a glance.

## Washer dryers



Energy efficient washer dryers All Siemens washer dryers automatically adapt the wash time and energy consumption to the amount of laundry in the machine.



Extremely Quiet Our washer dryers are designed to be as quiet as possible while still offering excellent performance and results when washing and drying, so you can get on with your day without any disturbance.



rapid15 Washes, rinses and spins lightly soiled clothing in just 15 minutes, designed for those with hectic lives this wash cycle will clean clothes when you're in a hurry.



Washing Capacity The large 7kg washing capacity ensures you can wash clothes with fewer loads.



Drum Clean An automatic alert after 20 washes to run the Drum Clean programme on a 90°C or 60°C wash keeps the appliance clean and odour free



hydroSafe Guarantees 100% lifelong protection against water damage. If a leak does occur, hydroSafe immediately cuts off the water supply from the tap.



Washing + Drying The continuous washing and drying cycle is suitable for loads up to 4kg. This cycle will first wash the clothes on your chosen setting and once finished, automatically switches to drying the clothes for ease and speed.



**Drying Capacity** The 4kg drying capacity ensures you can dry clothes effectively.



### Other product features

### autoLoad

Removes the guesswork from laundry, automatically selecting the correct programme for your clothes to produce the best results. All you need to do is add detergent and laundry – the machine will do the rest.

### aquaTronic wash system

The perfect wash for delicates. Water enters the drum from three sides to quickly soak the delicate fabrics, eliminating the dry friction within the drum, while the flat sided paddles do their work, delivering a more gentle wash action for delicate fabrics.

### flexiTime

Designed for when speed is the only option, flexiTime reduces selected laundry cycles by up to 30%.

### Fluff clean

A ten minute fluff removal cycle on washer dryers that removes fluff deposits in the machine, a light indicates when this is needed.

### Foam detection system

Detects if too much foam has been created in the wash, if so, it will adjust the drum movement and add an extra rinse cycle if necessary.

### Night wash programme

Specially designed to wash and dry up to 4kgs overnight.

### rapid60

Perfect for washing large amounts of clothes, fast, rapid60 washes 5kg in 60 minutes.

### reload Function

The reload function allows the machine to be paused and the door opened at the next safe opportunity. It's the perfect solution when an extra item needs to be added to the load.

# Washing machines and washer dryers

### Designed to make laundry less of a chore.




Stay in control and let the laundry fit around you. The timeLight projects the remaining cycle time and programme status onto any floor surface to keep you informed at a glance – which is visible without opening the cabinet door.



### 8kg Capacity

The iQ700 and iQ500 built-in washing machines comes with a generous 8kg capacity, perfect for ensuring you always have enough room for every load. This results in fewer washes and better use of

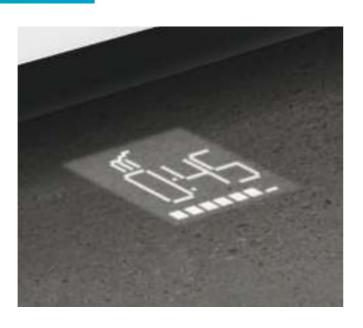









### io 500 WI14W300GB White

### Washing machine

- Capacity: 8kg
- Noise (wash) 41dB (A) re 1pW
- Noise (spin) 67dB (A) re 1pW

10700 WI14W500GB White

- Max. spin speed: 1400rpm
- timeLight projects the remaining cycle time onto the floor
- varioPerfect change the setting on some washes to what is most important to you; time or energy
- Special programmes rapid60, darkwash, shirts/blouses, textile guard, mixed load, hygiene, rapid15, duvet, drum clean with reminder, rinse/spin/drain,
- Time delay wash when the time is right for you
- Large display for easy navigation
- Energy consumption per cycle 0.78kWh (full load 60°C cotton programme)
- Moisture content % on dry load after max. spin 53%
- Estimated annual energy and water consumption (wash 220 full loads) - 137kWh; 9900 l'itres

### Washing machine

- Canacity: 8kg
- Noise (wash) 41dB (A) re 1pW
- Noise (spin) 67dB (A) re 1pW
- Max. spin speed: 1400rpm
- varioPerfect change the setting on some washes to what is most important to you; time or energy
- Special programmes extra rinse, drain/spin, rapid15, mixed load, wool, delicates/silk
- Time delay wash when the time is right for you
- Large display for easy navigation
- Energy consumption per cycle 0.85kWh (full load 60°C cotton programme)
- Moisture content % on dry load after max. spin 53%
- Estimated annual energy and water consumption (wash 220 full loads) 157kWh; 9900 litres

### All the latest technology and innovation behind closed doors



Guarantees 100% lifelong protection against water damage. If a leak does occur, hydroSafe immediately cuts off the water supply from the tap.



### Extremely quiet

Our built-in washing machines are some of the guietest on the market, which also set the benchmark for low noise when spinning. Thanks to the antiVibration side panels, any noise from vibrations is significantly reduced. Now you can relax in the comfort that your Siemens built-in laundry appliance will minimise any noise when running so you can entertain, relax or get on with your day without disturbance.

















### ic 500 WK14D541GB White

### Washer dryer

- Capacity: 7kg washing, 4kg drying
- Noise (wash, spin, dry) 57dB (A) re 1pW, 74dB (A) re 1pW, 60dB
- Max. spin speed: 1400rpm
- Non-stop wash and dry programme; 4kg
- Special programmes night wash, mixed load, outdoor, shirts/blouses, rapid15, rinsing/spinning, drain/spin, wool, delicates/silk
- 1 special drying programme fluff removal cycle
- Time delay/time remaining wash and dry when right for you
- Large display for easy navigation
- Energy consumption per cycle 1.27kWh wash; 5.5kWh wash & dry
- Water consumption per cycle 105 litres wash & dry
- Estimated annual energy and water consumption (wash & dry 200 full loads) – 1100kWh; 21000 litres (wash only 200 full loads) – 254kWh; 10200 litres


### iQ300 WK14D321GB White

### Washer dryer

- Capacity: 7kg washing, 4kg drying
- Noise (wash, spin, dry) 57dB (A) re 1pW, 74dB (A) re 1pW, 60dB
- Max. spin speed: 1400rpm
- Non-stop wash and dry programme: 4kg
- Special programmes mixed load, rinsing/spinning, drain/spin, wool, delicates/silk
- 1 special drying programme fluff removal cycle
- Time delay/time remaining wash and dry when right for you
- Energy consumption per cycle 1.27kWh wash; 5.5kWh wash & dry
- Water consumption per cycle 99 litres wash & dry
- Estimated annual energy and water consumption (wash & dry 200 full loads) 1100kWh; 19800 litres (wash only 200 full loads) 254kWh; 10200 litres

Customer services

Customer services

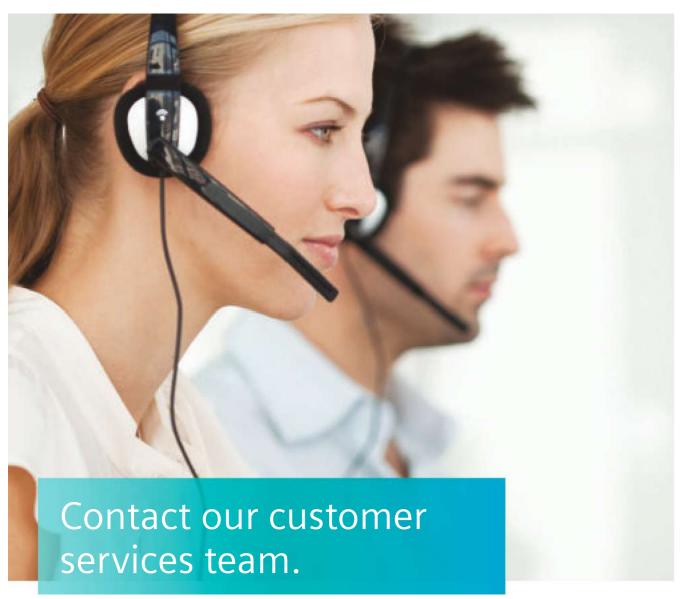

Purchasing a Siemens appliance gives you access to our expert customer service team for the lifetime of your appliance. With 2 year and 5 year manufacturer's warranties on offer\*, multi-award winning products to choose from and assistance from an outstanding customer service department, you can be assured that the appliance you are buying will offer peace of mind.

### **Expert advice**

Siemens customer service staff are full of knowledge and expertise, whether you have a question about your Siemens appliance, want to order replacement spare parts or require an engineer to repair your appliance. With engineers based locally across the country\*\*, no one is better suited to help, and all Siemens repairs are analysed in advance so that we bring the correct replacement spare parts likely to be needed on the first visit\*\*\*.

Original replacement spare parts
Order replacement parts online and access
exploded diagrams to help you locate the
correct part. As a manufacturer we only
use original spare parts and we keep a
comprehensive range of parts available for
up to ten years to ensure the quality of your
appliance. You can also browse appliance
diagrams online to locate and purchase the
parts you need.

Accessories and cleaning products
You can order accessories and cleaning
products quickly and easily via our Siemens
online shop. The Siemens shop has an
extensive selection of accessories to help you
get the most out of your Siemens appliance.
With our range of tested and approved
cleaning and care products you can keep
your appliance looking great and working at
its optimum performance. You can quickly
order accessories and cleaning products by
telephone on 0344 892 8999 (option 2) or
by visiting our online shop at www.siemenshome.bsh-group.com/uk/shop.

Arrange a Siemens engineer visit
Need to arrange an engineer visit? No
problem. Simply call our customer service
team to discuss the problem with your
appliance and if needed we will arrange a
home appointment with an engineer at a
time and date that's convenient for you.
Siemens appliances are built to the highest
standards but if you do require an engineer
to repair your appliance, we are here to help,
whether your appliance is inside or outside
the manufacturer's warranty period. You can
book an appointment by telephone on 0344
892 8999 (option 1) or you can book online.

Our engineers are employed and trained by Siemens and are based locally around the country\*\*.

No one knows our appliances better, and all repairs are analysed in advance by our technical team so that the parts likely to be needed to complete the repair are sent to the engineer's van the night before the visit\*\*\*.

Our advisors provide expert assistance

- Product information before and after purchase
- Tips on functions and operation
- User related queries
- Help with Siemens promotions

Telephone:

UK: 0344 892 8999 (options 3 and 4)

For product support available 24 hours

- a day visit our website for:Product information
- Downloadable brochures
- Videos
- Instruction manuals
- FAQs

siemens-home.bsh-group.com/uk siemens-home.bsh-group.com/ie

Accessories and cleaning products We stock an extensive selection of accessories and cleaning products to help you make the most of your Siemens appliance.

- Original accessories for Siemens appliances
- Tested and approved cleaning and care products
- Quickly and easily order your accessories and cleaning products by telephone or via our online shop

Telephone:

UK: 0344 892 8999 (option 2) IRL: 01450 2655

siemens-home.bsh-group.com/uk siemens-home.bsh-group.com/ie

Replacement spare parts

As the manufacturer, we only use original spare parts to ensure the quality of your appliance.

- Comprehensive range of parts kept available for up to 10 years
- Original spare parts
- Browse appliance diagrams online to locate and purchase the parts you need

Telephone:

UK: 0344 892 8999 (option 2) IRL: 01450 2655

siemens-home.bsh-group.com/uk siemens-home.bsh-group.com/ie

Arrange an engineer visit
Siemens appliances are built to the highest standards but if you do require an engineer to repair your appliance, we are here to help, whether your appliance is inside or outside the manufacturer's warranty period. Our engineers are employed and trained by Siemens and are based locally around the country\*\*.

No one knows our appliances better, and all repairs are analysed in advance by our technical team so that the parts likely to be needed to complete the repair are sent to the engineer's van the night before the visit\*\*\*.

 Arrange an engineer appointment at a time and date that's convenient for you

Telephone

UK: 0344 892 8999 (option 1) IRL: 01450 2655

www.siemens-home.bsh-group.com/uk www.siemens-home.bsh-group.com/ie\*\*\*\*

# Register your manufacturer's warranty FREE 2 year warranty FREE 10 year iQdrive Motor warranty

FREE 2 year warranty Telephone: UK: 0800 519 2116

IRL: **01230 0344** 

Or register online: siemens-home.bsh-group.com/uk

siemens-home.bsh-group.com/ie

FREE 5 year warranty (selected appliances only)
The extended warranty covers, at no
extra cost; parts, labour and call out

charges.

To register telephone: UK: **0344 892 8999** (option 5)

IRL: 01450 2655

Or register online: siemens-home.bsh-group.com/uk siemens-home.bsh-group.com/ie

A full copy of our warranty terms and conditions is available on request, or can be viewed via the Siemens website.

machines and washer dryers. Please keep a proof of purchase if you own an applicable appliance to register the iQdrive motor warranty.

and is available on selected washing

Covers the cost of a replacement motor<sup>†</sup>

FREE 10 year Anti-Rust Warranty for dishwashers

Covers rusting throughout the inner cavity of all dishwashers from the inside out. This warranty can be registered during the 2 year and 5 year Siemens registration process.

# Register / my appliance

Siemens recommends that you register all home appliances to ensure you can be easily contacted in the event of an important product update. For more information about registering appliances of all brands, please visit: www.registermyappliance.org.uk



- \* The 5 year manufacturer's warranty is available on selected appliance models only.
- \*\* In certain areas we may use an approved service partner.
- \*\*\* This process may vary where approved service partners are used by us.
- \*\*\*\* Online booking not available in the Republic of Ireland.
- † iQdrive warranty covers the cost of a replacement motor only. All labour and call-out charges outside of the 5 year warranty are not covered. A full copy of our warranty terms and conditions is available on request, or can be viewed via the Siemens website. Calls to 0344 numbers are charged at the basic rate, please check with your telephone service provider for exact charges.



Ovens | Specifications | Ovens

# activeClean® single oven specifications

Design family	[Q 700	iQ 700	iQ 700	iQ 700	iQ 700
Model number Black glass with steel trim	HN678GES6B ■	HM678G4S6B ■	HM676G0S6B ■	HR678GES6B ■	HR676GBS6B
DESIGN CHARACTERISTICS		_		-	_
FT TouchDisplay Plus			-		-
FT TouchDisplay	-	-		-	
FT Display	-	-	-	-	-
ightControl illuminated dials		-	-	-	-
stainless steel navigation control dial	-		-	-	
Standard bar handle	-	-	-	-	-
Iluminated key buttons					
KEY FEATURES	_	_	_	_	_
Home Connect	-				
activeClean oven cleaning					
roastingSensor Plus			-		-
bakingSensor Plus	-	-	-		-
roastingSensor	<u> </u>		-		
coolStart cookControl Plus		- :	-	-	- :
cookControl	-	-	-	-	-
softMove door opening and closing					
Telescopic rail (levels)	<del>-</del>	1	1	-	= =
CONTROLS					
Electronic control					
Digital temperature display with proposal					
Actual temperature display					
Heating up indicator / Residual heat indicator	<b>=</b> / <b>=</b>	■/■ ■/■	<b>=</b> / <b>=</b>	<b>■/</b>	=/=
Control panel lock / Door lock	=/=	=/=	=/=	=/=	=/=
Main on/off switch Automatic safety switch off	-	-	-	-	
Electronic clock timer	-	-	-	-	
FEATURES					
Back / roof / side ecoClean® Direct liners	-	-	-	-	-
ecoClean® setting	_	-	-	-	-
Interior lights	Multi level LED	Multi level LED	1 X LED	Multi level LED	1 X LED
Light on/off when oven door opened/closed	•				-
Smooth enamelled oven interior	•				
Full glass inner door	Our double	Our drough	Our drawle	Our drawels	Over devente
Door glazing Number of shelf positions	Quadruple 5	Quadruple 5	Quadruple 5	Quadruple 5	Quadruple 5
Water tank empty indicator	5				
PROGRAMMES / FUNCTIONS				_	_
hotairGentle	•				
4D hotAir cooking					
3D hotAir cooking	_	-	-	-	-
Microwave	•			-	-
Number of Microwave combination options	5	5	5	-	-
coolStart					
Full width surface grill Centre surface grill			-	-	-
Hot air grilling	-	- :	-		
Pizza setting	-			-	
Conventional					
Conventional Gentle					
Intensive heat			-		-
Bottom heat					
Keep warm / Plate warming	<b>=</b> / <b>=</b>	■/■	<b>I</b> / <b>I</b>	■/■	<b>=</b> / <b>=</b>
ow temperature cooking					
Orying	-		-	-	
Fast pre-heating function ADDITIONAL FUNCTIONS WITH STEAM	-		-	-	
ullSteam	_	-	-	-	-
pulseSteam		-	-		
Added Steam	_	-	-	-	-
Number of pulseSteam combination options	6	-	-	6	6
Dough proving		-	-		
Reheating	•	-	-		
Defrost		-	-		_
Descaling programme Cavity drying function		-	-	-	-
PERFORMANCE / TECHNICAL INFORMATION		_	-		
Cavity dimensions (H x W x D) mm	357 x 480 x 392	357 x 480 x 392	357 x 480 x 392	357 x 480 x 415	357 x 480 x 41
Oven capacity¹ (litres)	67	67	67	71	71
Nater tank capacity (L)	1.0	-	-	-	-
nverter technology <sup>3</sup>				-	-
Maximum Microwave power (W)	800	800	800	-	-
Number of Microwave power levels	5	5	5	-	-
Nominal voltage (volts)	220-240	220-240	220–240	220-240	220-240
Total connected loading (watts)	3600	3600	3600	3600	3600
Cable length (cm) ENERGY EFFICIENCY DATA	120	120	120	120	120
Energy efficiency class <sup>1,2</sup>	_	-	-	A+	A+
Energy consumption 4D hotAir (kWh)	_		_	0.69	0.69
Energy consumption 4D HotAli (kWh)		-		0.87	0.87
Time to cook standard load (mins)	-	-	-	44	44
	1290	1290	1290	1290	1290
	1230				
argest baking sheet area (cm) STANDARD ACCESSORIES					
argest baking sheet area (cm) TANDARD ACCESSORIES 'ull width enamelled pan	1	1	1	1	1
argest baking sheet area (cm) STANDARD ACCESSORIES Full width enamelled pan Wire shelves Steam tray, perforated (S,L,XL) / Unperforated (S)			1 2 -	1 2 -	1 2 -

<sup>■</sup> Yes, model has this feature. 
- Feature not available for this model.

<sup>1</sup>Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation). <sup>2</sup>A+++ = more efficient, D = less efficient. <sup>3</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

### For specification details, please log on to siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories please visit our online accessory shop on siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

## activeClean® single oven specifications

APPLIANCE TYPE Design family	iQ700	iQ700	E OVENS	iQ 500
Model number	HB678GBS6B	HB676GBS6B	HB672GBS1B	HB578A0S0B
Black glass with steel trim				
DESIGN CHARACTERISTICS IFT TouchDisplay Plus		_	_	-
FFT TouchDisplay	-		-	-
TFT Display	-	-	•	-
ightControl illuminated dials Stainless steel navigation control dial	-	-	-	-
Slimline bar handle	-	-	-	
Standard bar handle	-	-	-	
lluminated key buttons	-			
KEY FEATURES Home Connect				
activeClean oven cleaning		-	-	-
roastingSensor Plus		<del>-</del>	-	-
pakingSensor Plus	•	_	-	-
roastingSensor	<u>-</u>	<u>-</u>	-	
coolStart cookControl Plus		-	-	-
cookControl	=	<del>-</del>	-	30
softMove door opening and closing	•			-
Telescopic rail (levels)	-	-	-	1 x clip rail
CONTROLS  Floctronic control				_
Electronic control Digital temperature display with proposal				
Actual temperature display		-		-
Heating up indicator / Residual heat indicator	■/■	<b>=</b> / <b>=</b>	=/=	=/=
Control panel lock / Door lock  Main on/off switch	<b>=</b> / <b>=</b>	<u> </u>	<b>=</b> /=	=/=
Main on/off switch Automatic safety switch off				
Electronic clock timer				
FEATURES				
Back / roof / side ecoClean® Direct liners	-	-	-	-
ecoClean® setting Interior lights	– Multi level LED	1 X LED	1 X halogen	1 x 25W halogen
Ceiling integrated LED	INIUITI IEVEI LED	T X LED	- Tallogen	- T X 25W Halogell
Multilevel LED	•	-	-	-
Light on/off when oven door opened/closed	•	•	•	-
Smooth enamelled oven interior Full glass inner door			-	-
Door glazing	Quadruple	Quadruple	Quadruple	Quadruple
Number of shelf positions	5	5	5	5
Water tank empty indicator	-	-	-	-
PROGRAMMES / FUNCTIONS		_		_
notairGentle 4D hotAir cooking			-	-
3D hotAir cooking	-	-	-	-
Microwave	-	_	-	-
Number of Microwave combination options	-	-	-	-
coolStart	•		•	
Full width surface grill Centre surface grill	-		•	-
Hot air grilling		-	•	•
Pizza setting		-		
Conventional	•		•	
Conventional Gentle	•			-
ntensive heat Bottom heat		<u>-</u>	-	-
Keep warm / Plate warming	<b>-</b>	<b>=</b> / <b>=</b>		-
Low temperature cooking	-/-		-	
Drying		-	-	-
Fast pre-heating function				
ADDITIONAL FUNCTIONS WITH STEAM fullSteam	-	-	-	-
pulseSteam	-	-	-	-
Added Steam	-	-	-	-
Number of pulseSteam combination options	-	-	-	-
Dough proving	-	-	-	-
Reheating Defrost	-	-	-	-
Descaling programme	-	-	-	-
Cavity drying function	-	-	-	-
PERFORMANCE / TECHNICAL INFORMATION	25-	257 400 115	257 400 117	252 465 115
Cavity dimensions (H x W x D) mm	357 x 480 x 415	357 x 480 x 415 71	357 x 480 x 415 71	357 x 480 x 415
Oven capacity <sup>1</sup> (litres) Water tank capacity (L)	71	- /1	-	- /1
nverter technology <sup>3</sup>	-	-	-	-
Maximum Microwave power (W)	-	-	-	-
Number of Microwave power levels	-	-	-	-
Nominal voltage (volts)	220-240	220-240	220-240	220-240
Fotal connected loading (watts)  Cable length (cm)	3600 120	3600 120	3600 120	3600 120
ENERGY EFFICIENCY DATA	120	120	120	120
Energy efficiency class <sup>1,2</sup>	A+	A+	A+	A
Energy consumption 4D hotAir (kWh)	0.69	0.69	0.69	0.81
	0.87	0.87	0.87	0.99
Energy consumption conventional (kWh)	44	44	44	50
Fime to cook standard load (mins)		1200		
Time to cook standard load (mins) Largest baking sheet area (cm)	1290	1290	1290	1290
Fime to cook standard load (mins) Largest baking sheet area (cm) STANDARD ACCESSORIES	1290	1290	1290	1290
Time to cook standard load (mins) Largest baking sheet area (cm)				

Yes, model has this feature. 
- Feature not available for this model

<sup>1</sup>Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation). <sup>2</sup>A+++ = more efficient, D = less efficient. <sup>3</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Ovens | Specifications Specifications | Ovens

# Single oven specifications

APPLIANCE TYPE	iQ700	iQ 700	SINGLE OVENS	iQ 700	iQ500
Design family Model number	HS658GES6B	HM656GNS6B	HB656GBS6B	HB632GBS1B	HB535A0S0B
Black glass with steel trim	TI3030GE30B	TIMOSOGIVSOB	TIBOSOGBSOB	11003200310	TIBSSSAUSUB
DESIGN CHARACTERISTICS	_	_	_	_	_
TFT TouchDisplay Plus		-	-	-	-
TFT TouchDisplay	-			-	-
TFT Display	-	-	-		-
lightControl illuminated dials	-	-	-	-	
Stainless steel navigation control dial				<u> </u>	-
Slimline bar handle Standard bar handle	•	-		•	-
Illuminated key buttons	-	•	-		
KEY FEATURES					
Home Connect				-	_
activeClean oven cleaning	_	-	_	-	-
roastingSensor Plus		-	-	-	-
bakingSensor Plus		-	-	-	-
roastingSensor	-	-	-	-	-
coolStart	•				-
cookControl Plus				-	-
cookControl	-	-	-	-	10
softMove door opening and closing					
Telescopic rail (levels)	-	1	-	-	1 x clip rail
CONTROLS Electronic control		_	_	_	-
Digital temperature display with proposal	-		-	-	
Actual temperature display with proposal	-		-	-	
Heating up indicator / Residual heat indicator	- -		<u>-</u>		■/-
Control panel lock / Door lock	■ /-	■/-	■/-	■/-	■/-
Main on/off switch		•		•	-
Automatic safety switch off					-
lectronic clock timer					
EATURES					
Back / roof / side ecoClean® Direct liners				■ / - / -	■1-1-
ecoClean® setting					-
nterior lights	Multi level LED	1 X LED	1 X LED	1 X halogen	1 x 25W haloger
ight on/off when oven door opened/closed	-				
Smooth enamelled oven interior Full glass inner door			-	-	-
Door glazing	Triple	Triple	Triple	Triple	Triple
Number of shelf positions	5	5	5	5	5
Nater tank empty indicator	•	_	_	_	_
PROGRAMMES / FUNCTIONS					
notairGentle	-				
1D hotAir cooking					-
BD hotAir cooking	-	-	-	-	
Microwave	-		-	-	-
Number of Microwave combination options	-	5	-	-	-
coolStart				<u> </u>	_
Full width surface grill  Centre surface grill			-		-
Hot air grilling	-		-	•	
Pizza setting			-	-	-
Conventional			-	-	
Conventional Gentle	-				
ntensive heat	-	-	-	-	-
Bottom heat				-	-
Keep warm / Plate warming	■/■	<b>I</b> / <b>I</b>	■/■	-	-
ow temperature cooking				-	-
Orying		-	-	-	-
ast pre-heating function					
ADDITIONAL FUNCTIONS WITH STEAM					
ullSteam		-	-	-	-
oulseSteam Added Steam	-	-	-	-	-
Jumber of pulseSteam combination options	6				
	b			_	
		_	_	_	_
Oough proving Reheating Defrost		-	-	-	-
Reheating Defrost			-		- - -
deheating Defrost Descaling programme		-	-	-	
teheating Defrost Descaling programme Lavity drying function DEFFORMANCE / TECHNICAL INFORMATION		- - -	- - -	- - -	-
teheating Defrost Descaling programme Cavity drying function DERFORMANCE / TECHNICAL INFORMATION Cavity dimensions (H x W x D) mm	357 x 480 x 415	- - - 357 x 480 x 392	- - - - 357 x 480 x 415	- - - 357 x 480 x 415	- - 357 x 480 x 415
eheating lefrost escaling programme avity drying function ERFORMANCE / TECHNICAL INFORMATION avity dimensions (H x W x D) mm liven capacity¹ (litres)	357 x 480 x 415	- - - 357 x 480 x 392	- - - - 357 x 480 x 415	- - - 357 x 480 x 415	- - 357 x 480 x 41!
eheating  efrost  escaling programme  avity drying function  ERFORMANCE / TECHNICAL INFORMATION  avity dimensions (H x W x D) mm  ven capacity¹ (litres)  Vater tank capacity (L)	357 x 480 x 415	- - - 357 x 480 x 392 67 -	- - - - - 357 x 480 x 415	- - - 357 x 480 x 415 71	- - 357 x 480 x 415 71 -
eheating  efrost  efrost  escaling programme  avity drying function  ERFORMANCE / TECHNICAL INFORMATION  avity dimensions (H x W x D) mm  EXPROSED (litres)  Ven capacity (litres)  Alater tank capacity (L)  everter technology	357 x 480 x 415 71 - -	- - - 357 x 480 x 392 67 -	- - - - 357 x 480 x 415 71 -	- - - 357 x 480 x 415 71 - -	- - 357 x 480 x 415 - -
eheating lefrost lefrost lescaling programme lavity drying function  ERFORMANCE / TECHNICAL INFORMATION lavity dimensions (H x W x D) mm liven capacity (litres) later tank capacity (L) liverter technology <sup>3</sup> laximum Microwave power (W)	357 x 480 x 415 71	- - - 357 x 480 x 392 67 - - 800	- - - - - 357 x 480 x 415	- - - 357 x 480 x 415 71	- - 357 x 480 x 415 71 - -
eheating lefrost lescaling programme avity drying function IERFORMANCE / TECHNICAL INFORMATION avity dimensions (H x W x D) mm liven capacity¹ (litres) Vater tank capacity (L) nverter technology³ Aaximum Microwave power (W) lumber of Microwave power levels	357 x 480 x 415 71	- - - 357 x 480 x 392 67 - - ■ 800 5	- - - - 357 x 480 x 415 71 - - -	- - - 357 x 480 x 415 71 - - -	- - 357 x 480 x 41! 71 - - -
teheating  lefrost  Descaling programme  Lavity drying function  LERFORMANCE / TECHNICAL INFORMATION  Lavity dimensions (H x W x D) mm  Deven capacity¹ (litres)  Vater tank capacity (L)  niverter technology³  Aaximum Microwave power (W)  Jumber of Microwave power levels  Jominal voltage (volts)	357 x 480 x 415 71 		- - - - 357 x 480 x 415 71 - - - - 220-240	- - 357 x 480 x 415 71 - - - 220-240	- - 357 x 480 x 41! 71 - - - - 220-240
teheating  Defrost  Descaling programme  Davity drying function  DERFORMANCE / TECHNICAL INFORMATION  Davity dimensions (H x W x D) mm  Deven capacity¹ (litres)  Vater tank capacity (L)  Inverter technology³  Jaximum Microwave power (W)  Jumber of Microwave power levels  Jominal voltage (volts)  Jotal connected loading (watts)	357 x 480 x 415 71	- - 357 x 480 x 392 67 - ■ 800 5 220-240 3600	- - - 357 x 480 x 415 71 - - - 220-240 3600	- - 357 x 480 x 415 71 - - - 220-240 3600	- - 357 x 480 x 41! 71 - - - 220-240 3600
teheating  lefrost  befrost  bescaling programme  Lavity drying function  IERFORMANCE / TECHNICAL INFORMATION  Lavity dimensions (H x W x D) mm  Diven capacity¹ (litres)  Vater tank capacity¹ (l)  nverter technology²  Azaximum Microwave power (W)  Iumber of Microwave power levels  Iominal voltage (volts)  total connected loading (watts)  Lable length (rm)	357 x 480 x 415 71 		- - - - 357 x 480 x 415 71 - - - - 220-240	- - 357 x 480 x 415 71 - - - 220-240	- - 357 x 480 x 41! 71 - - - - 220-240
teheating  Defrost  Defrost  Defrost  Descaling programme  Lavity drying function  Defrost  D	357 x 480 x 415 71 - - - - 220-240 3600 120	- - 357 x 480 x 392 67 - ■ 800 5 220-240 3600		- - - 357 x 480 x 415 71 - - - - 220-240 3600 120	- - 357 x 480 x 41! 71 - - - - 220-240 3600 120
Reheating Defrost Descaling programme Lavity drying function DERFORMANCE / TECHNICAL INFORMATION Deven capacity ' (litres) Vater tank capacity (L) Inverter technology <sup>3</sup> Maximum Microwave power (W) Mumber of Microwave power levels Mominal voltage (volts) Total connected loading (watts) Lable length (cm) LIRRENCY EFFICIENCY DATA Linergy efficiency class <sup>1,2</sup>	357 x 480 x 415 71	- - 357 x 480 x 392 67 - ■ 800 5 220-240 3600 120	- - - 357 x 480 x 415 71 - - - 220-240 3600	- - 357 x 480 x 415 71 - - - 220-240 3600	- - 357 x 480 x 415 71 - - - 220-240 3600
teheating  Defrost  Descaling programme  Deavity drying function  DERFORMANCE / TECHNICAL INFORMATION  Deavity dimensions (H x W x D) mm  Deven capacity¹ (litres)  Vater tank capacity (L)  Inverter technology³  Alaximum Microwave power (W)  Jumber of Microwave power levels  Jominal voltage (volts)  Total connected loading (watts)  Lable length (cm)  NERGY EFFICIENCY DATA  Inergy efficiency class¹²²  Inergy consumption 4D hotAir (kWh)	357 x 480 x 415 71		- - - 357 x 480 x 415 71 - - - 220-240 3600 120	- - 357 x 480 x 415 71 - - - 220-240 3600 120	- - 357 x 480 x 41! 71 - - - - 220-240 3600 120
teheating  Defrost  Defrost  Defrost  Descaling programme  Lavity drying function  DERFORMANCE / TECHNICAL INFORMATION  Lavity dimensions (H x W x D) mm  Doen capacity¹ (litres)  Vater tank capacity¹ (litres)  Vater tenk capacity (L)  Inverter technology³  Maximum Microwave power (W)  Iumber of Microwave power levels  Iominal voltage (volts)  Iotal connected loading (watts)  Lable length (cm)  ENERGY EFFICIENCY DATA  Inergy efficiency class¹²  Inergy consumption 4D hotAir (kWh)  Inergy consumption conventional (kWh)	357 x 480 x 415 71	357 x 480 x 392 67 ■ 800 5 220-240 3600 120	- - - 357 x 480 x 415 71 - - - 220-240 3600 120 A+ 0.69		- 357 x 480 x 415 71 - - - 220-240 3600 120 A 0.81
Reheating Defrost Descading programme Descading programme Descading programme Descading function Descading dimensions (H x W x D) mm Deven capacity¹ (litres) Deven capacity¹ (litres) Deven capacity¹ (L) Deventer technology³ Descading microwave power (W) Deventer technology³ Descading function of Microwave power levels Descading function of Microwave power levels Descading function of Microwave power levels Descading function of Descading (watts) Descading function of Descading fu	357 x 480 x 415 71 220-240 3600 120  A+ 0.69 0.87			- - - 357 x 480 x 415 71 - - - 20-240 3600 120 A+ 0.69 0.87	
eheating lefrost lefrost lesescaling programme lavity drying function  ERFORMANCE / TECHNICAL INFORMATION lavity dimensions (H × W × D) mm liven capacity¹ (litres) liver teachnology² laximum Microwave power (W) lumber of Microwave power levels lominal voltage (volts) otal connected loading (watts) able length (cm)  NERGY EFFICIENCY DATA nergy efficiency class¹-² nergy efficiency class¹-² nergy consumption 4D hotAir (kWh) nergy consumption conventional (kWh) ime to cook standard load (mins) argest baking sheet area (cm) TANDARD ACCESSORIES	357 x 480 x 415 71				
eheating lefrost lescaling programme avity drying function ERFORMANCE / TECHNICAL INFORMATION avity dimensions (H x W x D) mm byen capacity¹ (litres) Vater tank capacity¹ (litres) Vater tank capacity (L) nverter technology² Maximum Microwave power (W) lumber of Microwave power levels lominal voltage (volts) otolala voltage (volts) otolale length (cm) NERGY EFFICIENCY DATA nergy efficiency class¹²² nergy consumption 4D hotAir (kWh) nergy consumption conventional (kWh) ime to cook standard load (mins) argest baking sheet area (cm) TANDARD ACCESSORIES ull width enamelled pan	357 x 480 x 415 71 220-240 3600 120  A+ 0.69 0.87 44 1290				
Reheating Defrost Defrost Descaling programme Lavity drying function DERFORMANCE / TECHNICAL INFORMATION Lavity dimensions (H x W x D) mm Doven capacity¹ (litres) Water tank capacity (L) Inverter technology³ Maximum Microwave power (W) Mumber of Microwave power levels Mominal voltage (volts) Total connected loading (watts) Cable length (cm) INERGY EFFICIENCY DATA Energy consumption 4D hotAir (kWh) Energy consumption 4D hotAir (kWh) Energy cosonsumption conventional (kWh) Time to cook standard load (mins)	357 x 480 x 415 71				

Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation). <sup>2</sup>A+++ = more efficient, D = less efficient. <sup>3</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

### For specification details, please log on to siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories please visit our online accessory shop on siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

# Double oven specifications

APPLIANCE TYPE		BUILT-IN DO	OUBLE OVENS		BUILT-UNDER DOUBLE OVENS				
Design family	iQ	500	iQ	500	iQ	500	iQ	500	
Model number	MB557	7G5S0B	MB535A0S0B NB557ABS0B NB535AB		535ABSOB				
Black glass with steel trim									
DESIGN CHARACTERISTICS	MAIN	2ND	MAIN	2ND	MAIN	2ND	MAIN	2ND	
Glass and metal fascia									
lightControl illuminated dials	2	2	2	2	2	2	2	2	
Standard bar handle		_							
Key button controls									
Telescopic shelf rail		ip rail		ip rail		-	-		
CONTROL	MAIN	2ND	MAIN	2ND	MAIN	2ND	MAIN	2ND	
Electronic control	IVIAIIV	2110	IVIAIN	-	IVIAIIV	ZND	IVIAIIV	2110	
Digital temperature display with proposal	_	_	_	_	_	_	_	_	
Actual temperature display	_	_	_	_		_	_	_	
Heating up indicator		_		_		_		_	
Residual heat indicator	-	_	-	_		_	-	_	
cookControl	10	_	10	_	_	_	_	_	
	10		10	_	_	_	_		
Control panel lock Automatic safety switch off	-	•	-	-	_	_	-	-	
	_	_	_	_	_	_	_	_	
Sabbath setting FEATURES	MAIN	- 2ND	MAIN	2ND	MAIN	- 2ND	MAIN	2ND	
	MAIN	ZND	MAIN	ZND	MAIN	ZND	MAIN	ZND	
Pyrolytic cleaning Back / roof / side ecoClean® liners			_						
	=/=/=	=/=/=	■1-1-	=/=/=	=/=/=	=/=/=	■1-1-	=/=/=	
ecoClean® setting	-	-	-	-	-	-	_	_	
Meat probe		-		-	_	-			
Electronic clock timer		-	-	-		-	-	-	
Automatic on/off programmer		-	4 2500	4 25141 1	4 251111		4 25141 1	- 25141 1	
Internal light	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halog	
Smooth enamelled oven interior	•		-	•	<u> </u>	-	•	-	
Full glass inner door									
Door glazing	Triple	Triple	Double	Triple	Triple	Triple	Double	Triple	
Number of shelf positions	5	3	5	3	3	3	3	3	
softClose door		-	-	-		-	-	-	
PROGRAMMES / FUNCTIONS	MAIN	2ND	MAIN	2ND	MAIN	2ND	MAIN	2ND	
hotairGentle		-		-		-		-	
3D hotAir cooking		-		-		-		-	
Defrosting	-	-	-	-	-	-	-	-	
Full width surface grill									
Centre surface grill	-		-		-		-	-	
Hot air grilling		-		-		-		-	
coolStart	-	-	-	-	-	-	-	-	
Pizza setting		-	-	-		-	-	-	
Conventional top & bottom heating			-	-				-	
Bottom heat			-				-		
Low temperature cooking	-	-	-	-	-	-	-	-	
Rapid pre-heating		-		-		-		-	
PERFORMANCE / TECHNICAL INFORMATION	MAIN	2ND	MAIN	2ND	MAIN	2ND	MAIN	2ND	
Cavity dimensions (H x W x D) mm	357 x 480 x 415	166 x 480 x 426		166 x 480 x 426		166 x 480 x 426	237 x 480 x 415		
Oven capacity <sup>1</sup> (litres)	71	34	71	34	47	34	47	34	
Nominal voltage (V)		-240		-240		-240		-240	
Total connected loading (W)	62	100		200	56	500		500	
Cable length (cm)		_		_		-		_	
ENERGY EFFICIENCY CLASS 1,2	MAIN	2ND	MAIN	2ND	MAIN	2ND	MAIN	2ND	
Energy efficiency Class <sup>1,2</sup>	A	В	A	В	Α	В	A	В	
Energy consumption hot air (kWh)	0.81	-	0.81	-	0.71	-	0.71	-	
Energy consumption conventional (kWh)	0.97	0.83	0.97	0.83	0.80	0.83	0.80	0.83	
Time to cook standard load (mins)	44	45	44	45	45	45	45	45	
Largest baking sheet area (cm)	1290	1290	1290	1290	1290	1290	1290	1290	
STANDARD ACCESSORIES									
Full width enamelled pan		1		1		1		1	
Wire shelves		3		3		2		2	

<sup>■</sup> Yes, model has this feature. 
- Feature not available for this model.

<sup>1</sup>Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation).

<sup>2</sup>A+++ = more efficient, D = less efficient.

Compact appliances | Specifications

# Compact oven specifications

	- 1					
APPLIANCE TYPE	PYROLYTIC OVEN	STEAM COMBINATION OVEN	STEAM COMBINATION OVEN	STEAMER	PYROLYTIC OVEN WITH INTEGRAL MICROWAVE	PYROLYTIC OVEN WITH INTEGRAL MICROWAVE
Design family Model number Black glass with steel trim	<b>iQ700</b> CB675GBS1B	<b>C</b> S658GRS6B	CS656GBS6B	<b>iQ 700</b> CD634GBS1B	[Q]700 CM678G4S6B	<b>iQ700</b> CM676GBS6B
DESIGN CHARACTERISTICS Stainless steel navigation control dial	_					
TFT TouchDisplay Plus	= =		-	-	•	-
TFT TouchDisplay TFT Display	-		-	-	-	
lightControl illuminated dials	-	-	-	-	-	-
LCD Display Slimline bar handle	-	-	-	-	-	-
Standard bar handle	-	-	-	-	-	
Illuminated key buttons						
CONTROL Electronic control	_					
Digital temperature display with proposal	•			•		
Actual temperature display Heating up indicator / Residual heat indicator	<b>-</b>	<b>=</b>	<b>-</b>	<b>-</b> /-	<b>-</b>	
Control panel lock / Automatic safety switch off	<b>=</b> / <b>=</b>	= / = = / =	<b>=</b> / <b>=</b>	■ / =	<b>=</b> / <b>=</b>	= / =
Sabbath setting			-	-		
KEY FEATURES HomeConnect	-			_	_	
activeClean oven cleaning		=	=	-		•
roastingSensor Plus	-	-	-		-	
bakingSensor Plus coolStart	-	-	-		-	
Automatic programmes	10	-	-	20	-	-
cookControl Plus softMove door opening and closing	-	-		-	-	-
FEATURES	_	_	_	_		
Back / roof / side ecoClean® Direct liners	-	<b>=</b> / <b>=</b> / <b>=</b>	<b>=</b> / <b>=</b> / <b>=</b>	-	-	-
ecoClean® setting Interior lights halogen	-		-	<u> </u>	-	
Ceiling integrated LED	-		•	-	•	
Standard internal light Light on/off when oven door opened/closed	-	-	-		-	-
Smooth enamelled oven interior	:	-		Stainless steel	- :	
Full glass inner door						
Door glazing Number of shelf positions	Quadruple 3	Triple 3	Triple 3	Triple 4	Quadruple 3	Quadruple 3
Electronic clock timer	•			•	•	•
Main on/off switch					-	
Door lock Water tank empty indicator	-	-	-	-	-	-
PROGRAMMES / FUNCTIONS						
hotairGentle 4D hotAir cooking		-			-	-
hotAir cooking		-	-	-	-	=
Microwave	-	-	-	-		
Number of microwave combination options coolStart	-	-	-		5	5
Defrosting	-	With steam	With steam	With steam	-	-
Full width surface grill Centre surface grill				-	-	-
Hot air grilling		-	-		-	
Pizza setting				-	•	
Conventional Conventional Gentle		-			-	-
Intensive heat	<del>-</del>	-	-	-		-
Bottom heat	<b>-</b>		<b>-</b>			<b>-</b>
Keep warm / Plate warming Low temperature cooking		=/= =	-/-		=/=	-/-
Drying	-	With steam	With steam	With steam		-
Fast pre-heating function ADDITIONAL FUNCTIONS WITH STEAM			-	-		
fullSteam	-			-	-	-
pulseSteam	-	•	•	-	-	-
addedSteam Number of pulseSteam combination options	<u> </u>	_ 	6	-	-	
Dough proving	-	i	•		-	-
Reheating Cleaning & Descaling programme	<u>-</u>	-	-		-	
PERFORMANCE / TECHNICAL INFORMATION	-	_		_	-	_
Installation in base unit / tall housing	■/■	■/■	■/■	■/■	■/■	■/■
Cavity dimensions H x W x D (mm)  Oven capacity (litres)	235 x 480 x 415 47	235 x 480 x 415 47	235 x 480 x 415 47	265 x 325 x 439 38	237 x 480 x 392 45	237 x 480 x 392 45
Water tank capacity (litres)	1.0	1.0	1.0	1.3	-	-
nverter technology <sup>3</sup>	-	_	-	-		
Maximum Microwave power (W) Number of Microwave power levels	-		-		900	900
Energy efficiency class <sup>1,2</sup>	A+	A+	A+	-	-	-
Efficiency declared on	hotAir 0.61	hotAir 0.61	hotAir 0.61		-	-
Energy consumption 4D hot air (kWh) Energy consumption conventional (kWh)	0.61 0.73	0.61	0.61		-	
Time to cook standard load (mins)	46	41	41	-	-	-
Largest baking sheet area (cm) Nominal voltage (volts)	1290 220-240	1290 220-240	1290 220-240	220-240	1290 220-240	1290 220-240
Total connected loading (W)	3300	3300	3300	1900	3600	3600
Cable length (cm)	150	150	150	150	150	150
STANDARD ACCESSORIES Full width enamelled pan	1	1	1	1	1	1
Pan insert grid	-	-	-	-	-	-
Wire shelves High / low grid	1	1 -	1 -	1	2	1 –
Steam tray, perforated (S,L,XL) / unperforated (S,L,XL)		S, XL/S	S,XL/S	L/L	-	
Turntable diameter (mm)	-	-	-	-		-
1 level telescopic rail	-					_

<sup>■</sup> Yes, model has this feature. 
— Feature not available for this model.

¹Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation). ²A+++ = more efficient, D = less efficient. ³For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

### For specification details, please log on to siemens-home.bsh-group.com/uk and download a full specification sheet. For the full range of accessories please visit our online accessory shop on siemens-home.bsh-group.com/uk/shop or call our Spares Department on 0344 892 8999.

# Compact oven specifications

PPLIANCE TYPE	OVEN WITH INTEGRAL MICROWAVE	OVEN WITH INTEGRAL MICROWAVE	MICROWAVE	MICROWAVE COMBINATION WITH STEAM	MICROWAVE COMBINATION
esign family	iQ 700	iQ 700	iQ 700	iQ 500	iQ 500
lodel number Black glass with steel trim	CM656GBS6B	CM633GBS1B	CF634AGS1B	CP565AGS0B	CM585AMS0B
ESIGN CHARACTERISTICS ainless steel navigation control dial			_	_	_
T TouchDisplay Plus	-	_		_	_
T TouchDisplay		-	-	-	-
T Display	-	•		-	-
htControl illuminated dials	-	-	-		
D Display imline bar handle	-	-	-	•	-
andard bar handle	-	-		-	_
uminated key buttons					
ONTROL					
ectronic control		-			
igital temperature display with proposal		•		•	-
ctual temperature display		•			-
eating up indicator / Residual heat indicator ontrol panel lock / Automatic safety switch off	<b>I</b> / <b>I</b>			■ / - ■ / ■	
abbath setting	=/= =	-/-			
EY FEATURES					
omeConnect		-	-	_	-
tiveClean oven cleaning	-	-	-	-	-
astingSensor Plus	-	-	-	-	-
akingSensor Plus	_	-		_	-
polStart		-	-	_	-
utomatic programmes	_	14	7	30	15
okControl Plus ftMove door opening and closing	-	-	<u> </u>	-	-
EATURES					_
ack / roof / side ecoClean® Direct liners		-	-	■/-/-	-
coClean® setting	=	-	-		-
iterior lights halogen	-	-	-	-	-
eiling integrated LED			Side	1 x 2W LED	1 x 2W LED
andard internal light	-	-	-	-	-
ght on/off when oven door opened/closed		•			-
mooth enamelled oven interior	-	<u> </u>	Stainless steel	Stainless steel	Stainless steel
ull glass inner door	Triple	Triple	Double	- Triple	- Triple
oor glazing umber of shelf positions	Triple 3	Triple 3	Double	Triple 5	Triple High/low racks
ectronic clock timer	3				Highliow racks
lain on/off switch		-			-
oor lock	-	-	-		-
ater tank empty indicator	-	-	-	-	-
ROGRAMMES / FUNCTIONS					
otairGentle		-	-	-	-
D hotAir cooking			-		-
otAir cooking licrowave	-	-	-		-
lumber of microwave combination options	5	2	<u> </u>	Multiple	2
oolStart		_		- iwattiple	
efrosting	-	-	-	_	-
ull width surface grill			-	Quartz	
entre surface grill		•	-	-	-
ot air grilling	•	•		•	
izza setting		-		-	-
onventional	-	-	-	-	-
onventional Gentle Itensive heat	-	-		_	_
ottom heat	-	_			
eep warm / Plate warming		-/		_	_
ow temperature cooking		-	_	_	_
rying	-	-	-	_	-
ast pre-heating function		•	-		
DDITIONAL FUNCTIONS WITH STEAM					
llSteam	-	-	-	-	-
ulseSteam	-	-	<u> </u>		-
IdedSteam Imper of pulseSteam combination options	-	-	<u>-</u>	Multiple	-
ough proving	-	_		- Multiple	
Pheating	-	-	-	-	-
eaning & Descaling programme	-	-	-	•	-
ERFORMANCE / TECHNICAL INFORMATION					
stallation in base unit / tall housing	<b>■</b> / <b>■</b>	<b>I</b> / <b>I</b>	<b>=</b> / <b>=</b>	<b>■/</b> ■	<b>I</b> / <b>I</b>
avity dimensions H x W x D (mm)	237 x 480 x 392	237 x 480 x 392	242 x 430 x 345	236 x 432 x 350	250 x 420 x 420
ven capacity (litres)	45 _	45	36	36	44
ater tank capacity (litres) verter technology <sup>3</sup>	-	-		0.80	-
aximum Microwave power (W)	900	900	900	1000	900
umber of Microwave power levels	5	5	5	5	5
nergy efficiency class <sup>1,2</sup>	-	-	-	-	-
ficiency declared on	-	-	-	-	-
nergy consumption 4D hotAir (kWh)	-	-	-	-	-
nergy consumption conventional (kWh)	-	-	-	-	-
me to cook standard load (mins)	-	-	-	-	-
argest baking sheet area (cm)	1290	1290	1290	220.240	220.240
ominal voltage (volts)	220-240	220-240	220-240	220-240	220-240
tal connected loading (W)	3600 150	3600 150	1220	3100 150	3350 180
	150	150	150	150	180
able length (cm)				ĜI :	-
able length (cm) TANDARD ACCESSORIES	1	1	Glass nan	Glass trav	
pble length (cm) FANDARD ACCESSORIES Ill width enamelled pan	1 -	1 –	Glass pan	Glass tray	-
ble length (cm) ANDARD ACCESSORIES Ill width enamelled pan n insert grid					-
able length (cm) AINDARD ACCESSORIES ill width enamelled pan in insert grid ire shelves gh / low grid	-	-	-	1 - 1	
bble length (cm) ANDARD ACCESSORIES Ill width enamelled pan in insert grid ire shelves	- 1	_ 1	<u>-</u> -	1 -	-

<sup>■</sup> Yes, model has this feature. 
- Feature not available for this model

¹Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation). ²A+++ = more efficient, D = less efficient. ³For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

# Coffee centre specifications

APPLIANCE TYPE	COFFEE CENTRE
Design family	<b>i</b> Q700
Model number	Black glass with steel trim CT636LES6
DESIGN CHARACTERISTICS	
Stainless steel navigation control dial	
TFT touchDisplay	•
Partial colour graphic display	•
Left hinged door to access interior	•
KEY FEATURES	
Electronic control	
sensoFlow system	•
Aroma pressure system	•
Auto valve system	
aromaDoubleShot	•
Automatic steam blast milk cleaning function	
oneTouch preparation	-
FEATURES	
Main on/off switch	
Bean container / ground coffee container	
Container empty warning indicators for water / beans	
Cleaning / descaling / filter warning indicators	
Ceramic coffee grinders	
Multilevel grinding setting	
Cup illumination	-
Height adjustable coffee outlet (mm)	7-15
Height adjustable milk nozzle (mm)	7-15
Removable, insulated milk container	7.13
Removable water tank	
Adjustable automatic switch off setting	
Integrated water filter	
Removable spillage collection tray	
Removable used coffee grounds collection container	
PROGRAMMES / FUNCTIONS	
myCoffee – personalised beverage settings	1 or 2 cup
Milk foam	1 or 2 cup
Hot water	1 or 2 cup
Warm milk	1 or 2 cup
Ristretto	1 or 2 cup
Coffee	1 or 2 cup
Espresso	1 or 2 cup
Cappuccino	1 or 2 cup
Latte Macchiato	1 or 2 cup
Caffe latte	1 or 2 cup
Espresso Macchiato	1 or 2 cup
One touch function for milk drinks	1 or 2 cup
Coffee temperature options	3
Hot water temperature options	4
Milk foam/frothing function	<u>+</u>
Warm milk function	
Cleaning / descaling / programmes	
cleaning / descaling / programmes	■ / ■
	= /=
Automatic rinse when switched on/off	<b>I</b> /I
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION	
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm)	950-1450
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing	950-1450
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g)	950-1450 ■ 8-12
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g)	950-1450  8-12  500
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container	950-1450  8-12  500
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container Water tank capacity (litres)	950-1450  8-12  500  2.4
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container Water tank capacity (litres) Total connected laoding (kW)	950-1450  8-12  500  2.4  1.6
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container Water tank capacity (litres) Total connected laoding (kW) Cable length (cm)	950-1450  8-12  500  2.4
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container Water tank capacity (litres) Total connected laoding (kW) Cable length (cm) STANDARD ACCESSORIES	950-1450  8-12  500  2.4  1.6  170
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container Water tank capacity (litres) Total connected laoding (kW) Cable length (cm) STANDARD ACCESSORIES Insulated milk container capacity (litres)	950-1450  8-12  500  2.4  1.6  170  0.5
Automatic rinse when switched on/off PERFORMANCE / TECHNICAL INFORMATION Recommended installation height (mm) Installation in a tall housing Brewing chamber volume (g) Bean container capacity (g) Ground coffee container Water tank capacity (litres) Total connected laoding (kW) Cable length (cm) STANDARD ACCESSORIES	950-1450  8-12  500  2.4  1.6  170

# Microwave specifications

APPLIANCE TYPE	MICROWAVE W		MICROWAVE	MICROWAVE
Design family	iQ 700		iQ 500	iQ 500
	glass with steel trim BE634LGS	1B BF634LGS1B	BF555LMS0B	BF525LMS0B
DESIGN CHARACTERISTICS				
Stainless steel navigation control dial			_	-
TFT Display			_	-
Touch control			touchSlider	touchSlider
Side opening door				
Control panel position	Below, horiz	ontal Below, horizontal	Right, vertical	Right, vertical
CONTROLS				
Electronic control				
Automatic programmes	10	7	7	7
Safety switch off	-	-		
PROGRAMMES / FUNCTIONS				
Microwave				
Quartz grill		-	-	-
Microwave / grill combination		-	-	-
FEATURES				
Installation in wall unit / tall housing	■/■	■/■	- / <b>■</b>	■/■
Full width frameless design				
Electronic clock				
ClearText Display			LED display	LED display
Full glass inner door			-	_
Glazed door (quadruple / triple / double)	Double	Double	-	-
Memory settings	-	-	1	1
Maximum cooking time duration (mins)	90	90	99	99
Electronic door opening				
Hinge	Left	Left	Left	Left
Internal light	1 x 2W LE	D 1 x 2W LED	1 x 3W LED	1 x 3W LED
Stainless steel interior				
PERFORMANCE / TECHNICAL INFORMATION	·			
Cavity dimensions H x W x D (mm)	220 x 350 x	270 220 x 350 x 270	208 x 328 x 369	201 x 308 x 282
Oven capacity (litres)	21	21	25	20
Inverter technology <sup>1</sup>		•	-	_
Maximum microwave power (W)	900	900	900	800
Number of microwave power levels	5	5	5	5
Mircrowave distrbution	Stirrer	Stirrer	Turntable	Turntable
Turntable diameter (mm)	_	-	315	255
Total connected load (kW)	1.99	1.22	1.45	1.27
Cable length (cm)	150	150	130	130
GB plug				
STANDARD ACCESSORIES				
Glass pan	1	-	-	-
Insert grid	1	_	_	_

# Warming and accessory drawer specifications

•		•		
APPLIANCE TYPE			WARMING DRAWERS	
Design family		iQ 700	iQ 700	iQ 500
Model number	Black glass with steel trim	BI630DNS1B	BI630CNS1B	BI510CNR0B
DESIGN CHARACTERISTICS				
Warming drawer				
Accessory drawer		-	-	-
PROGRAMMES / FUNCTIONS				
Plate warming				
Hold warm		•	•	
Defrost		•	•	
ow temperature cooking		•		_
FEATURES				
Operating indicator light				
Electronic control		•		_
Rotary temperature control dial				
Touch control		-	-	_
Number of temperature settings		4	4	3
Maximum temperature (C°)		80	80	80
Minimum temperature (C°)		40	40	40
Maximum capacity – plates		40	12	14
Maximum capacity – espresso cups		192	64	64
Toughened glass base				Anti-slip mat
PERFORMANCE / TECHNICAL INFORM	MATION			
nstall independently				
nstall with compact appliance		iQ700	iQ700	iQ500
nstall with a single oven		iQ700	iQ700	iQ500
ush-pull opening mechanism		•	•	
Cavity dimensions H x W x D (mm)		242 x 468 x 458	92 x 468 x 458	100 x 475 x 490
Prawer interior volume (litres)		52	20	23
nstallation in a tall housing		•		
nstallation under work surface		•	•	
Maximum weight capacity (kg)		25	25	15
Total connected loading (kW)		0.81	0.81	0.40
Cable length (cm)		150	150	150
GB plug				

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

<sup>&</sup>lt;sup>1</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

# Optional accessories for ovens and compact appliances

		ic	2700	iQ500			
	'	Single ovens	45cm compact ovens	Single ovens	Compact ovens	Double ovens*	
	ROASTING & BAKING ACCESSORIES						
HZ634000	Full width wire shelf for iQ700 and iQ500 ovens and iQ700 compacts	•	•	•	-	•	
HZ664000	Full width wire shelf for iQ700 ovens and compacts with fullSteam function	•	•	-	-	-	
HZ631070	Colour coordinated full width enamelled baking tray for iQ700 ovens and compact ovens	•	-	-	-	-	
HZ531000	Colour coordinated full width enamelled baking tray for iQ500 ovens	-	-	•	-	•	
HZ631010	Colour coordinated full width baking tray with non-stick coating for iQ700 ovens and compacts	•	•	-	-	-	
HZ531010	Colour coordinated full width baking tray with non-stick coating for iQ500 ovens	-	-	•	-	•	
HZ634080	Full width wire shelf for iQ700 ovens and compacts with integral microwave	•	•	_	-	-	
HZ625071	Two-piece enamelled anti-splash pan insert for iQ700 ovens and compact ovens and iQ500 ovens	•	•	•	-	•	
HZ636000	Full width glass tray for iQ1700 ovens and compact ovens and iQ500 ovens	•	•	•	-	•	
HZ86S000	Glass serving dish – approx 40 x 25cm – for iQ700 ovens and compact ovens and iQ500 ovens	•	•	•	-	•	
HZ915003	5.4L capacity oval glass casserole dish with lid for iQ700 ovens and compact ovens and iQ500 ovens	•	•	•	-	•	
	TELESCOPIC RAILS						
HZ638100	1 level telescopic shelf rails with stop, fully extendable, for iQ700 ovens	•	-	-	-	-	
HZ538000	1 pair of level independent varioClip telescopic rails for iQ500 single and double ovens	-	-	•	-	•	
HZ638170	1 level telescopic shelf rails with stop, fully extendable, for iQ700 ovens with pyrolytic cleaning	•	-	-	-	-	
HZ638D10	1 level telescopic shelf rails with stop, fully extendable, for iQ700 ovens with fullSteam function	•	-	-	-	-	
HZ638300	3 level telescopic shelf rails with stop, fully extendable for iQ700 and iQ500 single and double ovens	•	-	•	-	•	
HZ638370	3 level telescopic shelf rails with stop, fully extendable for iQ700 ovens with pyrolytic cleaning	•	-	-	-	_	
HZ638D30	3 level telescopic shelf rails with stop, fully extendable for iQ700 ovens with fullSteam function	•	-	_	-	_	
HZ638178	1 level telescopic shelf rails with stop, fully extendable for iQ700 compact ovens with pyrolytic cleaning	-	•	_	-	-	
HZ638D18	1 level telescopic shelf rails with stop, fully extendable for 45cm compact ovens with fullSteam function	-	•	-	-	-	
	INSTALLATION ACCESSORIES						
HZ6BMA00	Metal platform and brackets suited to combinations of iQ700 60cm single ovens and 45cm compact ovens in column (special single aperture required)	•	-	-	-	-	
HZ66X600	Cosmetic decor strip for use between 60cm single and 45cm compact ovens	•	-	-	•	-	


<sup>■</sup> Yes, model has this feature. 
- Feature not available for this model.


\*Main cavity only


Please note: optional accessories are not suited for use during pyrolytic cleaning unless stated

## Oven technical diagrams


**Single ovens** HN678GES6B, HM678G4S6B, HM676G0S6B, HR678GES6B, HR676GBS6B, HB678GBS6B, HB676GBS6B, HB672GBS1B, HS658GES6B, HM656GNS6B, HB656GBS6B and HB632GBS1B










### Single ovens HB578A0S0B and HB535A0S0B








### Double ovens MB557G5S0B and MB535A0S0B



### Built-under double ovens NB557ABS0B and NB535ABS0B





If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min, worktop thickness						
	fitted	flush					
Induction hob	39 mm	40 mm					
Full surface induction hob	49 mm	50 mm					
Gas hob	29 mm	36 mm					
Electric hob	29 mm	32 mm					


# Compact appliance technical diagrams

Compact ovens, compact steamers and compact microwave ovens CB675GBS1B, CS658GRS6B, CS656GBS6B, CD634GBS1B, CM678G4S6B, CM676GBS6B, CM656GBS6B and CM633GBS1B






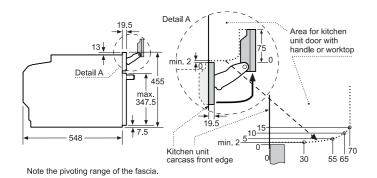





Installation with a hob.


### Microwave oven CF634AGS1B










### Coffee centre CT636LES6










### Compact microwave combination with steam CP565AGS0B

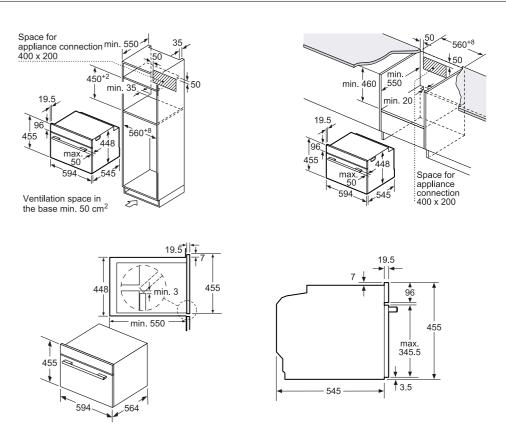

### Compact microwave combination CM585AMS0B







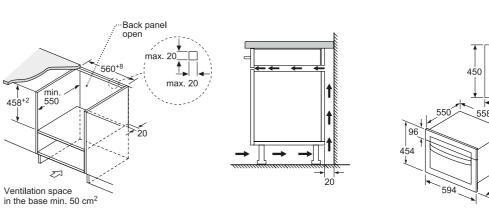


# Microwave oven technical diagrams


Microwaves BE634LGS1B and BF634LGS1B










### Microwave BF555LMS0B







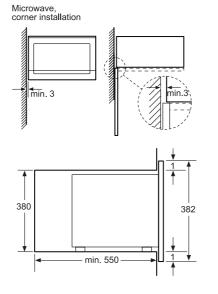


### Microwave BF525LMS0B









### Warming drawers BI630DNS1B and BI630CNS1B






Ovens with an appliance height of 595 mm can be installed above a warming drawer.


An intermediate floor is not required.



Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

### Warming drawer BI510CNR0B





Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

Hobs | Specifications | Hobs

## Venting hob specifications

APPLIANCE TYPE	VENTING HOBS							
Design family Model number	<b>iQ700</b> EX875LX34E	iQ 500 ED851FS11E						
DESIGN	EXO/SEXS/1E	2003113112						
Width (mm)	812	802						
Control type	Front Dual lightSlider	Front						
Style	Stainless steel trim	touchSlider 3 sided bevel edge						
KEY FEATURES	Stalliness steer tillin	5 sided bever edge						
Integrated downdraft extractor	•	•						
Fully automatic extraction via air quality sensor								
cookingSensor ready¹	HZ39050 required							
Wireless sensor settings for hob fryingSensor Plus	5 settings 5 settings							
Number of flexInduction zones	2	_						
Digital display		•						
HOB FEATURES								
Number of individual zones Power levels	17	<u>4</u> 17						
powerBoost	17							
panBoost		-						
powerMove Plus	3 stages	2 stages						
Automatic setting transfer								
Energy consumption display								
Timer with automatic switch off for each zone Count up timer	-							
quickStart	-	•						
reStart		•						
Keep warm function	•							
Wipe protection function	-							
Can be combined with other models with comfort profile HOOD FEATURES								
climateControl sensor								
Ducted operation using accessory kit	HZ381401	HZ381401						
Recirculating operation using accessory kits	HZ381501	HZ381501						
Metal grease filter	9							
Power levels Intensive setting	1	9						
Automatic intensive revert setting	6 minutes	6 minutes						
Automatic or manual control		o minutes						
Automatic after running	6 minutes	6 minutes						
Interval operation		-						
Dishwasher safe cast iron air inlet grid / standing area  Dishwasher safe filter cassette with spillage collection	200ml capacity	200ml capacity						
Dishwasher spillage overflow collector	2L capacity	2L capacity						
Electronic grease filter / cleanAir filter saturation indicators	■/■	■/■						
SAFETY FEATURES								
Main on/off switch Two stage residual heat indicators	-							
Safety lock	-	i						
Automatic pan recognition								
Timed safety switch off								
PERFORMANCE / TECHNICAL INFORMATION – HOB								
Nominal voltage (V)	220-240 7,400	220-240 7,400						
Maximum power output (W) Electrical cable length (cm)	120	120						
Rear left flexInduction zone – power (kW) / dimensions (mm)	2.20 200 x 240	2.20 210 x 210						
Rear right flexInduction zone – power (kW) / dimensions (mm)	2.20 200 x 240	1.40 145 x 145						
Front left flexInduction zone – power (kW) / dimensions (mm)	2.20 200 x 240	2.20 210 x 210						
Front right flexInduction zone – power (kW) / dimensions (mm)	2.20 200 x 240	1.80 180 x 180						
flexInduction zone left – power (kW) / dimensions (mm) flexInduction zone right – power (kW) / dimensions (mm)	3.30 400 x 240 3.30 400 x 240	3.60 439 x 210						
Rear left zone – with powerBoost (max. kW)	3.70	3.70						
Rear right zone – with powerBoost (max. kW)	3.70	2.20						
Front left zone – with powerBoost (max. kW)	3.70	3.70						
Front right zone – with powerBoost (max. kW)	3.70	3.10						
PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR Extractor Energy Efficiency Rating	A	A						
Extraction rate in m³/h (2,3)	^	^						
ducted / recirculating power level Minimum	350 / 300	350 / 300						
ducted / recirculating power level Maximum	530 / 480	530 / 480						
ducted / recirculating power level Intensive	690 / 600	690 / 600						
Max noise level (sound pressure) based on dB(A) re 20 μPa <sup>(2,4)</sup> - ducted / recirculating power level Minimum	46 / 42	46 / 42						
ducted / recirculating power level Maximum	54 / 55	54 / 55						
ducted / recirculating power level Intensive	63 / 64	63 / 64						
Noise level (sound power) based on dB(A) re 1pW (2,5)								
ducted / recirculating power level Minimum	58 / 54	58 / 54						
ducted / recirculating power level Intensive	66   67 75   75	66 I 67 75 I 75						
ducted / recirculating power level Intensive  Motor power (W)	75 / 75 170	75 / 75 170						
VICIOI DOVVET LVVI	170	170						
		HZ39050						
OPTIONAL ACCESSORIES	HZ39050	HZ390042						
OPTIONAL ACCESSORIES Wireless temperature sensor	HZ39050 HZ390042	HZ390042						
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm)	HZ390042 HZ390011	HZ390011						
OPTIONAL ACCESSORIES  Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Sectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan	HZ390042 HZ390011 HZ390012	HZ390011 HZ390012						
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan Teppan Yaki (approx. 300 x 200mm)	HZ390042 HZ390011 HZ390012 HZ390511	HZ390011 HZ390012 HZ390511						
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan Teppan Yaki (approx. 300 x 200mm) Teppan Yaki (approx. 400 x 200mm)	HZ390042 HZ390011 HZ390012 HZ390511 HZ390512	HZ390011 HZ390012						
OPTIONAL ACCESSORIES  Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan Teppan Yaki (approx. 300 x 200mm) Teppan Yaki (approx. 400 x 200mm) Griddle plate (approx. 400 x 200mm) CleanAir recirculating kit	HZ390042 HZ390011 HZ390012 HZ390511	HZ390011 HZ390012 HZ390511						

<sup>■</sup> Yes, model has this feature.

- Feature not available for this model.

All models comply with COMMISSION (EC)

No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup> Max 3 sensors at any time; one WSP provided.

# flexInduction hob specifications

APPLIANCE TYPE Design family		10/700		iQ700		FLEXINDUCTION HOBS		iQ700		FO 700		iQ 700	
Design family  Model number		<b>iQ700</b> EX975KXW1E		5LXC1E		KYW1E		JYW1E	iQ700 EX975LVV1E		<b>iQ700</b> EX675LXV1E		
DESIGN	EX97	JKAWTE	EAST	JEACTE	EX673	OKTWIE	EX07.	DUTWIE	EX97	JEVV IE	EX07	JLAVIE	
Width (mm)		912		12	8	12	6	12	9	912	602		
Control position		ront	Front		Fr	ont	Fr	ont	Front		Front		
Control type		chControl		ghtSlider		chControl		chControl	Dual lightSlider		Dual lightSlider		
Style	Stainless s	Stainless steel side trim		teel side trim	Stainless steel side trim		Stainless steel side trim		Stainless s	teel side trim	Stainless s	teel side trim	
KEY FEATURES HomeConnect		_		_		_		_				_	
cookConnect		:						:		-			
5" Full TFT touchDisplay		-		-		-		-		-			
3.5" Full TFT touchDisplay		-	_		-					-		-	
Dish categories							-			-		-	
cookingSensor Plus <sup>1</sup>	Re	eady	Re	eady	Re	ady	Ready			-		-	
Wireless sensor settings	5 se	ettings	5 se	ttings	5 se	ttings	5 settings			-		-	
fryingSensor Plus	5 se	ettings	5 se	ttings		ttings		ttings	4 se	ettings	4 se	ettings	
Number of flexInduction zones		3		3		2		2		2		2	
Extended flexInduction zone <sup>2</sup>		_				2		1					
Number of combiZones powerBoost		-								-			
panBoost		:		-				-		:		•	
powerMove Plus	3 9	tages	3 9	tages		tages		tages		tages	3 9	tages	
Automatic setting transfer	33	■	3,	■		■		.ages	J 3	■ Lages	3,	■ Luges	
Energy consumption display		•		_		_		•		•		•	
'Plug & Play' 13A connection		-		-		-				-		-	
FEATURES													
Number of individual zones		5		5		4		4		5		4	
Power levels		17		17		17		17		17	17		
Digital display													
Timer with automatic switch off for each zone		•			-								
Count up timer					•		-		•		_		
quickStart reStart		-			-				-		-		
Keep warm function		:						-		-			
Wipe protection function		-		-		-				-			
SAFETY FEATURES													
Main on/off switch													
Two stage residual heat indicators (H/h)							•						
Safety lock											•		
Automatic pan recognition					•						•		
Timed safety switch off													
PERFORMANCE / TECHNICAL INFORMATION Nominal voltage (V)	22	0-240	22/	240	220	)-240	220-240		220-240		220-240		
Maximum power output (W)		,100	220-240 11,100		7,400		7,400		11,100			,400	
Electrical cable length (cm)		110	110		110		110		110			110	
GB plug		_		_		_		_		_		_	
Rear left flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 240	2.20	200 x 230	2.20	200 x 230	2.20	200 x 240	2.20	200 x 240	
Rear left zone – power (kW) / diameter (mm)	-	-	-	-	-	-	-	-	-	-	-	-	
Rear right flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 240	2.20	200 x 230	2.20	200 x 230	2.20	200 x 240	2.20	200 x 240	
Rear right zone – power (kW) / diameter (mm)	-	-	-	-	-	-	-	-	-	-	-	-	
Rear centre zone – power (kW) / diameter (mm)	2.60	300 x 240	2.60	300 x 240	-	-	-	-	3.30	300 x 240	-	-	
Front centre zone – power (kW) / diameter (mm)	-	-	-	-	-	-	-	-	-	-	-	-	
Front left flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 240	2.20	200 x 230	2.20	200 x 230	2.20	200 x 240	2.20	200 x 240	
Front left zone – power (kW) / diameter (mm) Front right flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 240	2.20	200 x 230	2.20	200 x 230	2.20	200 x 240	2.20	200 x 240	
Front right zone – power (kW) / diameter (mm)	-	200 X 240	-		-	- Z00 X Z30	-	- 200 X 230	-	200 X 240	-		
flexInduction zone left – power (kW) / dimensions (mm)	3.30	400 x 240	3.30	400 x 240	3.30	400 x 230	3.30	400 x 230	3.30	400 x 240	3.30	400 x 240	
flexInduction zone right – power (kW) / dimensions (mm)	3.30	400 x 240	3.30	400 x 240	3.30	400 x 230	3.30	400 x 230	3.30	400 x 240	3.30	400 x 240	
Extended flexInduction rear left – power (kW) / dimensions (mm)	-	-	-	-	3.30	300 x 300	3.30	300 x 300	-	-	-	-	
Extended flexInduction rear right – power (kW) / dimensions (mm)	-	-	-	-	3.30	300 x 300	3.30	300 x 300	-	-	-	-	
combiZone left – power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-	-	-	-	-	
combiZone right – power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-	-	-	-	-	
Rear left zone – with powerBoost (max. kW)		3.70		.70		.70		.70		3.70		3.70	
Rear right zone – with powerBoost (max. kW)	3.70			3.70 3.70		3.70		3.70		3.70			
Rear centre zone – with powerBoost (max. kW)	3.70		3.70 –			-		3.70		-			
Front centre zone – with powerBoost (max. kW)					3.70 3.70		3 70		3.70				
Front right zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)	ight zone – with powerBoost (max. kW) 3.70 ight zone – with powerBoost (max. kW) 3.70		3.70 3.70			3.70 3.70		3.70		3.70			
OPTIONAL ACCESSORIES	5./0			3./U 3		5./0		3./0		3.70			
Wireless temperature sensor	H7	39050	H73	39050	HZ3	9050	HZ39050		_		-		
Set of four pans (3 x pans, 1 x sauté pan)		90042		90042		90042	HZ390042		HZ390042		HZ3	90042	
Rectagular roasting pan with lid (approx. 320 x 200mm)		90011		90011		90011	HZ390042			90011	HZ390042		
Steamer pan insert of use with HEZ390011 roasting pan	HZ3	90012	HZ3	90012	HZ39	90012	HZ390012		HZ390012		HZ3	90012	
Teppan Yaki (approx. 300 x 200mm)		90512	HZ3	90512		90512	HZ390512		HZ390512		HZ390512		
Teppan Yaki (approx. 400 x 200mm) HZ390511		HZ3	90511	HZ390511		HZ390511		HZ390511		HZ390511			
Griddle plate (approx. 400 x 200mm)		90522		90522		90522		90522		90522		90522	

Yes, model has this feature. 
- Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at a y time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

<sup>&</sup>lt;sup>2</sup> Air flow and noise declarations made in line with CECED code Of Conduct.

<sup>3</sup> Measured according to EN61591 on largest pipe diameter.

<sup>4</sup> Sound pressure measured according to EN60704–2–13 on largest pipe diameter.

<sup>5</sup> Sound power measured according to EN60704–3 on largest pipe diameter.

Hobs | Specifications Specifications | Hobs

# flexInduction hob specifications

APPLIANCE TYPE Design family	To to	700	io	700	TO.	FLEXINDUC 700		700	io	700	[ic	700
Model number		5FXB1E		9FVC1E		9FEC1E		IFVC1E		IFEC1E		5BEB1E
DESIGN												
Width (mm)	9	912	8	12	6	602	8	12	6	02	8	312
Control position	Fr	ront	Fr	ont	Fr	ront	Fr	ont	Fr	ont	Fr	ront
Control type	toucl	hSlider	touch	nSlider	touch	hSlider	touch	nSlider	touch	nSlider	TFT tou	chControl
Style	Stainless st	teel side trim	Stainless st	eel side trim	Stainless st	teel side trim	Stainless st	eel side trim	Stainless st	eel side trim	Stainless s	teel side trir
KEY FEATURES												
HomeConnect		-		-		-		-		-		-
cookConnect						-						_
5" Full TFT touchDisplay  3.5" Full TFT touchDisplay				-		_		-				
Dish categories										- -		
cookingSensor Plus <sup>1</sup>								_				_
Wireless sensor settings				_								_
fryingSensor Plus		_	4 se	ttings	5 se	ttings	4 se	ttings	5 se	ttings		-
Number of flexInduction zones		2		1		1		1		1		1
Extended flexInduction zone <sup>2</sup>		-		-		_		-		-		-
Number of combiZones		-		-		-		-		-		-
powerBoost							1		1			
panBoost						•			ı			
powerMove Plus		-	3 st	ages	3 st	tages	3 st	ages	3 st	ages		-
Automatic setting transfer		•								-		_
Energy consumption display		•				•						
'Plug & Play' 13A connection		-		-		-		-		-		-
FEATURES  Number of individual zones		4		5		4		5		4		4
Power levels		17		ס 17		17		17		17		17
Digital display		<b>1</b> 7		T				· ·		<u>'</u>		•
Timer with automatic switch off for each zone		-				-						-
Count up timer		•				•						_
quickStart		-			1	•			1	•		-
reStart												-
Keep warm function					I		ı		ı			
Wipe protection function												-
SAFETY FEATURES												
Main on/off switch		•				•						
Two stage residual heat indicators (H/h)		•				-						
Safety lock		-				-				-		•
Automatic pan recognition		-				-				-		-
Timed safety switch off PERFORMANCE / TECHNICAL INFORMATION												_
Nominal voltage (V)	220	0-240	220	)-240	220	0-240	220	1-240	220	-240	220	0-240
Maximum power output (W)		400	_	400		400		400		400		,400
Electrical cable length (cm)		110		10		10	-	10		10		110
GB plug		-		_		-		_		-		-
Rear left flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	-	-	2.20	190 x 240	-	-	2.20	190 x 240	2.20	200 x 24
Rear left zone – power (kW) / diameter (mm)	-	-	1.40	145	-	-	1.40	145	-	-	-	-
Rear right flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 210	-	-	2.20	200 x 210	-	-	-	-
Rear right zone – power (kW) / diameter (mm)	-	-	-	-	1.40	145	-	-	1.40	145	-	-
Rear centre zone – power (kW) / diameter (mm)	-	-	2.20	240	-	-	2.20	240	-	-	3.30	280 x 28
Front centre zone – power (kW) / diameter (mm)	-	-	-	-	-	-	-	-	-	-	-	-
Front left flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	-	-	2.20	190 x 240	- 1.00	100	2.20	190 x 240	2.20	200 x 24
Front left zone – power (kW) / diameter (mm)	2 20	200 x 240	1.80	180	-	-	1.80	180	-	-	-	-
Front right flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 210	2.20	210	2.20	200 x 210	2.20	210	1.40	1/5 v 1/
Front right zone – power (kW) / diameter (mm)  flexInduction zone left – power (kW) / dimensions (mm)	3.30	- 400 x 240	-	_	3.30	210 380 x 240		_	3.30	380 x 240	1.40	145 x 14
flexInduction zone right – power (kW) / dimensions (mm) flexInduction zone right – power (kW) / dimensions (mm)	3.30	400 x 240 400 x 240	3.30	400 x 210	5.50	360 X 240	3.30	400 x 210	-	- 300 X 240	_	+ -
Extended flexInduction rear left – power (kW) / dimensions (mm)	5.50	400 X 240	-	400 X 210	_	_	-	400 X 210	_	_	_	_
Extended flexInduction rear right – power (kW) / dimensions (mm)	_		_	_	_	_	_	_	_	_	_	_
combiZone left – power (kW) / dimensions (mm)	-	-	-	_	-	-	-	-	-	-	-	-
combiZone right – power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-	-	-	-	-
Rear left zone – with powerBoost (max. kW)	3	.70	2	.20	3.	.70	2.	.20	3.	.70	3	3.70
Rear right zone – with powerBoost (max. kW)		.70		.70		.20		.70	2.	.20		-
Rear centre zone – with powerBoost (max. kW)		-	3.	.70		-	3.	.70		-	3	3.70
Front centre zone – with powerBoost (max. kW)		-				-				-		-
Front left zone – with powerBoost (max. kW)		.70	3.	.10		.70		.10		.70	3	3.70
	3	.70	3.	.70	3.	.70	3.	.70	3.	.70	2	2.20
Front right zone – with powerBoost (max. kW)												
Front right zone – with powerBoost (max. kW) OPTIONAL ACCESSORIES						_		_		_		-
OPTIONAL ACCESSORIES Wireless temperature sensor		-		-								
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan)	HZ3	90042	HZ39	90042	HZ39	90042	HZ39	90042	HZ39	90042	HZ3	90042
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm)	HZ3!	90042 90011	HZ39	90042	HZ39	90042 90011	HZ39	90042	HZ39	90042	HZ3	90011
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan	HZ31 HZ31 HZ31	90042 90011 90012	HZ39 HZ39 HZ39	90042 90011 90012	HZ39 HZ39 HZ39	90042 90011 90012	HZ39 HZ39 HZ39	90042 90011 90012	HZ39 HZ39 HZ39	90042 90011 90012	HZ3 HZ3 HZ3	90011 90012
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan Teppan Yaki (approx. 300 x 200mm)	HZ3! HZ3! HZ3!	90042 90011 90012 90512	HZ39 HZ39 HZ39	90042 90011 90012 90512	HZ39 HZ39 HZ39	90042 90011 90012 90512	HZ39 HZ39 HZ39	90042 90011 90012 90512	HZ39 HZ39 HZ39	90042 90011 90012 90512	HZ3 HZ3 HZ3 HZ3	90011 90012 90512
OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectagular roasting pan with lid (approx. 320 x 200mm) Steamer pan insert of use with HEZ390011 roasting pan	HZ31 HZ31 HZ31 HZ31	90042 90011 90012	HZ39 HZ39 HZ39 HZ39	90042 90011 90012	HZ39 HZ39 HZ39 HZ39	90042 90011 90012	HZ39 HZ39 HZ39 HZ39	90042 90011 90012	HZ39 HZ39 HZ39 HZ39	90042 90011 90012	HZ3 HZ3 HZ3 HZ3 HZ3	90011 90012

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at a y time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

# flexInduction & induction hob specifications

APPLIANCE TYPE Design family	iO	FLEXINDUC 700		700	iQ	700	iC	500	ON HOBS	500	iQ	300
Model number		5BEB1E		1BEB1E		5LVC1E		IFWB1E		1FSB1E	EH801	
DESIGN												
Width (mm)		512	5	92		12		02		02		92
Control position		ront		ont		ont		ont		ont		ont
Control type		hSlider		hSlider		htSlider		nSlider		hSlider		Slider
Style	Stainless st	teel side trim	Stainless st	eel side trim	Stainless st	eel side trim	Front	t bevel	Fron	t bevel	Flus	sh fit
KEY FEATURES												
HomeConnect		-		-		-		-		-	-	
cookConnect		-		-		-		-		-		
5" Full TFT touchDisplay		-		-		-		-		-		
3.5" Full TFT touchDisplay		-		-		-		-		-		
Dish categories		-		-		-		-		-		
cookingSensor Plus <sup>1</sup>		-		-		-		-		-		
Wireless sensor settings		-		-		-		-		-		
fryingSensor Plus		-			4 set	ttings		ttings		-		
Number of flexInduction zones		1		1		-		-		-		
Extended flexInduction zone <sup>2</sup>		-		-		-		-		-		
Number of combiZones		-		-		-		1		1		
powerBoost				•								
panBoost						-		-		-		
powerMove Plus		-		-		-		-		tages		_
Automatic setting transfer		-		-		-		_		-	-	
Energy consumption display												
'Plug & Play' 13A connection		-		-		-		-		_	-	
FEATURES								_				
Number of individual zones		4		4		5		5		4		5
Power levels		17		17		7		17		17	1	
Digital display		_		_				_		_		
Timer with automatic switch off for each zone				•								
Count up timer		-				-				-		
quickStart		-		-								
reStart		-		-								
Keep warm function				•		-		-		-		
Wipe protection function		-		-		-		-		-	-	
SAFETY FEATURES												
Main on/off switch				•								
Two stage residual heat indicators (H/h)												
Safety lock												
Automatic pan recognition												
Timed safety switch off												
PERFORMANCE / TECHNICAL INFORMATION												
Nominal voltage (V)		0-240		0-240		-240		)-240		0-240		-240
Maximum power output (W)		400		400		100		400		800		100
Electrical cable length (cm)	1	10		10	1	10		10	1	10		10
GB plug						-		_		-		_
Rear left flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 240	-	-	-	-		-	-	-
Rear left zone – power (kW) / diameter (mm)	-	-	-	-	1.80	180 x 180	1.40	145	2.20	210	1.40	145
Rear right flexInduction zone – power (kW) / dimensions (mm)	-	-	-	- 45	-	-	2.20	200 x 210	-	-	-	-
Rear right zone – power (kW) / diameter (mm)	1.40	145 x 145	1.40	45 x 145	1.40	145 x 145	-	-	1.40	145	1.40	145
Rear centre zone – power (kW) / diameter (mm)	-	-	-	-	-	-	2.20	240	-	-	2.20	240
Front centre zone – power (kW) / diameter (mm)	-	-	-	-	3.30	320 x 320	-	-	-	-	-	-
Front left flexInduction zone – power (kW) / dimensions (mm)	2.20	200 x 240	2.20	200 x 240	-	-	-	-	-	-	-	-
Front left zone – power (kW) / diameter (mm)	-	-	_	-	1.80	180 x 180	1.80	180	2.20	210	1.80	180
Front right flexInduction zone – power (kW) / dimensions (mm)	-	-	-	-	-	-	2.20	200 x 210	-	-	-	-
Front right zone – power (kW) / diameter (mm)	2.20	210 x 210	2.20	210 x 210	2.20	210 x 210	-	-	1.80	180	2.20	210
flexInduction zone left – power (kW) / dimensions (mm)	-	-	-	-	-	-		-		-	-	-
flexInduction zone right – power (kW) / dimensions (mm)	-	-	-	-	-	-	3.30	400 x 210	-	-	-	-
Extended flexInduction rear left – power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-	-	-	-	-
Extended flexInduction rear right – power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-	-	-	-	-
combiZone left – power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-	3.60	439 x 210	-	-
combiZone right – power (kW) / dimensions (mm)	-	_	-	-	-	-	-	-	-	-	-	_
*		.20		.70		-		.20		.70		20
Rear left zone – with powerBoost (max. kW)	3	.70		.70		-		.70	2	.20		20
Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW)		-		-		-		.70		-		70
Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Rear centre zone – with powerBoost (max. kW)				-		-		-		-		-
Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Rear centre zone – with powerBoost (max. kW)		-		.70		-	3.	.10	3	.70		10
Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Rear centre zone – with powerBoost (max. kW) Front centre zone – with powerBoost (max. kW)		.70	3	., 0			3	.70	3	.10	3.	70
Rear left zone – with powerBoost (max. kW)  Rear right zone – with powerBoost (max. kW)  Rear centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)	3			.20				., 0				
Rear left zone – with powerBoost (max. kW)  Rear right zone – with powerBoost (max. kW)  Rear centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)	3	.70				_	,	., 0				_
Rear left zone – with powerBoost (max. kW)  Rear right zone – with powerBoost (max. kW)  Rear centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)  OPTIONAL ACCESSORIES	3 2	.70	2			-		-		-		-
Rear left zone – with powerBoost (max. kW)  Rear right zone – with powerBoost (max. kW)  Rear centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)  Front light zone – with powerBoost (max. kW)  OPTIONAL ACCESSORIES  Wireless temperature sensor	3 2	.70 .20	2	.20						90042		90042
Rear left zone — with powerBoost (max. kW)  Rear right zone — with powerBoost (max. kW)  Rear centre zone — with powerBoost (max. kW)  Front centre zone — with powerBoost (max. kW)  Front left zone — with powerBoost (max. kW)  Front left zone — with powerBoost (max. kW)  OPTIONAL ACCESSORIES  Wireless temperature sensor  Set of four pans (3 x pans, 1 x sauté pan)	3 2 HZ3	.70 .20	HZ3	.20 -	HZ39	-	HZ39	-	HZ3		HZ39	
Rear left zone — with powerBoost (max. kW)  Rear right zone — with powerBoost (max. kW)  Rear centre zone — with powerBoost (max. kW)  Front centre zone — with powerBoost (max. kW)  Front left zone — with powerBoost (max. kW)  Front right zone — with powerBoost (max. kW)  OPTIONAL ACCESSORIES  Wireless temperature sensor  Set of four pans (3 x pans, 1 x sauté pan)  Rectagular roasting pan with lid (approx. 320 x 200mm)	3 2 HZ3 HZ3	.70 .20 - 90042	HZ31	.20 - 90042	HZ39	- 90042	HZ39	- 90042	HZ3	90042	HZ39 -	90042
Rear left zone – with powerBoost (max. kW)  Rear right zone – with powerBoost (max. kW)  Rear centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)  OPTIONAL ACCESSORIES  Wireless temperature sensor  Set of four pans (3 x pans, 1 x sauté pan)  Rectagular roasting pan with lid (approx. 320 x 200mm)  Steamer pan insert of use with HEZ390011 roasting pan  Teppan Yaki (approx. 300 x 200mm)	HZ3 HZ3 HZ3	.70 .20 - 90042 90011	HZ31 HZ31 HZ31	- 90042 90011	HZ39	- 90042	HZ39	- 90042 -	HZ3	90042	HZ39 - -	90042
Rear left zone — with powerBoost (max. kW)  Rear right zone — with powerBoost (max. kW)  Rear centre zone — with powerBoost (max. kW)  Front centre zone — with powerBoost (max. kW)  Front feft zone — with powerBoost (max. kW)  Front right zone — with powerBoost (max. kW)  OPTIONAL ACCESSORIES  Wireless temperature sensor  Set of four pans (3 x pans, 1 x sauté pan)  Rectagular roasting pan with lid (approx. 320 x 200mm)  Steamer pan insert of use with HEZ390011 roasting pan	HZ3 HZ3 HZ3 HZ3	.70 .20 - 90042 90011	HZ31 HZ31 HZ31 HZ31	- 90042 90011 90012	HZ39	- 90042 -	HZ39	- 90042 - -	HZ3¹	90042	HZ39 - - -	90042

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at a y time, "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Hobs | Specifications | Hobs

# Induction hob specifications

APPLIANCE TYPE Design family	iQ	300	iQ	100	iQ		ICTION iQ	100	iQ	100	iQ	100
Model number		1FEB1E	EH845		EH645			FEB1E	EU611		EU631	
DESIGN	Eliloo	ITEDIE	EHOTS	TVDTE	LITOTS	TEDIE	20031	TEDIE	20011	DEDTE	20031	DEI 10
Width (mm)	5	72	79	95	58	33	50	92	59	92	50	92
Control position		ont	Fro		Fro			ont	Fro		Fro	
Control type		Slider	touch		touch			Slider	touchC			Control
Style		sh fit	Steel		Steel			bevel	Fram		Front	
KEY FEATURES	110.	, , , , , , , , , , , , , , , , , , ,	Steel		51001	CHIT	TTOTAL	bever	Train	101033	TIOIL	bever
HomeConnect		_	-									
cookConnect		_				_	l .	_			l .	_
5" Full TFT touchDisplay			_									
3.5" Full TFT touchDisplay			<u> </u>	-				_	_			
Dish categories			_					_				_
cookingSensor Plus <sup>1</sup>						_						
Wireless sensor settings			_			_			_			_
fryingSensor Plus		_						_				
Number of flexInduction zones			<u> </u>	-				_	_			
Extended flexInduction zone <sup>2</sup>		_						_				_
Number of combiZones			_						_			
powerBoost												
panBoost						•		-		•		
powerMove Plus				-				-	-			
Automatic setting transfer		<u>-</u> -										
Energy consumption display		_					<u> </u>	_			<u> </u>	_
'Plug & Play' 13A connection			-					_				_
FEATURES												
Number of individual zones		4		5		4		1	2	1		4
Power levels		<del>1</del> 17	1		1			7	1		1	
Digital display		1/ 				<u>/</u>	1		1			
Timer with automatic switch off for each zone												
Count up timer						-				-		
quickStart					_							_
reStart												
Keep warm function		-	-						-	-		
Wipe protection function		-	-	_					-	-		_
SAFETY FEATURES												
Main on/off switch												
Two stage residual heat indicators (H/h)												
Safety lock												
Automatic pan recognition							_					
Timed safety switch off												
DEDECORAL ANGE / TECHNICAL INFORMATION			_		-	_	_					
PERFORMANCE / TECHNICAL INFORMATION	220											
Nominal voltage (V)		-240	220-	240	220	-240	220	-240	220-	-240	220	-240
Nominal voltage (V) Maximum power output (W)	7,4	1-240 400	220- 7,4	-240	220 7,4	-240 400	220 4,6	-240 500	220- 4,6	-240 500	220	-240 000
Nominal voltage (V) Maximum power output (W) Electrical cable length (cm)	7,4	-240	220- 7,4 11	-240 -00 10	220 7,4	-240	220 4,6	-240 500 10	220-	-240 500	220 3,0	-240 000 10
Nominal voltage (V) Maximum power output (W) Electrical cable length (cm) GB plug	7,4	1-240 400 10	220- 7,4 11	240	220 7,4	-240 100 10	220 4,6	-240 500 10	220- 4,6 11	-240 500	220 3,0 1	-240 000
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)	7,4	1-240 400 10 -	220- 7,4 11 -	-240 -00 10 -	220 7,4 1	-240 100 10 -	220	-240 500 10 -	220- 4,6 11	-240 600 10 -	220 3,0 1'	-240 000 10
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)	7,4 1 - 1.80	1-240 400 10 - - 180	220- 7,4 11 - - 1.40	-240 -000 	220 7, <sup>2</sup> 1' - 1.80	-240 -400 -10 - - - 180	220 4,6 1' -	-240 500 10 - - 180	220- 4,6 11 - - 1.80	-240 500 10 - - 180	220 3,0 1' - 1.80	-240 000 10
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexinduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexinduction zone – power (kW) / dimensions (mm)	7,4 1 - 1.80	1-240 400 10 - 180	220- 7,4 11 - - 1.40	240 00 10 - - 145	220 7,4 11 - 1.80	-240 400 110 - - 180	220 4,6 11 - 1.80	-240 500 110 - - 180	220- 4,6 11 - - 1.80	-240 500 10 - - 180	220 3,0 11 - 1.80	-240 000 10 - 18
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)	7,4 1 - 1.80 - 1.40	1-240 400 10 - - 180 - 145	220- 7,4 11 - 1.40 - 1.40	240 000 10 - - 145 - 145	220 7,4 11 - 1.80 - 1.40	-240 -240 -100 	220 4,6 11 - 1.80 - 1.40	-240 500 10 - - 180 - 145	220- 4,6 11 - 1.80 - 1.40	-240 500 10 - - 180 - 145	220 3,0 11 - 1.80  1.40	-240 000 10 - 18
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)	7,4 1 - 1.80	1-240 400 10 - 180	7,4 11 - - 1.40 - 1.40 2.20	240 00 10 - - 145	220 7,4 11 - 1.80	-240 400 110 - - 180	220 4,6 11 - 1.80	-240 500 110 - - 180	220- 4,6 11 - - 1.80	-240 500 10 - - 180	220 3,0 11 - 1.80  1.40	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)	7,4 1 - 1.80 - 1.40	1-240 400 10 - 180 - 145 -	220- 7,4 11 - 1.40 - 1.40 2.20	-240 -000 	220 7,4 11 - 1.80 - 1.40	-240 400 110 - - 180 - 145 -	220 4,6 1: - 1.80 - 1.40	-240 -200 -10 -180 -145 -145	220- 4,6 11- - 1.80- - 1.40-	-240 	220 3,0 1: - 1.80  1.40	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexInduction zone – power (kW) / diameter (mm)	7,4 1 - 1.80 - 1.40 -	1-240 400 10 - 180 - 145 -	220- 7,4 11 - 1.40 - 1.40 2.20	240 00 00 - 145 - 145 240	220 7,4 1: - 1.80 - 1.40	-240 800 110 - 180 - 145 - -	220 4,6 1: - 1.80 - 1.40	-240 500 110 - 180 - 145 - -	220- 4,6 11- - 1.80- - 1.40- -	-240 500 10 - - 180 - 145 - -	220 3,0 1: - 1.80  1.40	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhiduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhiduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhiduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)	7,4 1 1.80 - 1.40 - -	-240 400 10 - - 180 - 145 - - 180	220- 7,4 111 - 1.40 - 1.40 2.20 - - 1.80		220 7,4 11 - 1.80 - 1.40 - - 1.80	-240 -240 -100 	220 4,6 11 - 1.80 - 1.40 - - 1.80	-240 500 10 - 180 - 145 - - 180	220- 4,6 11 - 1.80 - 1.40 - - 1.80	-240 500 10 - - 180 - 145 - - 180	220 3,0 11 - 1.80 - 1.40 - - 1.80	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front left zone – power (kW) / diameter (mm)	7,4 1 1.80 - 1.40 - 1.80	-240 400 10 - 180 - 145 - - 180 - 180	2200 7,4 111 - - 1.40 - 1.40 2.20 - - 1.80	240 00 10 - 145 - 145 240 - 180	220 7,4 1: - 1.80 - 1.40	-240 -240 	220 4,6 1' - 1.80 - 1.40 - - 1.80	-240 500 110 - 180 - 145 - -	220- 4,6 11- - 1.80- - 1.40- -	-240 500 10 - - 180 - 145 - -	220 3,0 1: - 1.80  1.40	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexinduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexinduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexinduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front left zone – power (kW) / diameter (mm)  Front right flexinduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)	7,4 1 1.80 - 1.40 - -	-240 400 10 - 180 - 145 - - 180 - - 210	220- 7,4 111 - - 1.40 - 1.40 2.20 - - - 1.80 -	240 00 10 - 145 - 145 - 148 - 180 - 210	220 7,4 11 - 1.80 - 1.40 - - 1.80	-240 -240 -100 	220 4,6 11 - 1.80 - 1.40 - - 1.80	-240 500 10 - 180 - 145 - - 180	220- 4,6 11 - 1.80 - 1.40 - - 1.80	-240 500 10 - - 180 - 145 - - 180	220 3,0 11 - 1.80 - 1.40 - - 1.80	-240 000 10 
Nominal voltage (V) Maximum power output (W) Electrical cable length (cm) GB plug	7,4 1 1.80 - 1.40 - 1.80	-240 400 10 - 180 - 145 - - 180 - 180	2200 7,4 111 - - 1.40 - 1.40 2.20 - - 1.80	240 00 10 - 145 - 145 240 - 180	220 7,4 11 - 1.80 - 1.40 - - 1.80	-240 -240 	220 4,6 1' - 1.80 - 1.40 - - 1.80	-240 600 10 - - 180 - - 145 - - - 180	220- 4,6 4,6 11- 11- 1.80 - 1.40 - 1.80 -	-240 600 10 - 180 - 145 - - 180 -	220 3,0 1' - 1.80  1.40 - - 1.80	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexinduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexinduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexinduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front left zone – power (kW) / diameter (mm)  Front right flexinduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)	7,4 1 1.80 - 1.40 - 1.80 - 2.20	-240 400 10 - 180 - 145 - - 180 - - 210	220- 7,4 111 - - 1.40 - 1.40 2.20 - - - 1.80 -	240 00 10 - 145 - 145 - 148 - 180 - 210	220 7,4 1: - 1.80 - 1.40 - - - 1.80 - -	-240 100 100 - 180 - 145 - 180 - 210	220 4,6 1: - 1.80 - 1.40 - - 1.80 - - 2.20	-240 600 10 - 180 - 145 - - 180 - 180 -	220- 4,6 4,6 11 	-240 -200 -100 -180 -145 -180 -180 -210	220 3,6 1: 1.80  1.40 - - 1.80  2.20	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front fleft flexInduction zone – power (kW) / dimensions (mm)  Front left flex nound power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / dimensions (mm)  flexInduction zone left – power (kW) / dimensions (mm)  flexInduction zone right – power (kW) / dimensions (mm)	7,4 1 1.80 - 1.40 1.80 2.20	-240 400 10 - 180 - 145 - 180 - 180 - 210	220- 7,4 11 - - 1.40 - 1.40 2.20 - - - 1.80 -	-240 	220 7,4 1' - 1.80 - 1.40 - - 1.80 - - 2.20	-240 400 100 - 180 - 145 - - 180 - 210	220 4,6 1' - 1.80 - 1.40 - - 1.80 - - 2.20	-240 500 10 - 180 - 145 - 180 - 210	220- 4,6 11 - - 1.80 - 1.40 - - 1.80 - - 2.20 -	-240 600 10 - 180 - 145 - - 180 - 210	220 3,0 1' 1.80  1.40  1.80  2.20	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexinduction zone – power (kW) / dimensions (mm)  Rear right flexinduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front tentre zone – power (kW) / diameter (mm)  Front left flexinduction zone – power (kW) / dimensions (mm)  Front right flexinduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  flexinduction zone left – power (kW) / dimensions (mm)  Extended flexinduction rear left – power (kW) / dimensions (mm)	7,4 1 1.80 - 1.40 1.80 2.20	-240 400 10 - 180 - 145 - - 180 - 210 -	220- 7,4 11 - - 1.40 - 1.40 2.20 - - - 1.80 - 2.20	-240 	220 7,4 1' - 1.80 - 1.40 - - 1.80 - - 2.20	-240 100 10 - 180 - 145 - - 180 - 210 -	220 4,6 1' - 1.80 - 1.40 - - 1.80 - - 2.20	-240 500 10 - 180 - 145 - 180 - 210	220- 4,6 11- - - 1.80 - - 1.40 - - - 1.80 - - -	-240 600 10 - 180 - 145 - - 180 - 210 -	220 3,0 1' 1 1.80  1.40  1.80  2.20	-240 0000 110 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right xone – power (kW) / diameter (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Extended flexhduction zone left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)	7,4 1 1 1.80 - 1.40	-240 400 10 - 180 - 145 - - 180 - 210 -	220- 7,4 11 1.40 - 1.40 1.80 2.20	-240 00 10 - 145 - 145 - 146 - 180 - - -	220 7,4 1 1.80 - 1.80 - 1.80 - 2.20	-240 100 100 - 180 - 145 - 180 - 210 -	220 4,6 11 	-240 500 10 - 180 - 145 - 180 - 180 - - -	220- 4,6 111 1.80 1.40 2.20	-240 600 10 - - 180 - 145 - - 180 - 210 -	220 3,0 11 1.80 1.40 - 1.80 2.20	-240 -240 -240 -300
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhiduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhiduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhiduction zone – power (kW) / dimensions (mm)  Front right flexhiduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right flexhiduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexhiduction zone right – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear right – power (kW) / dimensions (mm)	7,4 1 1 1.80 - 1.40 2.20	-240 400 10 - - 180 - 145 - - 180 - - 180 - - - - - - - - - - - - - - - - - - -	220- 7,4 11 1.40 - 1.40 1.80 2.20	-240 -240 -00 	220 7,4 1 1.80 - 1.80 - 1.80 - 1.80	-240 -240 -100	220 4,6 11 1.80 - 1.40 - - 1.80 - 2.20 - -	-240 -240 -200	220- 4,6 11- 1.80 - 1.40 - 1.80 - 2.20 - -	-240 -240 -200 -300	220 3,0 11 1.80 1.80 1.80	-240 -240 -240 -300
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexInduction zone – power (kW) / dimensions (mm)  Front light zone – power (kW) / diameter (mm)  Front right flexInduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexInduction rear left – power (kW) / dimensions (mm)  Extended flexInduction rear right – power (kW) / dimensions (mm)  Extended flexInduction rear right – power (kW) / dimensions (mm)  combiZone left – power (kW) / dimensions (mm)	7,4 1 1.80 - 1.40 - 2.20	-240 400 10 - 180 - 145 - 180 - 210 - -	220- 7,4 11 - 1.40 - 1.40 2.20 - 1.80 - 2.20	-240 	220 7,4 1:	-240 -240 -240 -300 -300 -300 -300 -300 -300 -300 -3	220 4,6 1:  1.80  1.40          -	-240 -240 -200	220- 4,6 111-  1.80 1.40  1.80    	-240 -240 -200 -300	220 3,6 1: 1.80  1.40 - - 1.80 - - - - - - - - - - - - -	-240 -240 -240 -300
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front left zone – power (kW) / diameter (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  combiZone left – power (kW) / dimensions (mm)  combiZone right – power (kW) / dimensions (mm)	7,4 1 1.80 - 1.40 - 2.20 3.3	-240 400 10 - 180 - 145 - 180 - 210 - - -	220- 7,4 111 1.40 - 1.40 2.20 1.80	-240 	220 7,4 11 1.80 - 1.40 - 1.80 1.80 1.80 3.3	-240 100 	220 4,6 1: - 1.80 - 1.40 - - 1.80 - - - - - - - - - - - - -	-240 500 10 180 - 145 - 180	220- 4,6 11 1.80 1.40 1.80 3.	-240 600 10 - 180 - 145 - 180 - 210 - - -	220 3,6 1: 1.80  1.40   1.80          -	-240 000 110 - 18 14 18 18 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexinduction zone – power (kW) / dimensions (mm)  Rear right flexinduction zone – power (kW) / dimensions (mm)  Rear right tone – power (kW) / diameter (mm)  Rear right zone – power (kW) / diameter (mm)  Rear right zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexinduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front right flexinduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  flexinduction zone left – power (kW) / dimensions (mm)  Extended flexinduction rear left – power (kW) / dimensions (mm)  Extended flexinduction rear right – power (kW) / dimensions (mm)  Extended flexinduction rear right – power (kW) / dimensions (mm)  Extended flexinduction rear right – power (kW) / dimensions (mm)  Extended flexinduction rear right – power (kW) / dimensions (mm)  Rear left zone – with powerBoost (max. kW)  Rear right zone – with powerBoost (max. kW)	7,4 1 1.80 - 1.80 - 1.80 - 2.20 3. 2.	-240 400 10 - 180 - 145 - 180 - 210 - - - 110	220- 7,4 11 1.40 - 1.40 2.20	-240 00 00 - 145 - 145 - 180 - 210 - - - - - - - - - - - - -	220 7,4 1 1.80 - 1.80 - 1.80 - 2.20 - 3.3	-240 400 100 - 180 - 145 - 180 - 210 - - - 110	220 4,6 11 1.80 - 1.80 - 1.80 - 2.20 - 1.80 - 3.3	-240 -500 -10 -180 -145 -180 -1210 -10 -10 -10 -10 -10	220- 4,6 11 1.80 1.40 1.80 3.	-240 500 10 - 180 - 145 - - 180 - - - - - - - - - - - - -	220 3,0 11 1.80 1.80 1.80 1.80 3.3	-240 000 110 - 18 - 14 18 18 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Front deft zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexhduction zone right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)  Extended flexhduction rear right – power (kW) / dimensions (mm)	7,4 11 	-240 400 10 - 180 - 145 - 180 - 180 - 110 - 110 - 110 - 110 - 110 20	220- 7,4 11 1.40 1.40 1.80 1.80 2.20 2	-240 -00 -00 -145 -145 -145 -180	220 7,4 1 1.80 - 1.80 - 1.80 - 1.80 1.80 3.0 2.20 3.0 2.0	-240 -240	220 4,6 11 1.80 1.80	-240 -240	220- 4,6 11 1.80 1.40 1.80 1.80 3.2.0	-240 -200	220 3,0 11 1.80 1.80 1.80 1.80 3.3 2.	-240 0000 110 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexInduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front left zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)	7,4 1 1.80 - 1.40 - 1.80 1.40 3.20 3.2	-240 400 10 - 180 - 145 - 180 - 180 - 110 - 110	220- 7,4 11 1.40 - 1.40 1.80 2.20	-240 -00 -00 -145 -145 -145 -240180	220 7,4 11 1.80 - 1.80 - 1.80 1.80 1.80 1.80 1.80 1.80 1.80	-240 -240 -100	220 4,6 11 1.80 - 1.80 - - 1.80 - - - - - - - - - 3.	-240 -240 -200	220- 4,6 11- 1.80 - 1.40 - 1.80 - 2.20 - - - 3.	-240 -200	220 3,0 11 1.80 1.80 1.80 3.0 2.20 3.0 2.0	-240 0000 110 - 18 - 14 18 - 21 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front sight flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right flexhduction zone - power (kW) / dimensions (mm)  flexhduction zone left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)	7,4 1 1.80 - 1.40 - 2.20 3.3 2.	-240 400 10 180 - 145 180 110	220- 7,4 11 - 1.40 - 1.40 - 1.80 2.20	-240 -00	220 7,4 11 1.80 - 1.80 - 1.40 1.80 - 3.3	-240 -240 -240 -100	220 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.80	-240 500 10 180 - 145 180 110	220- 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.80	-240 -240 -200 -10 -180 -145180180110100100100100100100	220 3,0 11 1.80 1.80 1.80 1.80 3.8	-240 -240 -240 -100
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  flexhduction zone left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Font right zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)	7,4 1 1.80 - 1.40 - 2.20 3.3 2.	-240 400 10 - 180 - 145 - 180 - 10 - 10 - 10 - 10 - 10 - 10 - 1	220- 7,4 11 - 1.40 - 1.40 2.20 - 1.80 - 2.20 2.20 3.3.	-240 -00	220 7,4 11 1.80 - 1.80 - 1.40 1.80 - 3.3	-240 -240 -100	220 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.80	-240 -200	220- 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.80	-240 -200	220 3,0 11 1.80 1.80 1.80 1.80 3.8	-240 0000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexInduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexInduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexInduction zone – power (kW) / dimensions (mm)  Front left zone – power (kW) / diameter (mm)  Front right flexInduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexInduction zone rower (kW) / dimensions (mm)  Extended flexInduction rear left – power (kW) / dimensions (mm)  Extended flexInduction rear left – power (kW) / dimensions (mm)  combiZone left – power (kW) / dimensions (mm)  combiZone left – power (kW) / dimensions (mm)  Rear left zone – with powerBoost (max. kW)  Rear centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)	7,4 1 1.80 - 1.40 - 2.20 3. 2. 3. 3.	-240 400 10 - 180 - 145 - 180 - 10 - 10 - 10 - 10 - 10 - 10 - 1	220- 7,4 11 1.40 1.80 2.20 2.3.3.3.3.3.3.	-240 -00	220 7,4 11 1.80 - 1.80 - 1.80 - 2.20 - 3. 2. 3. 3.	-240 -240 -100	220 4,6 11 1.80 - 1.80	-240 -200	220- 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.80	-240 -200 -100 -180 -145 -180 -1180 -110 -110 -100 -110 -110 -11	220 3,0 11 1.80 1.80 1.80 3.0 2.20 3.0 2.0 3.0 3.0 3.0	-240 0000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexlnduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexlnduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexlnduction zone – power (kW) / dimensions (mm)  Front tight flexlnduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexlnduction zone right – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexlnduction rear left – power (kW) / dimensions (mm)  Extended flexln	7,4 11.80 - 1.80 - 1.40 - 2.20 - - - - 3. 2.	-240 400 10	220- 7,4 11 1.40 1.80 2.20 2.3.3.3.3.3.3.	-240 -00 -10 -145 -145 -180180	220 7,4 1 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3	-240 100 10 180 - 145 180 110 110	220 4,6 11 1.80 - 1.80 - 1.80 1.80 1.80 3.3 3.3	-240 -240 -300 -10 -180 -145180180110100110110110110110	2200 4,6 11 1.80 - 1.80 - 1.80 3.3 2.20 - 3.3 3.3	-240 -200 -100 -180 -145 -180 -1180 -110 -110 -100 -110 -110 -11	220 3,0 11 1.80 1.80 1.80 3.3 2.	-240 000 10 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexhduction zone right – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  Extended flexhduction rear	7,4 11.80 - 1.80 - 1.40 2.20 3. 2.  HZ35	-240 400 10 180 - 145 180 110 10	220- 7,4 11 1.40 1.40 1.80 2.20 2.3 3 3. 3.	-240 -00 -10 -145 -145 -180180	220 7,4 1 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.4 HZ39	-240 -240 -100	220 4,6 11 1.80 1.80 1.80 3.3 2.20	-240 -240 -300 -300 -300 -300 -300 -300 -300 -3	2200 4,6 11 1.80 - 1.80 - 1.80 3.3 2.20 - 3.3 3.3	-240 -240 -300 -10 -180 -145180180110100100100100100100100	220 3,0 11 1.80 1.80 1.80 3.3 2.	-240 1000 110 
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhiduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhiduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhiduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  flexhiduction zone left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW)	7,4 11.80 - 1.80 - 1.40 2.20 3. 2.  HZ35	-240 400 10 180 - 145 180 110 110	220- 7,4 11 1.40 1.40 2.20 1.80 2.20 2.20 3.3 3.3.	-240 -000 -000 -000 -145 -145 -145 -240 -0180 -0180 -0190 -0	220 7,4 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 -240 -100	220 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 -240 -240 -240 -300 -300 -300 -300 -300 -300 -300 -3	2200 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 -240 -300 -10 -180 -145180180110100100100100100100100	220 3,6 11 1.80 1.80 1.80 3.0 2.20 3.0 3.3 3.3 HZ39	-240 -240 -240 -240 -240 -240 -240 -240
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhduction zone – power (kW) / dimensions (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right flexhduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / dimensions (mm)  Extended flexhduction zone right – power (kW) / dimensions (mm)  Extended flexhduction rear left – power (kW) / dimensions (mm)  combiZone left – power (kW) / dimensions (mm)  combiZone right – power (kW) / dimensions (mm)  Rear left zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front centre zone – with powerBoost (max. kW)  Front left zone – with powerBoost (max. kW)  Front right zone – with powerBoost (max. kW)	7,4 1 1.80 - 1.40 - 1.80 - 2.20 3. 2. HZ35	-240 400 10 180 - 145 180 110 110	220- 7,4 11 - 1.40 - 1.40 - 1.80 - 2.20 2.20	-240 -000	220 7,4 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 -240 -240 -240 -30 -30 -30 -30 -30 -30 -30 -30 -30 -3	220 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.80 - 4.60 - 1.80	-240 -240 -240 -240 -240 -240 -340 -340 -340 -340 -340 -340 -340 -3	2200 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 600 10	220 3,0 11 1.80 1.80 1.80 3.80 3.80	-240 000 10 18 18 18 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
Nominal voltage (V)  Maximum power output (W)  Electrical cable length (cm)  GB plug  Rear left flexhiduction zone – power (kW) / dimensions (mm)  Rear left zone – power (kW) / diameter (mm)  Rear right flexhiduction zone – power (kW) / dimensions (mm)  Rear right zone – power (kW) / diameter (mm)  Rear centre zone – power (kW) / diameter (mm)  Front centre zone – power (kW) / diameter (mm)  Front left flexhiduction zone – power (kW) / dimensions (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  Front right zone – power (kW) / diameter (mm)  flexhiduction zone left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW) / dimensions (mm)  Extended flexhiduction rear left – power (kW)	7,4 1 1.80 - 1.40 - 1.80 - 2.20 3. 2.  HZ39	-240 400 10	220- 7,4 11 - 1.40 - 1.40 2.20 - 1.80 - 2.20 2.20	-240 -000	220 7,4 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 -240 -240 -240 -240 -340 -340 -340 -340 -340 -340 -340 -3	220 4,6 11 1.80 - 1.40 - 1.80 - 1.80 - 3.3 3. 4.7 4.7 4.7 4.7 4.7 4.7 4.7 4.7 4.7 4.	-240 500 10 180 - 145 180 110	220- 4,6 11 1.80 - 1.80 - 1.80 - 1.80 - 3.3 3.3 HZ39	-240 600 100 - 180 - 145 - 180 - 180 - 100 - 180 - 180 - 180 - 180 - 180 100	220 3,0 1: 1.80 1.80 1.80 3.80 1.8	-240 0000 100

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at a y time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

# quickLite ceramic hob specifications

APPLIANCE TYPE			QUICKLITE C	ERAMIC HOBS		
Design family	iQ 700		iQ	700	iQ	700
Model number Black glass with steel trim	_			_	ET645	CEA1E
Black glass	ET875FCF	P1D	ET651	HE17E		_
Metal-look glass	_			_		_
Stainless steel	_			_		_
DESIGN CHARACTERISTICS						
Hob width (mm)	812		5	92	58	33
Side controls	_			_		1
Front controls					-	
Control dials			-			1
touchControl				1		
touchSlider operation						
All-around trim	<del>-</del> _					
Three-sided bevelled frameless finish				•		
Flush-fitting design / installation						
Design trim (front facette with side trim)				_		
Bevelled front					-	-
Can be installed with a Siemens Domino hob	-			-		
KEY FEATURES						
Electronic control					-	-
Electronic power level display					-	-
Automatic safety switch off					<u> </u>	-
Control panel lock			ı		-	
Super boost function				_	-	
powerBoost setting					-	
quickStart				_	-	-
reStart			ı			-
Energy consumption display	-			-		-
Automatic pan recognition	-			-		-
Power management function	-			_		-
Connection current management	_			_		-
FEATURES						
Number of power levels	17		1	7		9
Main on/off switch						_
Timer for all zones						_
Two stage residual heat indicators (H/h)				1	-	1
Control panel pause	-					
PERFORMANCE / TECHNICAL INFORMATION						
Number of cooking zones	4			4		4
Number of flexInduction zones				-		
Number of dual / extendible zones	2					
Number of triple / extendible zones			_	_		_
Left zones flexInduction connected – power (kW) / dimensions (mm)	-	-			-	-
Right zones flexInduction connected – power (kW) / dimensions (mm)	-	-	-	_	-	-
Centre zones flexInduction – power (kW) / dimensions (mm)	-	-	-	-	-	-
Left front zone – power (kW) / dimensions (mm)	2.1	210	1.2	145	1.2	145
Left rear zone – power (kW) / dimensions (mm)	2.1	145	2.0	180	2.2	210
Centre front zone – power (kW) / dimensions (mm)	-	-	-	-	-	_
Centre rear zone – power (kW) / dimensions (mm)	2.4	230	-	-	-	_
Right front zone – power (kW) / dimensions (mm)	2.1	350	2.2	210	2.0	180
Right rear zone – power (kW) / dimensions (mm)	-	-	1.2	145	1.2	145
Nominal voltage (V)	220-24	0	220	-240	220	-240
Total connected electrical load (W)	9,300		6,6	500	6,6	500
Cable length (cm)	110			_		-
GB plug	_			_	-	-
Appliance weight (kg)	10		7	.0	8	.0
Safety approved						•

<sup>■</sup> Yes, model has this feature. 
— Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at a y time, "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed. <sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

**Hobs |** Specifications Specifications | Hobs

# Gas hob specifications

APPLIANCE TYPE					HOBS			
Design family	iQ 700	iQ 700	iQ 700	iQ 500	iQ 500	iQ 500	iQ 500	iQ 500
Model number Stainless steel / stainless steel trim	ER9A6SD70	ER7A6RD70	ER6A6PD70	-	-	-	EC9A5SB90	EC7A5RB90
Black / premium black	-	-	-	EP9A6SB90	EP7A6QB90	EP6A6HB20	-	-
White / premium white	-	_	-	-	-	-	-	-
DESIGN								
Width (mm)	750	750	602	915	752	590	915	750
Control position	Front	Front	Front	Front	Front	Front	Front	Front
KEY FEATURES								
stepFlame technology								
Digital power level display				_	-	_	-	_
Number of dual circuit wok style burners1	1	1	1	1	1	1	1	1
High power (5.0kW+) wok burner2		_	-	-	-	-		
Dual control wok burner3		_	-	-	-	-		
'Diamond' shape burner layout4	-	-	-	-	-	-	-	-
Dishwasher safe pan supports5				-	-	-	-	-
Hob surface type	Ceramic glass	Ceramic glass	Ceramic glass	Tempered glass	Tempered glass	Tempered glass	Metal	Metal
FEATURES								
Number of cooking zones	4	4	4	5	5	4	5	5
Individual power levels	9	9	9	9	9	9	9	9
Variable power levels	-	-	-	-	-	-	-	-
Ignition via control dials						•		
Flame-failure safety device						•		•
Cast iron pan supports (number)	3 x dishwasher safe	2 x dishwasher safe	2 x dishwasher safe	5	5	4	3	3
Cast iron finish pan supports (number)	-	-	-	-	_	-	-	-
Enamelled steel pan supports (number)	_	_	_	_	_	_	-	_
Low profile single piece burners				-	_	_	-	_
Two piece burners	_	-	-					
Comfort profile				_	_	-	-	-
Can be combined with other models with comfort profile	•	•	•	-	-	-	-	-
Installation flush with work top possible	_	_	_		-		_	_
PERFORMANCE / TECHNICAL INFORMATION					_			
Nominal voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Maximum gas power output load (W)	13,700	11,900	7,700	11,500	11,500	8,000	12,500	12,500
Fotal connected electrical load (W)	2.0	2.0	2.0	1.0	1.0	1.0	1.0	1.0
Cable length (cm)	150	100	100	150	100	100	100	100
GB plug	-	-	-	-	-	-	-	-
Left burner power (kW)	6.00	_	_	4.00	_	_	5.00	_
Front left burner power (kW)	1.10	1.90	1.10	-	1.00	1.75	5.00	1.00
Back left burner power (kW)	1.90	1.90	1.90		1.75	1.75		1.75
Centre/centre front burner power (kW)	1.90	4.20	-	1.00	4.00	1.73	1.00	5.00
Centre back burner power (kW)		4.20		1.75	4.00	_	1.75	3.00
Front right burner power (kW)	1.90	1.10	1.90	1.75	1.75	1.00	1.75	1.75
· · · · · · · · · · · · · · · · · · ·	2.80	2.80	2.80	3.00	3.00	3.50	3.00	3.00
Back right burner power (kW) Right burner power (kW)	2.80	2.80	2.80	3.00	3.00	3.50	3.00	3.00
Pre-set for natural gas	_	_	_	-	_	-	-	_
<u> </u>	-	-				- :		-
CE Marked STANDARD ACCESSORIES	_							
Wok stand6								
LPG jets	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mba
PG Jets OPTIONAL ACCESSORIES	20-50 / 3 / mpar	20-3U13/MDar	20-3013/mpar	20-30 / 3 / mpar	20-30/3/mbar	20-3013/mpar	20-3013/mpar	20-30/3/mba
Connecting strip to link to other comfort profile models	HZ394301	HZ394301	HZ394301	-	-	-	-	-

Feature not available for this model. Yes, model has this feature.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.

 $^2\mbox{High power output}$  for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.

<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.

Diamond layout offers:

— greater convenience / accessibility with 2 large pans at the same time.

- compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.

- no need to reach over front zones to access the higher power burners.

- compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.

- compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.

<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

<sup>6</sup>For round based pans.

# Gas hob specifications

APPLIANCE TYPE					GAS HOBS				
Design family	iQ 500	iQ 500	iQ 500	iQ 500	iQ 500	iQ 300	iQ 300	iQ 300	iQ 30
Model number Stainless steel / stainless steel trim	EC7A5QB90	EC715RB90E	EC6A5IB90	EC6A5HC90	EC6A5PB90	EG6B5HB60	EG6B5PB60	EB6B5HB60	EB6B5PI
Black / premium black	-	-	-	_	-	-	-	_	-
White / premium white	-	-	-	-	-	-	-	-	-
DESIGN									
Width (mm)	750	702	582	582	582	582	582	580	580
Control position	Front	Front	Front	Front	Front	Front	Front	Right side	Right
KEY FEATURES									
stepFlame technology	=	-	=	=	=	-	-	_	-
Digital power level display	-	-	-	-	-	-	-	-	-
Number of dual circuit wok style burners1	1	1	1	1	-	1	-	1	-
High power (5.0kW+) wok burner2	-		-	-	-	-	-	_	-
Dual control wok burner3	-		-	-	-	-	-	-	-
'Diamond' shape burner layout4	-	-		-	-	-	-	-	-
Dishwasher safe pan supports5	_	-	_	-	_	-	-	-	_
Hob surface type	Metal	Metal	Metal	Metal	Metal	Metal	Metal	Metal	Met
FEATURES									
Number of cooking zones	5	5	4	4	4	4	4	4	4
Individual power levels	9	_	9	9	9	_	_	_	_
Variable power levels	-		_	-	_		-		
Ignition via control dials		-						-	
Flame-failure safety device								_	
Cast iron pan supports (number)	3	2	2	2	2	-	-	-	-
Cast iron finish pan supports (number)	-	_	_	-	-	2	2	2	2
Enamelled steel pan supports (number)	-	-	-	_	-	-	-	_	-
Low profile single piece burners	-	-	-	-	-	-	-	-	-
Two piece burners							-		
Comfort profile	-	-	-	_	-	-	-	_	-
Can be combined with other models with comfort profile	-	-	-	-	-	-	-	-	-
Installation flush with work top possible	_	_	_	_	_	_	_	_	_
PERFORMANCE / TECHNICAL INFORMATION									
Nominal voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-
Maximum gas power output load (W)	11,500	12,400	9,750	8,000	7,500	8,000	7,500	7,700	7,4
Total connected electrical load (W)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.
Cable length (cm)	100	100	100	100	100	100	100	100	10
GB pluq	-	-	-	-	-	-	-	-	-
Left burner power (kW)	_	_	4.00	_	_	_	_	_	
Front left burner power (kW)	1.00	1.00	-	1.75	1.75	1.75	1.75	3.30	3.0
Back left burner power (kW)	1.75	1.70	_	1.75	1.75	1.75	1.75	1.70	1.7
Centre/centre front burner power (kW)	4.00	5.00	1.00	1.73	-	-	-	-	1.7
Centre back burner power (kW)	-	-	1.75		_	_	_	_	
Front right burner power (kW)	1.75	1.70	1./5	1.00	1.00	1.00	1.00	1.00	1.0
Back right burner power (kW)	3.00	3.00	_	3.30	3.00	3.30	3.00	1.70	1.7
Right burner power (kW)	5.00	-	3.00	- 3.30	5.00	3.30	5.00	1.70	1.7
Pre-set for natural gas	-	-	5.00	-	_	-	-	-	
CE Marked		-	-	-		-	-	-	_
STANDARD ACCESSORIES									
Wok stand6		-		_		-		_	
	20.20./27		20.20/27		20.20/27		20.20/27		20 20 12
LPG jets	28-30 / 3 / mbar	28-30 / 3 / mbar	28-30/3/mbar	28-3013/mbar	28-30 / 3 / mbar	28-30 / 3 / mbar	28-30 / 3 / mbar	28-30 / 37mbar	28-30/3
OPTIONAL ACCESSORIES									
Connecting strip to link to other comfort profile models	-	-	-	-	-	_	-	-	-

Yes, model has this feature.
 Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.

 $^{2}\mbox{High power output}$  for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.

<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.

Diamond layout offers:

— greater convenience / accessibility with 2 large pans at the same time.

- compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.

- no need to reach over front zones to access the higher power burners.

- compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.

- compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.

<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

<sup>6</sup>For round based pans.

Hobs | Specifications Specifications | Hobs

# Domino hob specifications

APPLIANCE TYPE		KI DOMINO HOB	FLEXINDUCTION	
Design family		<b>⊙</b> 500	iQ70	0
Model number Black glass / stainless steel trim		-	EX375F)	KB1E
Stainless steel	ET4	75FYB1E	-	
DESIGN				
Hob width (mm)		392	302	
Side controls		-	_	
Front controls			•	
Control dials		-	_	
touchControl				
touchSlider operation				
All-around trim		-	_	
Three-sided bevelled frameless finish		-	_	
Flush-fitting design / installation		-	_	
Design trim (front facette with side trim)				
Bevelled front		-	-	
Can be installed with a Siemens Domino hob				
KEY FEATURES				
Electronic control				
Electronic power level display				
Automatic safety switch off				
Control panel lock		-	_	
Super boost function		-	-	
powerBoost setting		-		
quickStart		-	-	
reStart		-	-	
Energy consumption display		-	_	
Automatic pan recognition		-		
Power management function		-		
Connection current management		-	_	
FEATURES				
Number of power levels		9	17	
Main on/off switch		•		
Timer for all zones		•		
Two-stage residual heat indicators (H/h)		•		
Control panel pause		-		
PERFORMANCE / TECHNICAL INFORMATION				
Number of cooking zones		2	2	
Number of flexInduction zones		_	1	
Number of dual / extendible zones		_		
Number of triple / extendible zones		_	_	
Left zones flexInduction connected – power (kW) / dimensions (mm)	-	_	- 1	-
Right zones flexInduction connected – power (kW) / dimensions (mm)	-	_	-	_
Centre zones flexInduction connected – power (kW) / dimensions (mm)	-	-	1.0-3.6	760
Left front zone – power (kW) / dimensions (mm)	_	_	-	_
Left rear zone – power (kW) / dimensions (mm)	_	_	-	_
Centre front zone – power (kW) / dimensions (mm)	0.95	292 x 344	-	_
Centre rear zone – power (kW) / dimensions (mm)	-	-	_	_
Right front zone – power (kW) / dimensions (mm)	-	_	_	_
Right rear zone – power (kW) / dimensions (mm)	_	_	_	_
Nominal voltage (V)		20-240	220-2	
Total connected electrical load (W)		1,900	3,60	
Cable length (cm)		110	110	
GB plug		-	-	
Appliance weight (kg)			6.0	
approvide veryllt (NY)	11.0		0.0	

Yes, model has this feature. Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

# Domino hob specifications

APPLIANCE TYPE		WOK DOMINO GAS HOB	DOMINO GAS HOB
Model number	Stainless steel / stainless steel trim	ER3A6AD70	ER3A6BD70
DESIGN			
Width (mm)			306
Control position		Front	Front
KEY FEATURES			
stepFlame technology			•
Digital power level display		•	•
Number of dual circuit wok style burne	rs¹	1	-
High power (5.0kW+) wok burner2		•	-
Dual control wok burner <sup>3</sup>		•	-
'Diamond' shape burner layout <sup>4</sup>		-	_
Dishwasher safe pan supports <sup>5</sup>		•	
Hob surface type		Ceramic glass	Ceramic glass
FEATURES			
Number of cooking zones		1	2
Individual power levels		9	9
Variable power levels		-	-
Ignition via control dials		•	
Flame-failure safety device		•	
Cast iron pan supports (number)		1 x dishwasher safe	1 x dishwasher safe
Cast iron finish pan supports (number)		-	_
Enamelled steel pan supports (number	)	-	_
Low profile single piece burners			
Two piece burners			
Comfort profile		-	
Can be combined with other models w	ith comfort profile	•	-
Installation flush with work top possible		<del>_</del>	
PERFORMANCE / TECHNICAL INFORM			
Nominal voltage (V)	7.11.5.1	220-240	220-240
Maximum gas power output load (W)		6,000	4,700
Total connected electrical load (W)		1.0	1.0
Cable length (cm)		100	100
GB plug		_	_
Left burner power (kW)			
Front left burner power (kW)			
Back left burner power (kW)			
Centre/centre front burner power (kW)		6.00	1.90
Centre back burner power (kW)		-	2.80
Front right burner power (kW)			-
Back right burner power (kW)			
Right burner power (kW)		_	
Pre-set for natural gas			-
CE Marked			-
STANDARD ACCESSORIES		-	<u>-</u>
Wok stand <sup>6</sup>			_
LPG jets		28-30 / 37mbar	28-30 / 37mbar
OPTIONAL ACCESSORIES		20°30 / 3711IJdl	20°30 / 3711IDdl
Connecting strip to link to other comfo	rt profile models	HEZ394301	HEZ394301
Yes, model has this feature.	it profile models	ΠΕΔ3943U I	TEZ3943U1

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.

<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.

<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.

Diamond layout offers:

- greater convenience / accessibility with 2 large pans at the same time.

- greater Convenience? accessioning with 2 large pairs at the same time.

   compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.

   no need to reach over front zones to access the higher power burners.

   compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.

   compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power

<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel


Hobs | Technical diagrams | Hobs

# Hob technical diagrams

Venting hob EX875LX34E


# Area for the circulating-air module or the duct. The exact position depends on the worktop depth. min. 40 min. 50 min. 50 \* Minimum distance from the hob cut-out to the wall \*\* Recessed depth


## Venting hob ED851FS11E

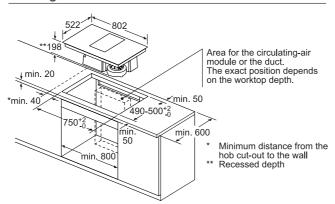


## For all venting hobs

Below are diagrams for installtion applicable to all venting hobs




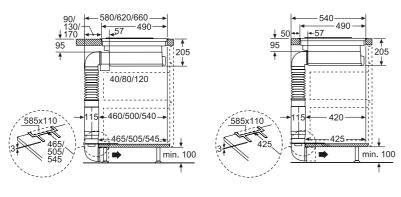


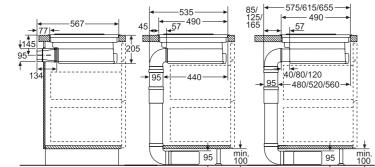


# flexInduction hobs EX975KXW1E, EX975LXC1E and EX975LVV1E

flexInduction hobs EX875KYW1E, EX879FVC1E and EX875BEB1E







# flexInduction hobs EX675JYW1E, EX675LXV1E, EX679FEC1E and EX675BEB1E




## flexInduction hob EX275FXB1E




# flexInduction and induction hobs EX851FVC1E and ED851FWB1E




# flexInduction and induction hobs EX651FEC1E, EX611BEB1E, ED651FSB1E, EU631FEB1E, EU611BEB1E and EU631BEF1B



#### Induction hob EH975LVC1E



#### **Induction hob EH801FVB1E**

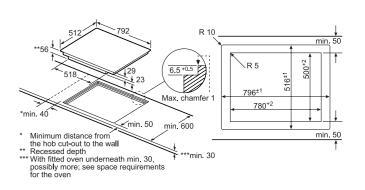


Hobs | Technical diagrams

# Hob technical diagrams

## Induction hob EH601FEB1E

# \* Minimum distance from the hob cut-out to the wall \*\* Recessed depth \*\*\* With fitted oven underneath min. 30, possibly more; see space requirements for the oven


## Induction hob EH845FVB1E




# ceramic hobs

Below are diagrams for installtion applicable to all flexInduction, induction and quickLite ceramic hobs


For all flexInduction, induction and quickLite

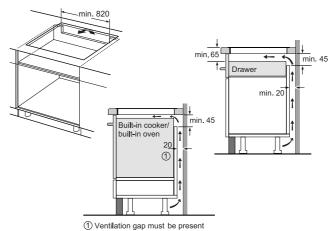


## Gas hob ER9A6SD70




# Induction hob EH645FEB1E




# quickLite ceramic hob ET875FCP1D




## Gas hob ER7A6RD70




## Gas hob ER6A6PD70




## quickLite hob ET651HE17E




## quickLite ceramic hob ET645CEA1E



#### Gas hob EP9A6SB90

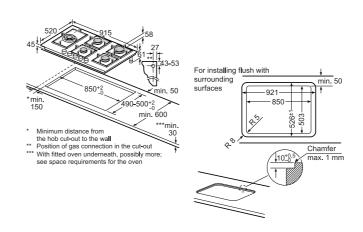

## Gas hob EP7A6QB90

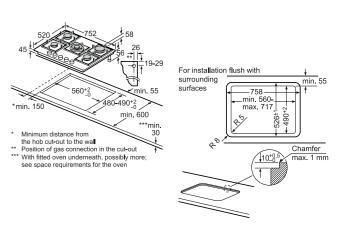


Hobs | Technical diagrams Technical diagrams | Hobs

# Hob technical diagrams


## Gas hob EP6A6HB20

# For installatio flush with surfaces Minimum distance from the hob cut-out to the wall the nob cut-out to the wall \* Position of gas connection in the cut-out \* With fitted oven underneath, possibly more; see space requirements for the oven


#### Gas hob EC9A5SB90




## Gas hobs EC7A5RB90 and EC7A5QB90




## Gas hob EC715RB90E




## Gas hobs EC6A5IB90, EC6A5HC90, EC6A5PB90, EG6B5HB60 and EG6B5PB60




## Gas hobs EB6B5HB60 and EB6B5PB60




## Teppan yaki domino hob ET475FYB1E




## flexInduction domino hob EX375FXB1E



## Wok domino gas hob ER3A6AD70





## Domino gas hob ER3A6BD70





## Domino hob combination installation

## Below are diagrams showing the possible combinations for installing your Domino hob

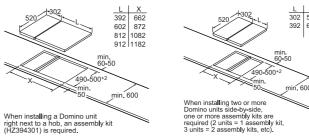

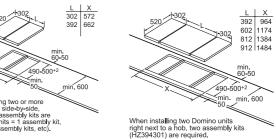






Cutout dimension (X) depending on the combination see table:

vviatn type:							
Device width	: 30	2 39	2 60	2 71	0 812	912	
	- 1		CD	LX			
2x30		302	302	-	-	604	572
1x30, 1x40		302	392	-	-	694	662
1x30, 1x60		302	602	-	-	904	
1x30, 1x70			710	-	-	1012	
1x30, 1x80		302		-	-	1114	
1x30, 1x90		302	912	-	-	1214	1182
2x40		392	392	-	-	784	752
1x40, 1x60		392		-	-	994	
1x40, 1x70		392	710	-	-	1102	1070
1x40, 1x80		392			-	1204	
1x40, 1x90		392	912	-	-	1304	1272
3x30		302	302	302		906	874
2x30, 1x40		302		392		996	964
2x30, 1x60		302				1206	
2x30, 1x70		302	302	710	-	1314	1282
2x30, 1x80		302	302			1416	
2x30, 1x90		302		912	-	1516	1484
1x30, 2x40		302		392		1086	1054
1x30, 1x40,			392		-	1296	1264
1x30, 1x40,				710		1404	1372
1x30, 1x40,				812		1506	1474
1x30, 1x40,	1x90	302	392		-	1606	1574
3x40		392	392	392	-	1176	1144
2x40, 1x60		392	392		-	1386	1354
4x30		302	302	302	302	1208	1176
3x30, 1x40		302		302		1298	1266
2x30, 2x40		302	302		392	1388	1356
1x30, 3x40		302	392	392	392	1478	1446



**Hoods** | Specifications Specifications | Hoods

# Hoods specifications

Project   Proj	INSTALLATION TYPE HOOD TYPE	DOMINO	NSTALLATION DOWNDRAFT	CEILING	CEILING	STALLATION CEILING	ISLAND CUBE		
Continue		iQ 700 –	iQ 700 -	iQ 700 LF959RE55B	iQ 700 LF959RB51B	iQ 700 –	iQ 700 -	iQ 700 LF91BA582B	iQ500 LF98GB542B
Testing   Test				-	-	_ LF959RB21B		-	-
Applications   100   972   800   900   370   900   90   90   90   90   90   90		-	-	-	-	-	-	-	-
Blanch action controls	Appliance width (mm)								900
Roch butter corted	Illuminated controls			-	-	-		-	
Soft Count of the State County			-1-	-1-			-1-	-1-	-1-
When exclusional control (color) with a control (color) with a control (color) with a color (color) with a color) with a color (color) with a							-	-	-
The second process of the process	White electronic display	-		-					
Weit certain promoted inside allow concess	Glass canopy					-	-	-	_
			-1-	_ _/■					<b>■</b>
Section   Control   Cont	Worktop integrated installation			-	-	-	-	-	-
Flores Connect	KEY FEATURES	_		_		-		_	
Chemolic Control Control		-		-		-		-	-
		-		-				-	-
Section   Company   Section   Sect	Electronic control				•	•			
Automatical effer numbring (implicated)  7 W. E.D. Biglist Stepp  7 W.							-	-	-
Interest logopation									-/- 10
7 M LED pilit steips	Interval operation						-		-
3	7 W LED light strip	-	1	-			-		-
# WED   10   10   10   10   10   10   10   1									-
1.5 W.167	4 W LED lights	-				-	4	-	- 4
2 W Mg voltage halogen bulbs	1.5 W LED	-	-	-	-	-	-	-	-
## 40 W bulbs   -		-	_	-				-	-
Soft-Light with dimmer function									-
Number of metal greace filter crasettes  1 2 2 3 3 1 3 1 3	softLight with dimmer function	-			-	-		-	
Repropose   Filter	Number of metal grease filter cassettes		2	2			1		1
Suitable for ducted / recirculating approaches		-	-	-	-	-	-	-	-
Suitable for ducted i recirculating operation	PERFORMANCE / TECHNICAL INFORMATION				_				
- ducted recirculating at power level 2	Suitable for ducted / recirculating operation	<b>I</b> / <b>I</b>		<b>I</b> /		<b>I</b> / <b>I</b>		<b>I</b> /	■/■
- ducted recirculating at power level 4 or intensive setting 1	- ducted / recirculating at power level 1								240 / 160
- ducted recirculating at power level 4 or intensive setting 1 -   -   -   -   -   -   -   -   -   -									360 / 250 440 / 290
Max noise level (sound pressure) based on dB(A) ve 20 yes 0°   clucted   recirculating at power level 1   48   51   29   40   27   28   35   36   35   36   -139   27   38   31   clucted   recirculating at power level 2   50   55   44   56   36   38   43   44   43   44   -151   42   51   42   51   40   40   44   56   36   38   43   44   56   36   38   43   44   56   51   50   51   54   54   54   54   56   54   56   56	- ducted / recirculating at power level 4 or intensive setting 1	-1-					- /450	-1-	-/- 800/360
- ducted   recirculating at power level 2   50   54   44   56   36   38   43   44   43   44   -151   42   51   40   40   40   40   45   55   50   51   -156   49   54   44   40   40   40   40   40   40	Max noise level (sound pressure) based on dB(A) re 20 μPa (1,3)								
- ducted recirculating at power level 4 or intensive setting 1 -1 - 52 / 60 -111111 - 51 / 55 / 55									31 / 46 40 / 56
**Outclet   recirculating, intensive setting or i	- ducted / recirculating at power level 3								44 / 55 - / -
- ducted   recirculating at power level 1	- ducted / recirculating, intensive setting or intensive setting 2								51 / 58
-ducted recirculating at power level 3 of 7/11 62 172 56 158 64 165 64 165 -169 63 168 58.  -ducted 1 recirculating at power level 4 or intensive setting 1 -1 - 66 174 -1 -1 -1 -1 -1 -172 -174 68 172 69.  -ducted 1 recirculating, intensive setting 2 70 173 67 175 66 166 71 172 71 172 -174 68 172 69.  -ducted 1 recirculating, intensive setting 2 70 173 67 175 66 166 71 172 71 172 -174 68 172 69.  -ducted 1 recirculating, intensive setting 2 70 173 67 175 66 166 71 172 71 172 -174 68 172 69.  -ducted 1 recirculating by the setting 1 automatic intensive revert		62 / 65					-152	41 / 52	45 / 60
- ducted / recirculating at power level 4 or intensive setting 1									54 / 67 58 / 69
Power levels   3   3   3   3   3   3   3   3   3	- ducted / recirculating at power level 4 or intensive setting 1	-1-	66 / 74	-1-	-1-	-1-	-172	-1-	-1-
Pipe outlet diameter (mm)	Power levels	3	3	3	3	3	3	3	3
Motor power (W)									150 / 120
Total electrical loading (W)  202-240  220-240  220-240  220-240  220-240  220-240  220-240  220-239  220-239  220-239  220-240  220-20  240  24									550 / 650 160
Power cable length (cm)	Total electrical loading (W)	145	317	188	380	380	272	272	272
Appliance weight (kg)    13.6   36.8   23.0   15.0   15.0   21.7   33.0   33.0   33.0   33.0   35.0	Power cable length (cm)								220-240 130
A+ A A A A A A A A A A A A A A A A A A		13.6					21.7		30.0
National AccessORIES   National AccessORIES	Safety approved								A+
Recirculating kit (without chimney)	OPTIONAL ACCESSORIES								
CleanAir recirculating kit (stainless steel)			-					-	LZ53650 -
Integrated cleanAir recirculating kit (plastic)		-	LZ29IDQ00			LZ56700			LZ53251 LZ57500
Regenerative cleanAir recirculating kit	Integrated cleanAir recirculating kit (plastic)	-		-	-	-	-	-	LZ56200
Regenerative cleanAir odour filter         -	Regenerative cleanAir recirculating kit	-	-	-	-	-	-	-	-
9.00 x 720mm stainless steel back panel									
600 x 720mm stainless steel back panel	900 x 720mm stainless steel back panel	-					-	-	_
Paper grease filters	600 x 720mm stainless steel back panel	-	-	-	-	-	-	-	-
Chimney extension 1500mm     -	Paper grease filters		-	-	_	-	-	-	-
Chimney extension 1100mm         -         -         -         -         L212285         L212           Chimney extension 1600mm         -		-		-					LZ12520 -
Chimney extension 750mm         -		-		-	-	-	-	LZ12285	LZ12275
Left / right inclined roof adapter     -     -     -     -     -     LZ12310     LZ12       Front / back inclined roof adapter     -     -     -     -     -     -     LZ12410     LZ12       Wall mounting kit     -     -     -     -     -     -     -       downDraft remote motor mounting kit     -     LZ29IDM00     -     -     -     -     -       Remote control     -     -     -     -     -     -     -     -				_					LZ12375 -
Front I back inclined roof adapter         -         -         -         -         -         LZ12410         LZ12           Wall mounting kit         -	Chimney extension 1600mm Chimney extension 750mm		-						LZ12500
downDraft remote motor mounting kit         -         LZ29IDM00         - <td>Chimney extension 1600mm Chimney extension 750mm Chimney extension 500mm</td> <td>-</td> <td>-</td> <td>-</td> <td></td> <td></td> <td></td> <td></td> <td></td>	Chimney extension 1600mm Chimney extension 750mm Chimney extension 500mm	-	-	-					
	Chimney extension 1600mm Chimney extension 750mm Chimney extension 500mm Left / right inclined roof adapter Front / back inclined roof adapter	- - - -	-	- -	-	-	-	LZ12310	LZ12300 LZ12300 LZ12400
Handle strip	Chimney extension 1600mm Chimney extension 750mm Chimney extension 500mm Left / right inclined roof adapter Front / back inclined roof adapter Wall mounting kit downDraft remote motor mounting kit	- - - -	- - -	- -	- - - -	- - -	- - -	LZ12310 LZ12410 -	LZ12300

Yes, model has this feature. Feature not available for this model.

# Hoods specifications

HOOD TYPE Design family	WALL CUBE	ANGLED iQ 700	ANGLED IQ 700	ANGLED iQ300	ANGLED IQ300	ANGLED iQ 300
Model number Stainless steel Black or steel with black glass	LC37IVV60B	LC91KWW60B	-	LC87KBM60B	LC87KHM60B	LC67KHM60
White or steel with white glass	-	-	LC91KWW20B	-	-	-
Silver metallic lacquer DESIGN FEATURES	-	-	-	-	-	_
Appliance width (mm) Day / night glass & metal fascia	330	900	900	800	800	600
lluminated controls	•	•				
lider / rocker switch control	-1-	-1-	- <i>l</i> -	-1-	- I - -	-1-
ouch control						
oftTouch metal button control Vhite electronic display	-	-	-	_	-	-
llue indicator lights class canopy						
leight adjustable chimney sections	=					
Vall / ceiling mounted installation Vorktop integrated installation	<u> </u>	■ <i>l</i> –	<u> </u>	<u> </u>	<u> </u>	<u> </u>
nstall in, between or under furniture carcass	-	-	-	-	-	_
KEY FEATURES emotionLight Pro	-		-	-	-	_
lome Connect ookConnect hob based hood control				_	-	-
limateControl sensor	-			_	_	_
Electronic control	-					
lectronic power level display				-	-	-
Grease / charcoal filter saturation indicator Automatic after running (minutes)	10	10	10	-1-	-	
nterval operation	-	-	-	-	-	-
8 W LED glass panel ' W LED light strip		-	-	-	-	-
W LED light strips	-	-	-		_ 2	2
W LED lights	-	-	-	-	-	-
B W energy-saving LED .5 W LED	2	2	2 –	2	-	_
W LED	-	-	-	-	-	-
20 W low voltage halogen bulbs 25 W high voltage halogen bulbs	<u> </u>	-	-	-	-	-
0 W bulbs oftLight with dimmer function	-	-	-		_ _	-
iteel filter cover	=	-	-	-	-	-
Number of metal grease filter cassettes Additional noise reduction insulation	1	2	2	2	2	2
aper grease filter	-	-	-	-	-	-
PERFORMANCE / TECHNICAL INFORMATION Casy installation system	-					
uitable for ducted / recirculating operation extraction rate in m³/h (1,2)	-/ <b>■</b>	<b>I</b> /	<b>1</b>	<b>I</b> /	<b>1</b> /	1
ducted / recirculating at power level 1	- / 170	280 / 190	280 / 190	240 / 200	260 / 210	240 / 210
ducted / recirculating at power level 2 ducted / recirculating at power level 3	- / 270 - / 330	380 / 340 530 / 450	380 / 340 530 / 450	320 / 280 400 / 380	340 / 280 420 / 380	330 / 280 400 / 380
ducted / recirculating at power level 4 or intensive setting 1 ducted / recirculating, intensive setting or intensive setting 2	- / 360 - / 400	710 / 540 950 / 630	710 / 540 950 / 630	680 / 560	- / - 680 / 570	- I - 660 I 570
Max noise level (sound pressure) based on dB(A) re 20 µPa (1,3)						
ducted / recirculating at power level 1 ducted / recirculating at power level 2	- / 39 - / 49	27 / 37 35 / 49	27 / 37 35 / 49	35 / 40 40 / 47	34 / 40 38 / 45	34 / 39 39 / 46
ducted / recirculating at power level 3	- 154 - 156	42 / 56	42 / 56	44 / 53	42 / 51	43 / 54
ducted / recirculating at power level 4 or intensive setting 1 ducted / recirculating, intensive setting or intensive setting 2	-156	49 / 60 55 / 64	49 / 60 55 / 64	53 / 61	- / - 51 / 61	52 / 61
loise level (sound power) based on dB(A) re 1pW (1.4) ducted / recirculating at power level 1	-/52	41 / 51	41 / 51	49 / 54	48 / 54	48 / 53
ducted / recirculating at power level 2	-162	49 / 63	49 / 63	54 / 61	52 / 59	52 / 59
ducted / recirculating at power level 3 ducted / recirculating at power level 4 or intensive setting 1	- 167 - 170	56 / 69 63 / 74	56 / 69 63 / 74	58 / 67 67 / 75	56 / 65 - / -	57   67
ducted / recirculating, intensive setting or intensive setting 2	-172	69   78	69   78	- 3	65 / 75	66 / 74
ower levels ntensive setting / automatic intensive revert	3 ■/■	3 ■ / ■	3	<b>I</b> / <b>I</b>	3 <b>1</b>	3 ■ / ■
ipe outlet diameter (mm) Minimum distance above an electric / gas hob (mm)	550 / 650	120 / 150 450 / 600				
Motor power (W)	140	260	260	260	260	260
otal electrical loading (W)  Nominal voltage (V)	146 220-240	270 220-240	270 220-240	263 220-240	263 220-240	263 220-240
ower cable length (cm)	130	130	130	130	130	130
GB plug Appliance weight (kg)	22.3	29.6	26.8	19.6	19.8	25.7
afety approved energy rating	-	A+	A+	A	A	A
OPTIONAL ACCESSORIES						
decirculating kit (needed if recirculating) decirculating kit (without chimney)	<u>-</u>	LZ10AKU00 LZ10AKT00	LZ10AKU00 LZ10AKT00	LZ10AKU00 LZ10AKT00	LZ10AKU00 LZ10AKT00	LZ10AKU00 LZ10AKT00
Replacement active carbon filter	-	LZ10AKA00	LZ10AKA00	LZ10AKA00	LZ10AKA00	LZ10AKA00
leanAir recirculating kit (stainless steel) ntegrated cleanAir recirculating kit (plastic)	<u>-</u>	LZ10AXC50	LZ10AXC50	LZ10AXC50 -	LZ10AXC50	LZ10AXC50
leanAir replacement active carbon filter legenerative cleanAir recirculating kit	LZ56200	LZ56200 LZ10AKS00	LZ56200 LZ10AKS00	LZ56200 LZ10AKS00	LZ56200 LZ10AKS00	LZ56200 LZ10AKS00
egenerative cleanAir recirculating kit (without chimney)	-	LZ10AKR00	LZ10AKR00	LZ10AKR00	LZ10AKR00	LZ10AKR00
egenerative cleanAir odour filter 00 x 720mm stainless steel back panel	LZ00XXP00 –	LZ00XXP00 -	LZ00XXP00 –	LZ00XXP00 -	LZ00XXP00	LZ00XXP00
00 x 720mm stainless steel back panel	-	-	-	-	-	-
00 x 720mm stainless steel back panel owering frame		-	-	-		
aper grease filters	-	- 17104YK50	- 17104YK50	- 17104YK50	-	- 17104YK50
himney extension 1000mm himney extension 1500mm	<u>-</u>	LZ10AXK50 LZ10AXL50	LZ10AXK50 LZ10AXL50	LZ10AXK50 LZ10AXL50	LZ10AXK50 LZ10AXL50	LZ10AXK50 LZ10AXL50
himney extension 1100mm himney extension 1600mm	-	-	-	-	-	_
himney extension 750mm	<u>-</u>	-	-	-	-	-
himney extension 500mm eft / right inclined roof adapter	<u>-</u> -					
ront / back inclined roof adapter	-	-	-	-	-	-
	_	_	_	_	-	_
Vall mounting kit ownDraft remote motor mounting kit	-	-	-	-	-	_

<sup>&</sup>lt;sup>1</sup> Air flow and noise declarations made in line with CECED Code Of Conduct

<sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>3</sup> Sound pressure measured according to EN60704–2–13 on largest pipe diameter

<sup>4</sup> Sound power measured according to EN60704–3 on largest pipe diameter

Feature not available for this model. <sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>&</sup>lt;sup>3</sup>Sound pressure measured according to EN60704–2–13 on largest pipe diameter <sup>4</sup>Sound power measured according to EN60704–3 on largest pipe diameter

**Hoods** | Specifications Specifications | Hoods

# Hoods specifications

DOD TYPE esign family	FLAT iQ 700	FLAT iQ 700	STRAIGHT GLASS	STRAIGHT GLASS	CURVED GLASS	CURVED GL iQ 300
odel number Stainless steel	-		-		-	-
Black or steel with black glass White or steel with white glass	LC97FVW60B -	LC97FVW20B	LC97GHM50B -	LC67GHM50B -	LC97AFM50B -	LC67AFM5
Silver metallic lacquer	-	-	-	-	-	-
opliance width (mm)	900	900	900	600	900	600
y / night glass & metal fascia uminated controls		-	-	-	-	
der / rocker switch control	-1-	-1-	-1-	-1-	-1-	-1-
sh button control		_	_		_	_
uch control ftTouch metal button control	-	-	-	-	-	-
hite electronic display				=		=
ue indicator lights ass canopy		-	-	-	-	
eight adjustable chimney sections						
all / ceiling mounted installation orktop integrated installation	<u> </u>	■ / - -	■1- -	■ / - -	■ / - -	■/- -
stall in, between or under furniture carcass	-	-	-	-	-	-
Y FEATURES notionLight Pro			_	-	_	_
ome Connect	-	<b>-</b>	-	-	-	_
okConnect hob based hood control mateControl sensor			<u> </u>	-		-
ectronic control		-	-	-	-	_
mote control			-	-	-	-
ectronic power level display ease / charcoal filter saturation indicator	-	-	<u>-</u>	-	-	-
tomatic after running (minutes)	10	10	-	-	-	-
erval operation W LED glass panel	<u> </u>		<u>-</u>	-	<u> </u>	-
V LED light strip		_	-	_	-	-
N LED light strips N LED lights			_	-	-	-
N LED lights		-	-		-	-
N energy-saving LED	2	2	-	-	-	-
5 W LED	<u> </u>	-	2	2	2	2
W low voltage halogen bulbs	-	-	-	-	-	-
W high voltage halogen bulbs		-	-	-	-	_
ftLight with dimmer function			-	-	-	_
eel filter cover umber of metal grease filter cassettes	2	2	2	1	1	1
Iditional noise reduction insulation				-	-	-
per grease filter	-	-	-	-	-	-
RFORMANCE / TECHNICAL INFORMATION sy installation system	-					
itable for ducted / recirculating operation	<b>I</b> / <b>I</b>	<b>■</b> / <b>■</b>	<b>1</b> /	<b>I</b> /	<b>=</b> / <b>=</b>	<b>=</b> /=
traction rate in m <sup>3</sup> /h <sup>(1,2)</sup> lucted / recirculating at power level 1	230 / 120	230 / 120	260 / 170	270 / 190	250 / 190	260 / 200
lucted / recirculating at power level 2	330 / 220	330 / 220	330 / 250	350 / 270	340 / 270	340 / 280
ucted / recirculating at power level 3 ucted / recirculating at power level 4 or intensive setting 1	420 / 290 570 / 410	420 / 290 570 / 410	450 / 310 - / -	470 / 320	460 / 320 - / -	470 / 320
ucted / recirculating, intensive setting or intensive setting 2	730 / 520	730 / 520	720 / 370	670 / 380	670 / 370	680 / 370
ax noise level (sound pressure) based on dB(A) re 20 µPa (1.3) ucted / recirculating at power level 1	29 / 30	29 / 30	40 / 51	40 / 50	42 / 51	42 / 53
lucted / recirculating at power level 2	38 / 40	38 / 40	45 / 58	46 / 57	48 / 58	49 / 58
ucted / recirculating at power level 3	43 / 45 51 / 55	43 / 45 51 / 55	52 / 61	52 / 61	55 / 62 - / -	55 / 61 - / -
ucted / recirculating at power level 4 or intensive setting 1 ucted / recirculating, intensive setting or intensive setting 2	56 / 58	56 / 58	- / - 61 / 64	- / - 60 / 64	62 / 65	62 / 64
oise level (sound power) based on dB(A) re 1pW (1,4)	42.442	42.442	52.462	52.462	54163	54165
ucted / recirculating at power level 1 ucted / recirculating at power level 2	43 / 43 52 / 53	43 / 43 52 / 53	52 / 63 57 / 70	52 / 62 58 / 69	54 / 63 60 / 70	54 / 65 61 / 70
ucted / recirculating at power level 3	57 / 59	57 / 59	64 / 73	64 / 73	67   74	67 / 73
ucted / recirculating at power level 4 or intensive setting 1 ucted / recirculating, intensive setting or intensive setting 2	64 / 68 69 / 72	64 / 68 69 / 72	-1- 73176	- I - 72 I 76	- I - 74 I 77	-1- 74176
wer levels	3	3	3	3	3	3
tensive setting / automatic intensive revert	120 / 150	120 / 150	■/■ 150/120	150 / 120	150 / 120	150 / 120
pe outlet diameter (mm) nimum distance above an electric / gas hob (mm)	120 / 150 450 / 600	120 / 150 450 / 600	550 / 650	150 / 120 550 / 650	150 / 120 550 / 650	150 / 120 550 / 650
otor power (W)	140	140	250	250	250	250
tal electrical loading (W) pminal voltage (V)	150 220-240	150 220-240	255 220-240	255 220-240	255 220-240	255 220-240
wer cable length (cm)	130	130	130	130	130	130
pliance weight (kg)	26.8	26.8	21.0	17.0	19.0	19.0
fety approved						
ergy rating PTIONAL ACCESSORIES	A	A	A	В	В	В
circulating kit (needed if recirculating)	LZ10AFU00	LZ10AFU00	LZ10DXU00	LZ10DXU00	LZ10DXU00	LZ10DXU0
circulating kit (without chimney)	LZ10AFT00	LZ10AFT00	-	-	- 1710DYA00	LZ10DXA0
placement active carbon filter eanAir recirculating kit (stainless steel)	LZ10AFA00 LZ10AXC50	LZ10AFA00 LZ10AXC50	LZ10DXA00 LZ57000	LZ10DXA00 LZ57000	LZ10DXA00 LZ57000	LZ10DXAC
egrated cleanAir recirculating kit (plastic)	-	-	LZ10FXI00	LZ10FXI00	LZ10FXI00	LZ10FXI0
anAir replacement active carbon filter generative cleanAir recirculating kit	LZ56200 LZ10AFS00	LZ56200 LZ10AFS00	LZ56200 -	LZ56200 -	LZ56200 -	LZ56200
generative cleanAir recirculating kit (without chimney)	LZ10AFR00	LZ10AFR00	-	_	-	_
generative cleanAir odour filter 0 x 720mm stainless steel back panel	LZ00XXP00 -	LZ00XXP00	LZ00XXP00 LZ50961	LZ00XXP00	LZ00XXP00 LZ50961	LZ00XXP0
0 x 720mm stainless steel back panel		-	LZ50961 -	-	LZ50961 -	-
0 x 720mm stainless steel back panel	-	-	-	LZ50661	-	LZ50661
wering frame per grease filters		-	_ _	-	-	-
imney extension 1000mm	LZ10AXK50	LZ10AXK50	LZ12250	LZ12250	LZ12250	LZ12250
imney extension 1500mm imney extension 1100mm	LZ10AXL50 -	LZ10AXL50	LZ12350 -	LZ12350 -	LZ12350 -	LZ12350
imney extension 1600mm		-	-	-	-	-
imney extension 750mm	-	-	-	-	-	-
imney extension 500mm ft / right inclined roof adapter	<u> </u>	-	-	-	-	-
ont / back inclined roof adapter	-	-	-	-	-	-
		_	_	_	_	_
all mounting kit	<del>-</del>	_		_	_	_

Yes, model has this feature. Feature not available for this model.

# Hoods specifications

DOD TYPE esign family	BOX CHIMNEY	BOX CHIMNEY	BOX CHIMNEY	BOX CHIMNEY	BOX CHIMNEY	iQ 100	BOX CHIMN iQ 100
odel number Stainless steel Black or steel with black glass	LC98BA572B -	LC68BA572B -	LC97BHM50B	LC77BHM50B	LC67BHM50B	LC94BBC50B -	LC64BBC50E
White or steel with white glass Silver metallic lacquer	-	-	-	_	-	-	-
ESIGN FEATURES  opliance width (mm)	900	600	900	750	600	900	600
ay / night glass & metal fascia	-	-				-	-
uminated controls der / rocker switch control	-1-	_ _ / _	-1-	-1-	-1-	_ 	-1-
ish button control uch control	-	-	-	-	-	_	
ftTouch metal button control	-	-	-	-	-	-	-
hite electronic display ue indicator lights	-	-	-	-	-	_	-
ass canopy eight adjustable chimney sections	-	-	-	-	-	-	-
all / ceiling mounted installation	■/-	■/-	■/-	■/-	■/-	■/-	■/-
orktop integrated installation stall in, between or under furniture carcass	-		_	_	_ _	-	-
EY FEATURES notionLight Pro	-	-	_	_	_	-	-
ome Connect	-	-	-	-	-	-	-
okConnect hob based hood control mateControl sensor	-				_ _	_	
ectronic control	-		_	_	_	-	
ectronic power level display			-	-	-	-	-
rease / charcoal filter saturation indicator utomatic after running (minutes)	■ / – 10	10	_ _			_	_
terval operation B W LED glass panel		_	_	_	_	_	-
W LED light strip	-	-	-	-	-	-	-
W LED light strips W LED lights	-	-	_		_ _	_	-
W LED lights W energy-saving LED	3	2		_	_	_	-
5 W LED	-	-	2	2	2	2	2
W LED  O W low voltage halogen bulbs	-		_ _		_ _	_	
i W high voltage halogen bulbs	_	-	_ _	-	<u> </u>	-	_
ftLight with dimmer function	•	-	-	-	-	-	-
eel filter cover umber of metal grease filter cassettes	3	2	3	2	2	2	2
Iditional noise reduction insulation per grease filter	-	_	_	_	-	_	-
RFORMANCE / TECHNICAL INFORMATION		_		_		_	
sy installation system itable for ducted / recirculating operation				<b>-</b>		<b>-</b>	
traction rate in m <sup>3</sup> /h <sup>(1,2)</sup> lucted / recirculating at power level 1	300 / 170	250 / 170	260 / 180	260 / 180	260 / 170	180 / 110	190 / 110
lucted / recirculating at power level 2	380 / 290	360 / 260	340 / 260	340 / 260	330 / 250	250 / 150	260 / 150
lucted / recirculating at power level 3 lucted / recirculating at power level 4 or intensive setting 1	460 / 350 - / -	430 / 300 - / -	450 / 320 - / -	450 / 320 - / -	450 / 310 - / -	330 / 180	340 / 190 - / -
lucted / recirculating, intensive setting or intensive setting 2 ax noise level (sound pressure) based on dB(A) re 20 µPa (1,3)	860 / 440	760 / 380	710 / 370	710 / 370	720 / 370	-1-	-1-
lucted / recirculating at power level 1	32 / 43	31 / 46	40 / 51	40 / 51	40 / 51	37 / 43	37 / 44
lucted / recirculating at power level 2 lucted / recirculating at power level 3	36 / 51 36 / 54	41 / 54 46 / 57	46 / 58 53 / 62	46 / 58 53 / 62	45 / 58 52 / 61	45 / 49 52 / 54	45 / 49 51 / 54
lucted / recirculating at power level 4 or intensive setting 1 lucted / recirculating, intensive setting or intensive setting 2	- / - 54 / 59	- / - 58 / 61	-/- 62/65	- <i>l</i> -	-/- 61/64	-1-	- I - - I -
oise level (sound power) based on dB(A) re 1pW (1,4)							49 / 56
lucted / recirculating at power level 1 lucted / recirculating at power level 2	32 / 43 36 / 51	45 / 60 55 / 68	52 / 63 58 / 70	52 / 63 58 / 70	52 / 63 57 / 70	49 / 55 57 / 61	57 / 61
lucted / recirculating at power level 3 lucted / recirculating at power level 4 or intensive setting 1	41 / 54	60 / 46	65 / 74	65 / 74	64 / 73	64 / 66	63 / 66
lucted / recirculating, intensive setting or intensive setting 2	54 / 59	72 / 58	74   77	74   77	73 / 76	-1-	-1-
wer levels tensive setting / automatic intensive revert	3 2/ <b>■</b>	3 ■/■	3 ■/■	3 ■/■	3 ■/■	3 -1-	3 -/-
pe outlet diameter (mm) nimum distance above an electric / gas hob (mm)	150 / 120 550 / 650	150 / 120 550 / 650	150 / 120 550 / 650	150 / 120 550 / 650	150 / 120 550 / 650	150 / 120 550 / 650	150 / 120 550 / 650
otor power (W)	160	160	250	250	250	95	95
tal electrical loading (W) pminal voltage (V)	169 220-240	166 220-240	255 220-240	255 220-240	255 220-240	100 220-240	100 220-240
wer cable length (cm)	130	130	130	130	130	130	130
ppliance weight (kg)	23.0	21.0	17.0	12.0	14.0	16.0	14.0
fety approved ergy rating	A+	A+	B	B	B	D	D
PTIONAL ACCESSORIES circulating kit (needed if recirculating)	LZ53450	LZ53450	LZ10DXU00	LZ10DXU00	LZ10DXU00	LZ10DXU00	LZ10DXU00
circulating kit (without chimney)	_ LZ53451	_ LZ53451	LZ10DXA00	LZ10DXA00	LZ10DXA00	LZ10DXA00	LZ10DXA00
eanAir recirculating kit (stainless steel)	LZ57300	LZ57300	LZ57000	LZ57000	LZ57000	LZ57000	LZ57000
regrated cleanAir recirculating kit (plastic)	LZ56200	LZ56200	LZ10FXI00 LZ56200	LZ10FXI00 LZ56200	LZ10FXI00 LZ56200	LZ10FXI00 LZ56200	LZ10FXI00 LZ56200
generative cleanAir recirculating kit	-	-	-	-	-	-	-
generative cleanAir recirculating kit (without chimney) generative cleanAir odour filter	-	-	LZ00XXP00	LZ00XXP00	LZ00XXP00	LZ00XXP00	LZ00XXP00
0 x 720mm stainless steel back panel	-	<u>-</u>	LZ50961 -		_ _	LZ50961 -	
	-	-	-	-	LZ50661	-	LZ50661
0 x 720mm stainless steel back panel 0 x 720mm stainless steel back panel		_			-	-	-
0 x 720mm stainless steel back panel 0 x 720mm stainless steel back panel wering frame per grease filters	-	-			LZ12250	LZ12250	LZ12250
0 x 720mm stainless steel back panel 0 x 720mm stainless steel back panel wering frame per grease filters imney extension 1000mm	_ LZ12265	LZ12265	LZ12250	LZ12250			1712350
0 x 720mm stainless steel back panel 0 x 720mm stainless steel back panel wering frame per grease filters imney extension 1000mm imney extension 1500mm imney extension 1100mm	-			LZ12350 -	LZ12350 LZ12350	LZ12350 LZ12350	LZ12350 -
0 x 720mm stainless steel back panel 0 x 720mm stainless steel back panel wering frame per grease filters imney extension 1000mm imney extension 1500mm imney extension 1100mm imney extension 1100mm	_ LZ12265	LZ12265	LZ12250				LZ12350 - - -
00 x 720mm stainless steel back panel 00 x 720mm stainless steel back panel wering frame per grease filters imney extension 1000mm imney extension 1500mm imney extension 1600mm imney extension 1600mm imney extension 750mm	- LZ12265 LZ12365 - - -	LZ12265 LZ12365 - - - -	LZ12250 LZ12350 - - - -	LZ12350 - - - -	LZ12350 - - - -	LZ12350 - - - -	- - -
0 x 720mm stainless steel back panel 0 x 720mm stainless steel back panel wering frame per grease filters imney extension 1500mm imney extension 1100mm imney extension 1100mm imney extension 1600mm imney extension 570mm imney extension 500mm imney extension 500mm imney extension 500mm imney extension 500mm ft / right inclined roof adapter ont / back inclined roof adapter	- LZ12265 LZ12365 - - - - -	LZ12265 LZ12365 - - - - - -	LZ12250 LZ12350 - - - - - - -	LZ12350	LZ12350 - - - - - - -	LZ12350 	- - - - -
10 x 720mm stainless steel back panel 10 x 720mm stainless steel back panel wering frame per grease filters imney extension 1000mm imney extension 1100mm imney extension 1100mm imney extension 1600mm imney extension 1600mm imney extension 750mm	- LZ12265 LZ12365 - - - -	LZ12265 LZ12365 - - - - - -	LZ12250 LZ12350 - - - - -	LZ12350 - - - - -	LZ12350 - - - - - -	LZ12350  - - - -	- - - -

Yes, model has this feature.Feature not available for this model.

<sup>&</sup>lt;sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>&</sup>lt;sup>1</sup> Air flow and noise declarations made in line with CECED Code Of Conduct <sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>3</sup> Sound pressure measured according to EN60704–2–13 on largest pipe diameter

<sup>4</sup> Sound power measured according to EN60704–3 on largest pipe diameter

<sup>&</sup>lt;sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>&</sup>lt;sup>3</sup> Sound pressure measured according to EN60704–2–13 on largest pipe diameter <sup>4</sup> Sound power measured according to EN60704–3 on largest pipe diameter

**Hoods** | Specifications Specifications | Hoods

# Hoods specifications

NSTALLATION TYPE HOOD TYPE Design family	SLIM PYRAMID IQ 300	SLIM PYRAMID	PYRAMID iQ 100	PYRAMID iQ100
Model number Stainles	s steel –	_	LC94PBC50B	LC64PBC50B
Black or steel with blac White or steel with whit	e glass –	LC67QFM50B	-	
Silver metallic la ESIGN FEATURES	acquer –	-	-	-
ppliance width (mm)	900	600	900	600
ay / night glass & metal fascia uminated controls	-	-	-	
ider / rocker switch control ush button control	-I- -	-1-	- <i>l</i> -	-1-
ouch control			-	-
ftTouch metal button control hite electronic display	<del>-</del>	-	-	
ue indicator lights			-	-
lass canopy eight adjustable chimney sections	-	-	-	-
all / ceiling mounted installation orktop integrated installation	■1-	■ / - -	<b>I</b> / -	■/- -
stall in, between or under furniture carcass	_	-	-	_
EY FEATURES notionLight Pro	_	-	-	-
ome Connect	-	-	-	-
okConnect hob based hood control mateControl sensor	-	-	-	
ectronic control			-	
ectronic power level display	-	-	-	_
ease / charcoal filter saturation indicator		-	-	
terval operation	-	-	-	-
B W LED glass panel W LED light strip		-	-	
W LED light strips	-	-	-	-
W LED lights W LED lights	-	-	-	
W energy-saving LED 5 W LED	2	2	_ 2	_ 2
W LED	-	-	-	-
D W low voltage halogen bulbs D W high voltage halogen bulbs	-	-	-	
) W bulbs	-	-	-	_
oftLight with dimmer function eel filter cover	-	-	-	
umber of metal grease filter cassettes dditional noise reduction insulation	3 -	2	3 -	2
per grease filter	-	-	-	_
ERFORMANCE / TECHNICAL INFORMATION asy installation system				
uitable for ducted / recirculating operation extraction rate in m³/h (1,2)	■/■	■/■	■/■	■/■
ducted / recirculating at power level 1	270 / 190	250 / 180	190 / 120	180 / 110
lucted / recirculating at power level 2 lucted / recirculating at power level 3	350 / 270 460 / 340	330 / 270 440 / 320	250 / 160 360 / 200	240 / 160 360 / 200
lucted / recirculating at power level 4 or intensive setting	1 -/-	-1-	-1-	-1-
lucted / recirculating, intensive setting or intensive settin ax noise level (sound pressure) based on dB(A) re 20 μ		710 / 380	-1-	-1-
lucted / recirculating at power level 1 lucted / recirculating at power level 2	38 / 52 45 / 59	41 / 46 47 / 56	38 / 44 45 / 50	38 / 43 46 / 50
ducted / recirculating at power level 3	52 / 62	53 / 60	53 / 55	54 / 55
flucted / recirculating at power level 4 or intensive setting flucted / recirculating, intensive setting or intensive settin	1 -/- g 2 61 / 65	- / - 61 / 64	- I - - I -	- I - - I -
oise level (sound power) based on dB(A) re 1pW (1,4)				
lucted / recirculating at power level 1 lucted / recirculating at power level 2	50 / 64 57 / 71	53 / 58 59 / 68	50 / 56 57 / 62	50 / 55 58 / 62
lucted / recirculating at power level 3 lucted / recirculating at power level 4 or intensive setting	64 / 74	65   72	65   67 -   -	66 I 67 - I -
lucted / recirculating, intensive setting or intensive settin	g 2 73 / 77	73 / 76	-1-	-1-
ower levels tensive setting / automatic intensive revert	3	3 ■/■	3 -1-	3 -/-
pe outlet diameter (mm)	150 / 120	150 / 120	150 / 120	150 / 120
inimum distance above an electric / gas hob (mm) otor power (W)	550 / 650 250	550 / 650 250	550 / 650 95	550 / 650 95
tal electrical loading (W)	255 220-240	255	100	100
ominal voltage (V) ower cable length (cm)	130	220-240 130	220-240 130	220-240 130
B plug opliance weight (kg)	16.0	14.0	13.0	11.0
fety approved			•	
nergy rating PTIONAL ACCESSORIES	A	A	С	С
circulating kit (needed if recirculating)	LZ10DXU00	LZ10DXU00	LZ52750	LZ52750
placement active carbon filter	LZ10DXA00	LZ10DXA00	LZ52751	LZ52751
eanAir recirculating kit (stainless steel) tegrated cleanAir recirculating kit (plastic)	LZ57000 LZ10FXI00	LZ57000 LZ10FXI00	-	-
eanAir replacement active carbon filter	LZ56200	LZ56200	-	-
generative cleanAir recirculating kit generative cleanAir recirculating kit (without chimney)	-	-	-	
generative cleanAir odour filter	LZ00XXP00	LZ00XXP00	-	-
00 x 720mm stainless steel back panel 00 x 720mm stainless steel back panel	LZ50961 -	-	LZ50961 -	
00 x 720mm stainless steel back panel		LZ50661	-	LZ50661
wering frame per grease filters	-	-	-	
nimney extension 1000mm nimney extension 1500mm	LZ12250 LZ12350	LZ12250 LZ12350	-	-
nimney extension 1100mm	-	-	-	-
nimney extension 1600mm nimney extension 750mm	-	-	_ LZ12340	LZ12340
nimney extension 500mm	-	-	LZ12240	LZ12240
ont / back inclined roof adapter ont / back inclined roof adapter	-	-	-	
all mounting kit	-	-	-	-
emote control	<del>-</del>	-	-	
andle strip	_	_	_	_

<sup>-</sup> Feature not available for this model.

# Hoods specifications

HOOD TYPE Design family	TELESCOPIC IQ 700	TELESCOPIC iQ 700	TELESCOPIC TQ 500	TELESCOPIC iQ 500	TELESCOPIC IQ 300	TELESCOPIC IQ 300
Model number Stainless steel	-	-	-	-		
Black or steel with black glass White or steel with white glass	LI99SA683B -	LI69SA683B -	-	-	-	_
Silver metallic lacquer ESIGN FEATURES	-	-	LI97SA560B	LI67SA560B	LI94MA530B	LI64MA530B
opliance width (mm)	900	900	900	600	900	600
ay / night glass & metal fascia uminated controls	-	-	-	-	-	_
ider / rocker switch control	-	-	-	-	-	-
ush button control	-	-	-	-	-	
ftTouch metal button control	-	-				
/hite electronic display lue indicator lights	-	-	-		-	_
lass canopy	-	-	-	-	-	_
eight adjustable chimney sections /all / ceiling mounted installation	-	-	-	-	-	-
/orktop integrated installation	-	_	-	_	_	_
nstall in, between or under furniture carcass					-	-
EY FEATURES motionLight Pro	-	-	-	-	-	_
ome Connect	-	-	-	-	-	-
ookConnect hob based hood control limateControl sensor	-	-	-	-		_
lectronic control	•					
emote control lectronic power level display	-	-	-	-	-	_
rease / charcoal filter saturation indicator		•		•		
utomatic after running (minutes)	10	10	10	10	10	10
nterval operation 8 W LED glass panel	-	-	-	-	-	-
W LED light strip W LED light strips	-	_	-	-	-	_
W LED lights		-		-	-	
W LED lights	_		_		=	
W energy-saving LED .5 W LED	-	-	-	-	-	-
W LED	-	-	-	-	-	-
0 W low voltage halogen bulbs 5 W high voltage halogen bulbs	-	_	-	-	-	_
0 W bulbs	-	-	-	-	-	-
oftLight with dimmer function teel filter cover	-	-	-	-	-	_
lumber of metal grease filter cassettes	3	2	3	3	3	2
dditional noise reduction insulation aper grease filter		-	-	-	-	_
ERFORMANCE / TECHNICAL INFORMATION						
asy installation system uitable for ducted / recirculating operation	<b>-</b>	<b>=</b>	<b>=</b> / <b>=</b>	<b>-</b>	<b>-</b>	<b>-</b>
xtraction rate in m³/h <sup>(1,2)</sup>	200 / 400	200 / 200	240.1420	240/420	470 / 400	470 / 400
ducted / recirculating at power level 1 ducted / recirculating at power level 2	290 / 190 380 / 340	290 / 200 380 / 350	210 / 130 310 / 220	210 / 130 310 / 220	170 / 100 230 / 140	170 / 100 230 / 130
ducted / recirculating at power level 3	520 / 460	520 / 480	400 / 290	400 / 290	270 / 160	270 / 160
ducted / recirculating, intensive setting or intensive setting 2 lax noise level (sound pressure) based on dB(A) re 20 μPa (1.3)	940 / 700	940 / 760	700 / 480	700 / 480	420 / 180	420 / 170
ducted / recirculating at power level 1	27 / 32	27 / 32	28 / 31	28 / 31	39 / 43	39 / 43
ducted / recirculating at power level 2 ducted / recirculating at power level 3	34 / 46 42 / 53	34 / 46 42 / 53	35 / 41 40 / 74	35 / 41 40 / 74	41 / 51 46 / 56	41 / 51 46 / 56
ducted / recirculating at power level 3 ducted / recirculating, intensive setting or intensive setting 2	56 / 63	56 / 63	52 / 60	52 / 60	56 / 57	56 / 58
oise level (sound power) based on dB(A) re 1pW (1,4)	41 / 49	41 / 49	42 / 45	42 / 45	52./57	53 / 57
ducted / recirculating at power level 1 ducted / recirculating at power level 2	49 / 62	49 / 62	42 / 45 49 / 55	49 / 55	53 / 57 55 / 65	55 / 65
ducted / recirculating at power level 3	56 / 68	56 / 68	54 / 61	54 / 61	60 / 70	60 / 70
ducted / recirculating, intensive setting or intensive setting 2 ower levels	70 / 79	70 / 79	66 / 74	66 / 74	70 / 71	70 / 72
ntensive setting / automatic intensive revert	2/■	2/■	2/■	2/■	1 / ■	1/■
pe outlet diameter (mm) linimum distance above an electric / gas hob (mm)	150 / 120 430 / 650	150 / 120 430 / 650	150 / 120 430 / 650	150 / 120 430 / 650	150 / 120 430 / 650	150 / 120 430 / 650
lotor power (W)	260	260	140	140	70	70
otal electrical loading (W) ominal voltage (V)	266 220-240	266 220-240	146 220-240	146 220-240	76 220-240	76 220-240
ommar voltage (v) ower cable length (cm)	175	175	175	175	175	175
B plug	30.0	30.0	26.0	28.0	12.0	12.0
ppliance weight (kg) afety approved	28.0	28.0	26.0	20.0	12.0	12.0
nergy rating PTIONAL ACCESSORIES	A	A	A	А	A	A
ecirculating kit (needed if recirculating)	LZ45650	LZ45650	LZ45650	LZ45650	LZ45450	LZ45450
ecirculating kit (without chimney)	-	LZ45610	LZ45610	LZ45610	-	- 174FF10
eplacement active carbon filter eanAir recirculating kit (stainless steel)	LZ45610 LZ46830	LZ45610 LZ46830	LZ45610 LZ46830	LZ45610 LZ46830	LZ45610 LZ46830	LZ45510 LZ46830
ntegrated cleanAir recirculating kit (plastic)	-	-	-	-	-	_
eanAir replacement active carbon filter egenerative cleanAir recirculating kit	LZ46810 -	LZ46810 -	LZ46810 -	LZ46810 -	LZ46810 -	LZ46810 -
egenerative cleanAir recirculating kit (without chimney)	-	-	-	-	-	_
egenerative cleanAir odour filter 00 x 720mm stainless steel back panel	-	_ _	-	-	-	_
	-	-	-	-	-	-
	LZ49600	LZ46600	LZ49600	LZ46600	-	LZ46600
00 x 720mm stainless steel back panel			-	-	-	
10 x 720mm stainless steel back panel wering frame per grease filters	-		-	-	-	_
0 x 720mm stainless steel back panel wering frame per grease filters imney extension 1000mm	-	=				_
00 x 720mm stainless steel back panel owering frame oper grease filters only in the steel of the	- - - -	- - -	-	-	-	_
00 x 720mm stainless steel back panel owering frame paper grease filters himney extension 1000mm himney extension 1100mm himney extension 1100mm himney extension 1600mm	- - - -	- - -		-		-
00 x 720mm stainless steel back panel owering frame pper grease filters himney extension 1000mm himney extension 1500mm himney extension 1100mm himney extension 1600mm himney extension 750mm	- - -	-	-	-	-	- - -
00 x 720mm stainless steel back panel owering frame per grease filters himney extension 1000mm himney extension 1500mm himney extension 1100mm himney extension 1600mm himney extension 1600mm himney extension 750mm himney extension 500mm himney in the film of	- - - - -	- - - - -	- - -	- - - -	- - -	- - -
00 x 720mm stainless steel back panel 00 x 720mm stainless steel back panel 00 x 720mm stainless steel back panel owering frame aper grease filters himney extension 1000mm himney extension 1500mm himney extension 1100mm himney extension 1600mm himney extension 750mm himney extension 500mm fit / right inclined roof adapter ont / back inclined roof adapter	- - - - - -	- - - - - -	- - - - -	- - - - -	- - - -	-
00 x 720mm stainless steel back panel owering frame per grease filters himney extension 1000mm himney extension 1500mm himney extension 1100mm himney extension 1600mm himney extension 1600mm himney extension 750mm himney extension 500mm himney in the film of	- - - - -	- - - - -	- - - -	- - - -	- - - - -	- - -
00 x 720mm stainless steel back panel owering frame sper grease filters himney extension 1000mm himney extension 1500mm himney extension 1100mm himney extension 1600mm himney extension 750mm himney extension 750mm himney extension 500mm eft / right inclined roof adapter ont / back inclined roof adapter all mounting kit	- - - - - -		- - - - -	- - - - -	- - - - - -	- - -

Yes, model has this feature.

<sup>&</sup>lt;sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>&</sup>lt;sup>4</sup> Sound power measured according to EN60704–3 on largest pipe diameter

<sup>&</sup>lt;sup>1</sup> Air flow and noise declarations made in line with CECED Code Of Conduct <sup>2</sup> Measured according to EN61591 on largest pipe diameter

<sup>&</sup>lt;sup>3</sup> Sound pressure measured according to EN60704–2–13 on largest pipe diameter <sup>4</sup> Sound power measured according to EN60704–3 on largest pipe diameter

Feature not available for this model.


**Hoods |** Specifications Technical diagrams | Hoods

# Hoods specifications


HOOD TYPE Design family	CANOPY iQ 700	CANOPY iQ 500	CANOPY iQ 500	CANOPY iQ 500	CANOPY iQ 300	CANOPY iQ 100	INTEGRATED IQ 100	iQ 10
Model number Stainless steel Black or steel with black glass	-	-	-	-	-	-	-	-
White or steel with white glass	- LD70F0F0B	- LD705746D	- LDE7E746D	- LD755646D	-	- LD222646D	- -	-
Silver metallic lacquer DESIGN FEATURES	LB79585GB	LB78574GB	LB57574GB	LB75564GB	LB55564GB	LB23364GB	LE66MAC00B	LE63MA
Appliance width (mm) Day / night glass & metal fascia	700	700	520	730	530	530	599	599
lluminated controls	_	=	-	-	-	-	_	-
Slider / rocker switch control Push button control	-	-	-	<b>■</b> /-	<b>■</b> /-	-/=	-	-
Touch control	-	-	=	_	_	_	-	-
oftTouch metal button control White electronic display	-	-	-	-	-	-	_	_
Blue indicator lights	_	=	_	_	_	-	_	-
Glass canopy		-	-	-	-	-	-	-
Height adjustable chimney sections Wall / ceiling mounted installation	_		-	_	_	-	_	_
Vorktop integrated installation	-	-	-	-	_	-	-	-
nstall in, between or under furniture carcass KEY FEATURES	-					_	_	
emotionLight Pro	-	-	-	-	-	-	-	-
lome Connect ookConnect hob based hood control	_		-	_	_		-	-
limateControl sensor	-	-	-	-	_	-	-	-
Electronic control Remote control		•	-	_	-	-	_	-
lectronic power level display	-	-	-		_	-	_	
Grease / charcoal filter saturation indicator	<b>■</b> /-	-	-	-	-	-	-	-
automatic after running (minutes) nterval operation	10	-	-	-	_	-	-	-
8 W LED glass panel	-	-	-	-	-	-	-	-
W LED light strip W LED light strips	_		-	_	-	-	_	-
W LED lights	-	-	-	-	-	-	-	-
W LED lights W energy-saving LED	-	-	-	_	-	-	2	- 2
.5 W LED	-	-	-	-	-	-	-	-
W LED O W low voltage halogen bulbs	2	2	2	2	2	-	-	-
5 W high voltage halogen bulbs	-	-	-		-	-	-	
-0 W bulbs	-	-	-	-	-	2	-	-
oftLight with dimmer function iteel filter cover		-	-	-	-	-	-	
Number of metal grease filter cassettes	2	2	1	2	2	-	2	2
dditional noise reduction insulation aper grease filter	-	_	-	_		-	_	-
ERFORMANCE / TECHNICAL INFORMATION								
asy installation system uitable for ducted / recirculating operation		_ <b>=</b> /=		=/=	= / ■			<b>=</b> /
xtraction rate in m³/h (1,2)								
ducted / recirculating at power level 1 ducted / recirculating at power level 2	220 / 200 380 / 240	340 / 210 540 / 270	290 / 210 450 / 260	280 / 240 320 / 250	260 / 180 350 / 250	150 / 130 210 / 180	250 / 220 350 / 330	240 / 280 /
ducted / recirculating at power level 2	570 / 320	630 / 300	560 / 290	400 / 320	400 / 320	-1-	620 / 410	360
ducted / recirculating at power level 4 or intensive setting 1	-/-	-/-	-/-	-1-	-1-	-1-	-1-	- 1
ducted / recirculating, intensive setting or intensive setting 2  Max noise level (sound pressure) based on dB(A) re 20 µPa (1.3)	770 / 370	730 / 310	610 / 300	650 / 430	650 / 430	280 / 240	-1-	-1
ducted / recirculating at power level 1	28 / 51	39 / 67	36 / 52	38/40	41 / 45	41 / 41	35 / 48	38 /
ducted / recirculating at power level 2 ducted / recirculating at power level 3	41 / 54 51 / 59	49 / 57 52 / 59	49 / 57 53 / 60	44 / 48 47 / 52	47 / 53 50 / 55	48 / 48	42 / 57 56 / 61	42
ducted / recirculating at power level 4 or intensive setting 1	-1-	-1-	-1-	-1-	-1-	-1-	-1-	-1
ducted / recirculating, intensive setting or intensive setting 2 loise level (sound power) based on dB(A) re 1pW (1.4)	58 / 63	55 / 60	56 / 61	58 / 60	57 / 59	54 / 55	-1-	-1
ducted / recirculating at power level 1	42 / 65	53 / 67	50 / 66	50 / 52	53 / 57	53 / 53	51 / 62	54 /
ducted / recirculating at power level 2 ducted / recirculating at power level 3	55 / 68 65 / 73	63 / 71 66 / 73	63 / 71 67 / 74	56 / 60 59 / 64	59 / 65 62 / 67	60 / 60	57 / 71 70 / 75	60 / 64 /
ducted / recirculating at power level 3 ducted / recirculating at power level 4 or intensive setting 1	-1-	-1-	-1-	-1-	-1-	-1-	-1-	- /
ducted / recirculating, intensive setting or intensive setting 2	72   77	69 / 74	70 / 75	70/72	69 / 71	66 / 67	-1-	- 1
ower levels ntensive setting / automatic intensive revert	3	3 ■/■	3 ■/■	3	3 ■/-	2 ■1-	3 -1-	-1
ipe outlet diameter (mm)	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120	120	150 / 120	150 /
Minimum distance above an electric / gas hob (mm) Motor power (W)	500 / 650 270	500 / 650 275	500 / 650 250	650 / 650 200	650 / 650 200	650 / 650 170	650 / 650 250	650
otal electrical loading (W)	272	277	252	240	240	250	256	12
lominal voltage (V) ower cable length (cm)	220-240 130	220-240 130	220-240 130	220-240 130	220-240 130	220-240 130	220-240 150	220- 15
iB plug								
oppliance weight (kg) afety approved	9.0	9.0	7.0	7.0	8.0	5.3	11.0	10
nergy rating	A	С	С	D	D	E	В	
PTIONAL ACCESSORIES ecirculating kit (needed if recirculating)	LZ55750	LZ55750	LZ55750	LZ74020	LZ74020	LZ72040	-	
ecirculating kit (without chimney)	-	-	-	-	-	-	-	-
eplacement active carbon filter	LZ55651	LZ55651	LZ55651	LZ73050	LZ73050	LZ73040	LZ10IMA00	LZ10II
leanAir recirculating kit (stainless steel) ntegrated cleanAir recirculating kit (plastic)	-	-	-	-	-	-	-	-
leanAir replacement active carbon filter	-	-	-	-	-	-	-	-
egenerative cleanAir recirculating kit egenerative cleanAir recirculating kit (without chimney)	-	-	-	-	-	-	-	-
egenerative cleanAir odour filter	-	-	-	-	-	-	-	-
00 x 720mm stainless steel back panel 00 x 720mm stainless steel back panel		<u> </u>	-		-	-		-
00 x 720mm stainless steel back panel	-	-	-	-	-	-	-	-
owering frame aper grease filters	-	-	-	-	-	LZ23000	-	-
himney extension 1000mm	_	_		_	-	LZZ3000 -	_	-
himney extension 1500mm	-	-	-	-	-	-	-	-
Chimney extension 1100mm Chimney extension 1600mm	-	-	-	-	-	-	-	-
himney extension 750mm	-	-	-	-	-	-	-	-
himney extension 500mm eft / right inclined roof adapter	_	_	-	_	-	-	_	-
	-	-	=	-	-	-	-	-
				-	_	_	_	-
Vall mounting kit	-	_	-					
ront / back inclined roof adapter Vall mounting kit lownDraft remote motor mounting kit lemote control	- LZ75956	_ _ _	-	_ _ _	-	-	-	-

# Hood technical diagrams

# Domino hood LF16VA570B




The air outlet and control unit can be swapped with one another. If required, the control unit can be secured to the kitchen units wall.




\* The air outlet and control unit can be swapped with one another If required, the control unit can be secured to the kitchen unit wall

#### Combination: 2 × ventilation elements, 3 × Dominos 30 cm

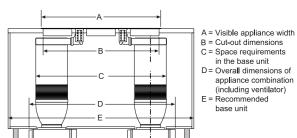



Combination options with corresponding appliances and cut-out dimensions Width type: (cm) 10 | 30 | 40 | 80 | Appliance width: (mm) 94 | 302 | 392 | 812

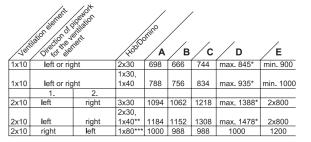


- \* Dimensions may be smaller depending on the position of the control unit.
- \*\* Pipework must not run underneath a barbecue grill/deep fryer/teppanyaki/lava grill.
  \*\*\* Control units must be placed on the kitchen unit wall.

#### downDraft hood LD97DBM60B

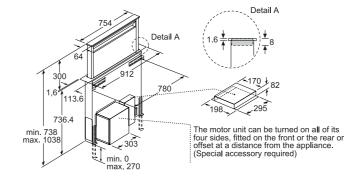


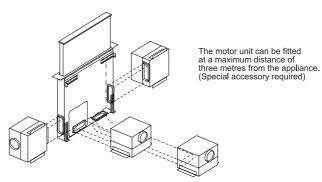



- Use with gas hob only possible in air extraction mode. Maximum total power 13.4 kW
- \*\* 650 mm depth only in combination with slim hobs.


  \*\* min. 750 mm for hobs with 500 mm cut-out depth.




<sup>&</sup>lt;sup>4</sup> Sound power measured according to EN60704–3 on largest pipe diameter


# Hood technical diagrams

# Ceiling hood LF959RE55B







A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.




# Ceiling hood LF959RB51B and LF959RB21B







A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.





## Island cube hood LF31IVV60







# Island chimney hood LF91BA582B










# Island chimney hood LF98GB542B








## Cube hood LC37IVV60B









Hoods | Technical diagrams Technical diagrams | Hoods

# Hood technical diagrams


Angled chimney hoods LC91KWW60B and LC91KWW20B

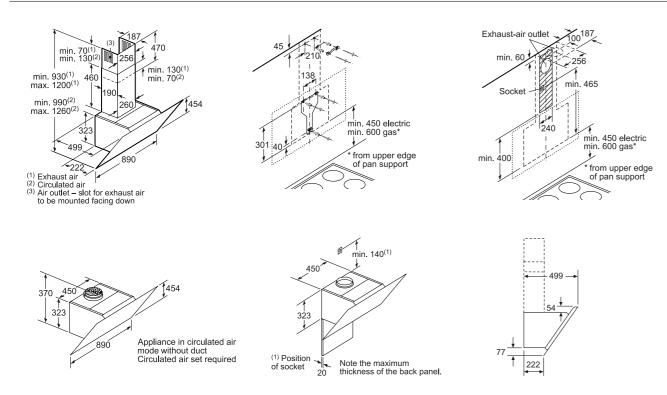


# Angled chimney hood LC87KBM60B

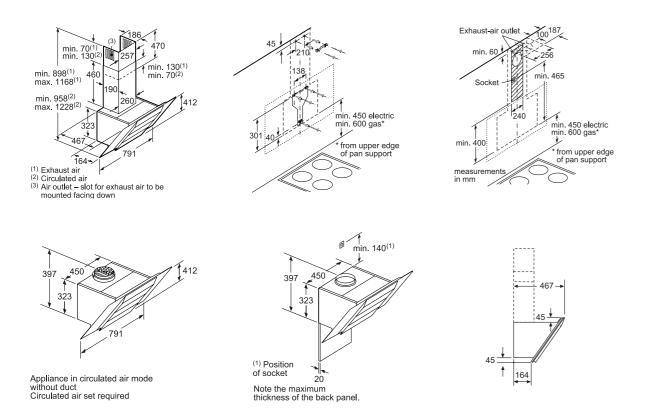

# Angled chimney hoods LC87KHM60B and LC67KHM60B

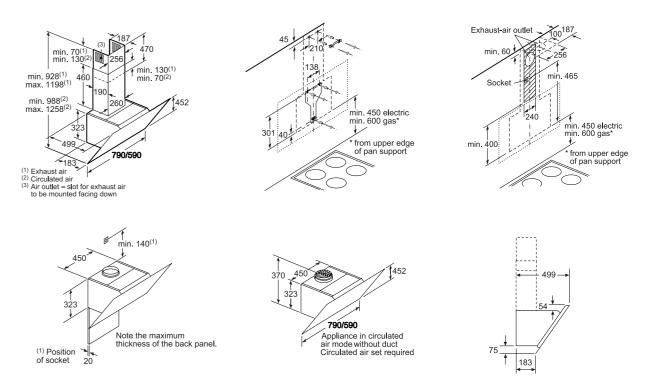


## Flat chimney hoods LC97FVW60B and LC97FVW20B

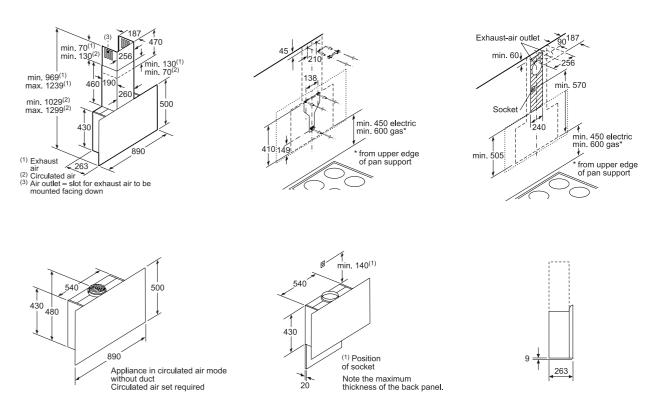


Hoods | Technical diagrams | Hoods

# Hood technical diagrams


# Straight glass chimney hoods LC97GHM50B and LC67GHM50B

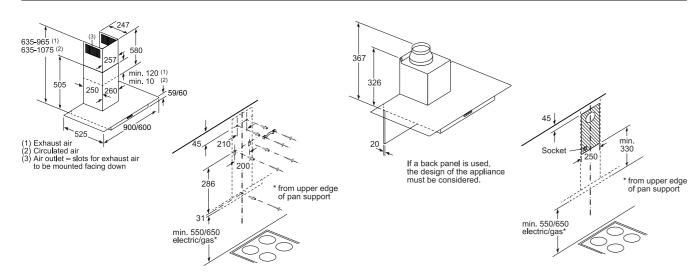


## Curved glass chimney hoods LC97AFM50B and LC67AFM50B

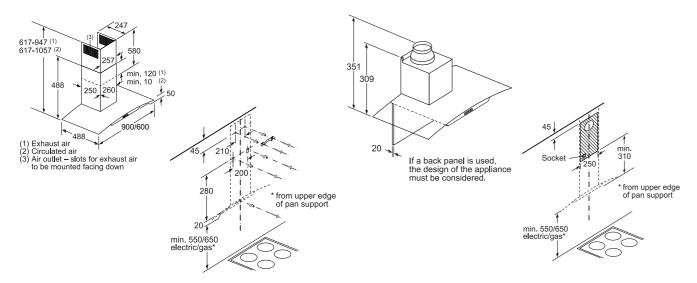


## Box chimney hoods LC98BA572B and LC68BA572B

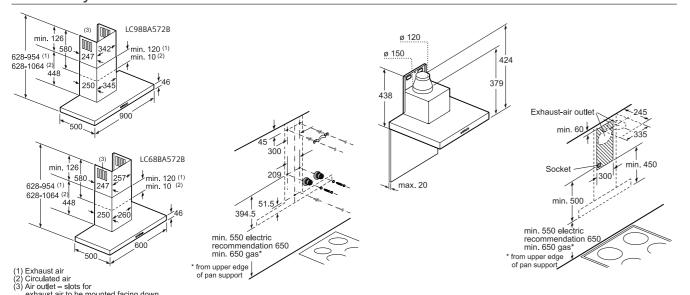


# Box chimney hoods LC97BHM50B, LC77BHM50B and LC67BHM50B

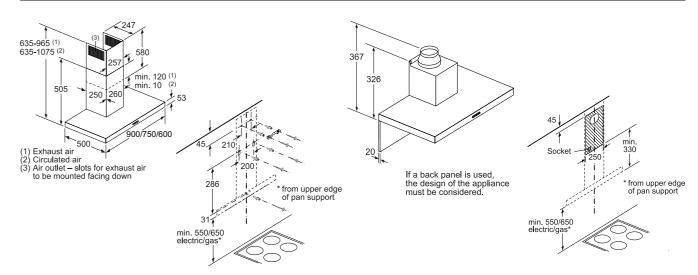

## Box chimney hoods LC94BBC50B and LC64BBC50B

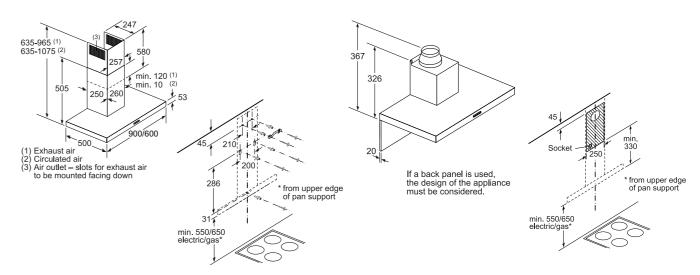


# Slim pyramid chimney hoods LC97QFM50B and LC67QFM50B

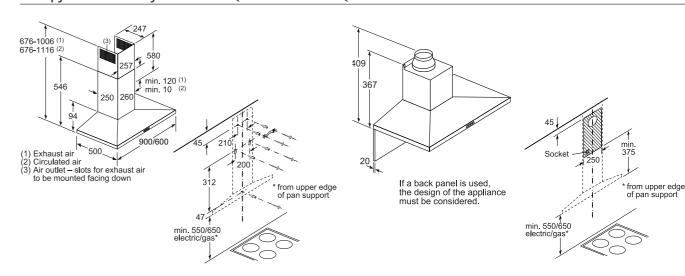



Hoods | Technical diagrams | Hoods

# Hood technical diagrams


# Pyramid chimney hoods LC94PBC50B and LC64PBC50B










# Telescopic hood LI99SA683B










## Telescopic hood LI69SA683B








## Telescopic hoods LI97SA560B and LI67SA560B

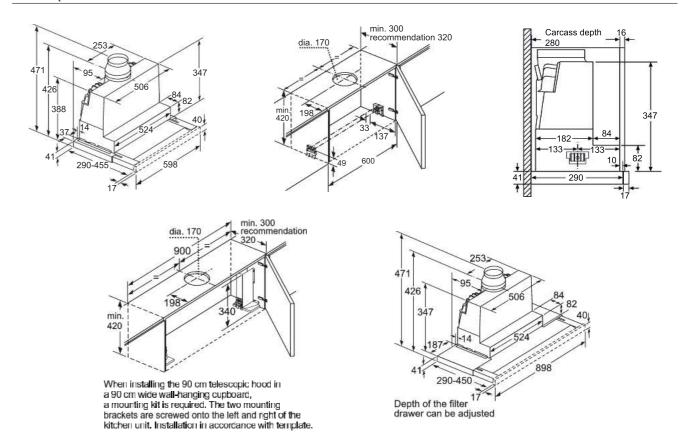



# Telescopic hoods LI94MA530B and LI64MA530B

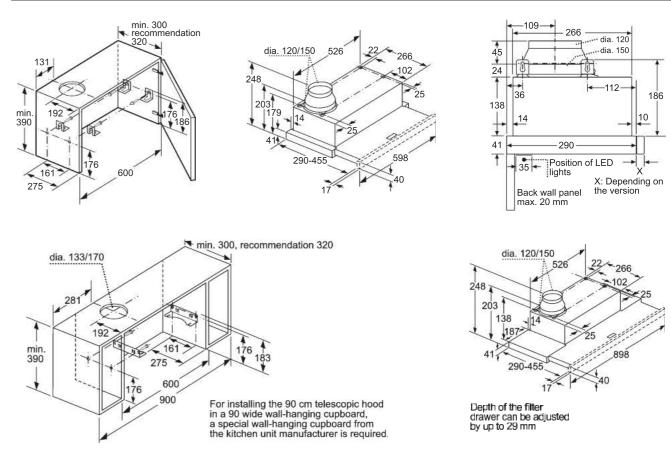


# Hood technical diagrams


Canopy hoods LB79585GB and LB78574GB










# Canopy hood LB23364GB










# Canopy hood LB57574GB









# Integrated hoods LE66MAC00B and LE63MAC00B






# Canopy hood LB75564GB

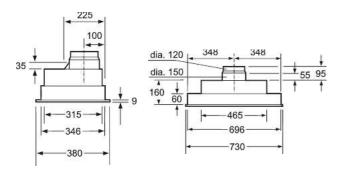

# Canopy hood LB55564GB

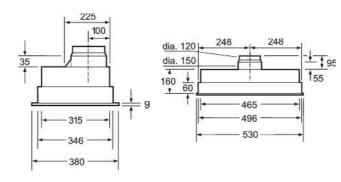

# Built-in cooling specifications

APPLIANCE TYPE	aCool FRIDGE FREEZER		RIDGES	:0700		REEZERS	700	aCool WINE COOL
Design family	iQ 700	<b>iQ 700</b> CI30RP01	iQ 700 CI24RP01	<b>iQ700</b> FI18NP31	<b>iQ700</b> FI24NP31	iQ 700	<b>iQ</b> 700 FI24DP02	(Q 700 CI24WP02
Model number PERFORMANCE AND CONSUMPTION	CI36BP01	CISURPUT	CIZ4RPUT	FITONPST	FIZ4INP3 I	FI24DP32	FIZ4DP0Z	CIZ4WPUZ
Energy efficiency class	A+	A+	A+	A+	A+	A+	A+	В
Annual energy consumption¹ (kWh)	423	182	169	347	359	347	347	237
Unit net capacity (litres)	380	479	369	306	324	306	306	390
Separate compartment with	146	-	-	-	J24 =	-	-	
other temperature net capacity (litres)	140							-
Noise level (dB)	42	40	40	41	41	41	41	42
DESIGN FEATURES	12	10	.0					
Type of hinge	Flat	Flat	Flat	Flat	Flat	Flat	Flat	_
Reversible door	-	Right	Right	Left	Left	Left	Right	Right
neversible door		reversible	reversible	non-reversible	reversible	non-reversible	non-reversible	reversible
Light	_							_
Number of compressors	2	1	1	1	1	1	1	1
Number of cooling circuits	2	1	1	1	1	1	1	1
Number of temperature zones in fridge	1	2	2	-	_	-	-	_
FOOD FRESHNESS SYSTEM								
multiAirflow System				-	-	-	-	-
multiAirflow tower		-	_					-
airFresh filter				_	_	_	_	_
0° temperature controlled drawer	_	hyperFresh	_	_	_	_	-	-
KEY FEATURES – FRIDGE SECTION								
Number of shelves	3	4	4	-	-	-	-	14
Number of adjustable shelves	2	3	3	-	-	-	-	-
Vegetable containers with ribbed	crisperBox /	hyperFresh /	hyperFresh /	_	-	_	-	_
bottom & humidity control	chiller box	freshProtectbox	freshProtectbox					
Number of door shelves	4	3	3	-	-	-	-	-
Number of door bins	2	2	2	-	-	-	-	-
Type of shelves	-		Fully extendable	-	-	-	-	-
Material of the shelves	Glass	Glass	Glass	-	-	-	-	-
Thermometer	-	Digital	Digital	-	-	-	-	-
Fast cooling switch				-	-	-	-	-
Interior ventilation				-	-	-	-	
KEY FEATURES – FREEZER SECTION								
Frost build up	noFrost	-	-	noFrost	noFrost	noFrost	noFrost	-
Number of drawers with telescopic rails	-	-	-	2	2	2	2	-
Number of shelves	-	-	-	2	3	2	2	-
Shelf adjustability	-	-	-					-
Number of door bins	-	-	_	2	5	2	2	-
Door bin adjustability	-	-	_	-		-	-	-
Freezing capacity (kg/24h)	22	-	_	14	18	14	14	_
Storage period in event of power failure (h)	22	_	_	14	17	14	14	_
Fast freezing switch		_	_					_
Thermometer	-	_	_	Digital	Digital	Digital	Digital	-
Ice and water dispenser features	Automatic ice maker	-	-	Drinking water dispenser, crushed ice, ice cube, child lock, on/off switch, LED-light,	-	Drinking water dispenser, crushed ice, ice cube, child lock, on/off switch, LED-light,	Drinking water dispenser, crushed ice, ice cube, child lock, on/off switch, LED-light,	-
				anti-clump ice		anti-clump ice	anti-clump ice	
FUNCTIONS								
Temperature display – fridge	LED display	LED display	LED display	_	-	_	-	LED display
Warning signal door open	Acoustic	Acoustic	Acoustic	-	-	-	-	Acoustic
Warning / malfunction signal	-	Economy setting/ holiday mode, warning signal door open	Economy setting/ holiday mode, warning signal door open	Audible/visual	Audible/visual	Audible/visual	Audible/visual	-
Temperature adjustable								
Type of control setting and signalling devices	-	Warning signal door open	Warning signal door open	Warning function freezer, warning signal door open	Warning function freezer, warning signal door open	Warning function freezer, warning signal door open	Warning function freezer, warning signal door open	Warning signal door open
ACCESSORIES								
Included accessories	1 x connection hose, 1 x egg tray	1 x egg tray	1 x egg tray	1 x connection hose	-	1 x connection hose	1 x connection hose	-
Optional accessories	-	CI10Z090 CI30Z000 CI30Z100 CI60Z000 CI60Z100 FI30Z090	C110Z090 C124Z000 C124Z100 C160Z000 C160Z100 F124Z090	CI10Z090 CI60Z000 CI60Z100 FI24Z290 FI24Z300 FI50Z000	CI10Z090 CI60Z000 CI60Z100 FI24Z000 FI24Z090 FI24Z100 FI50Z000	CI10Z090 CI60Z000 CI60Z100 FI24Z290 FI24Z300 FI50Z000	C110Z090 C160Z000 C160Z100 F124Z200 F124Z290 F150Z000	-
DIMENSIONS AND INSTALLATION								
Climate class <sup>2</sup>	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T
Height of the product (mm)	2125	2125	2125	2125	2125	2125	2125	2125
	908	756	603	451	603	603	603	603
	200			608	608	608	608	608
Width of the product (mm)	608	608						
Width of the product (mm) Depth of the product (mm)	608 1135	608 1440	608 1287					
Width of the product (mm) Depth of the product (mm) Depth with open door 90° (mm)	608 1135	1440	1287	1287	1287	1287	1287	1257
Width of the product (mm) Depth of the product (mm) Depth with open door 90° (mm) Adjustable feet	1135	1440	1287	1287	1287	1287	1287	1257
Width of the product (mm) Depth of the product (mm) Depth with open door 90° (mm)	1135	1440	1287	1287	1287	1287	1287	1257

Actual energy consumption will depend on how the appliance is used and where it is located.

2Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone ST = designed to operate in ambient temperature of +16°C to 32°C.

Climate zone ST = designed to operate in ambient temperature of +18°C to 38°C.

Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE			AMERICAN FRIDGE FREEZER		
Design family	iQ 700	iQ 700	iQ 500	iQ 300	iQ 300
Model number Stainless steel antiFingerprint	-	KA92DAI20G	KA90DVI20G	KA90IVI20G	KA90NVI20G
Black	KA92NLB35G	-	-	-	-
PERFORMANCE AND CONSUMPTION					
Energy efficiency class	A++	A+	A+	A+	A+
Annual energy consumption <sup>1</sup> (kWh)	385	443	432	475	436
Total unit net capacity (litres)	592	541	523	573	533
Refrigerator net capacity (litres)	375	368	360	373	370
Freezer net capacity (litres)	217	173	163	200	163
Noise level (dB)	43	43	43	44	43
DESIGN FEATURES					
Colour of side panels	Chrome inox-metallic	Chrome inox-metallic	Grey	Grey	Grey
Type of vertical handle	Integrated	Bar	Bar	Bar	Bar
Door hinge	Left & right	Left & right	Left & right	Left & right	Left & right
Light	•				
Number of compressors	1	1	1	1	1
Number of cooling circuits	2	2	1	1	1
Number of evaporators	2	2	1	1	1
FOOD FRESHNESS SYSTEM					
Range of temperature (°C)	-		-	-	-
Humidity control drawer		•	-	-	-
Antibacterial air filter	_				
multiAirflow System	-	_	-		-
Temperature adjustable	-		-	-	
Food preservation containers	Vegetable / salad drawer	Vegetable / salad drawer	2 x Vegetable /	2 x Vegetable /	2 x Vegetable /
r dou preservation containers	hyperFresh Plus box	hyperFresh Plus box	salad drawer	salad drawer	salad drawer
KEY FEATURES – FRIDGE SECTION	3.	21			
Bottle rack			_	_	_
Fully extendable glass shelves for easy reach	-		_	_	_
No. of temperature zones	1	1	1	1	1
Can holder			_		_
Number of glass safety shelves	4	4	4	4	4
Number of adjustable shelves	3	3	-	1	1
Drawers with telescopic rails			_		
Number of door bins	3	3	1		1
easyLift flexible shelf in door	3	5	I	I	
Thermometer	Analog	Digital	Digital	Digital	Digital
			Digital		
Fast cooling switch	<b>I</b>	<b>.</b>			
Included accessories KEY FEATURES – FREEZER SECTION	1 x egg trays	2 x egg trays	3 x egg trays	4 x egg trays	4 x egg trays
	2	2	3	2	2
Number of drawers (including bigBox) Shelf material			2		2
	Glass	Glass			
Frost build up	noFrost	noFrost	noFrost	noFrost	noFrost
superFreeze switch	<u> </u>		_		
Shelf adjustability			<u> </u>		
Automatic motor-driven ice-maker	-			-	_
Water filter replacement indicator	-			-	-
Thermometer			Digital	Digital	Digital
	Analog	Digital			
Water tank	-			-	-
Water tank Type of control	- touchControl	touchControl	touchControl	touchControl	- touchControl
	-	touchControl Crushed ice, ice cubes,	touchControl Crushed ice, ice cubes,		
Water tank Type of control Dispenser	touchControl	touchControl Crushed ice, ice cubes, water, water filter	touchControl Crushed ice, ice cubes, water	touchControl	
Water tank Type of control Dispenser Included accessories	- touchControl	touchControl Crushed ice, ice cubes,	touchControl Crushed ice, ice cubes,	touchControl	
Water tank Type of control Dispenser Included accessories FUNCTIONS	touchControl lce	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose	touchControl Crushed ice, ice cubes, water 1 x connection hose	touchControl lce, water –	touchControl - -
Water tank Type of control Dispenser Included accessories FUNCTIONS Electronic display	touchControl Ice  2 x ice pack	touchControl  Crushed ice, ice cubes, water, water filter  2 x ice pack 1 x connection hose	touchControl Crushed ice, ice cubes, water 1 x connection hose	touchControl Ice, water – 2 x LED	
Water tank Type of control Dispenser Included accessories FUNCTIONS Electronic display	touchControl lce	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose	touchControl Crushed ice, ice cubes, water 1 x connection hose	touchControl lce, water –	touchControl 2 x LED
Water tank Type of control Dispenser Included accessories FUNCTIONS Electronic display Warning / malfunction signal Home Connect	touchControl Ice  2 x ice pack	touchControl  Crushed ice, ice cubes, water, water filter  2 x ice pack 1 x connection hose	touchControl Crushed ice, ice cubes, water 1 x connection hose	touchControl Ice, water – 2 x LED	touchControl 2 x LED
Water tank Type of control Dispenser Included accessories FUNCTIONS Electronic display Warning / malfunction signal Home Connect	touchControl Ice  2 x ice pack  2 x LED  Visual and audible	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose  1 x LCD Visual and audible	touchControl Crushed ice, ice cubes, water  1 x connection hose  2 x LED Visual and audible	touchControl lce, water – 2 x LED Visual and audible	touchControl  -  -  2 x LED  Visual and audib
Water tank Type of control Dispenser Included accessories FUNCTIONS Electronic display Warning / malfunction signal Home Connect DIMENSIONS AND INSTALLATION	touchControl Ice  2 x ice pack  2 x LED  Visual and audible	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose  1 x LCD Visual and audible	touchControl Crushed ice, ice cubes, water  1 x connection hose  2 x LED Visual and audible	touchControl lce, water – 2 x LED Visual and audible	touchControl  -  -  2 x LED  Visual and audib
Water tank Type of control Dispenser Included accessories  FUNCTIONS Electronic display Warning / malfunction signal Home Connect DIMENSIONS AND INSTALLATION Climate class <sup>2</sup>	touchControl Ice 2 x ice pack 2 x LED Visual and audible	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose 1 x LCD Visual and audible	touchControl Crushed ice, ice cubes, water 1 x connection hose  2 x LED Visual and audible	touchControl lce, water  - 2 x LED Visual and audible -	touchControl  -  2 x LED  Visual and audib
Water tank Type of control	touchControl Ice  2 x ice pack  2 x LED  Visual and audible  -  SN-T	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose  1 x LCD Visual and audible	touchControl Crushed ice, ice cubes, water  1 x connection hose  2 x LED Visual and audible  - SN-T	touchControl lce, water  - 2 x LED Visual and audible - SN-T	touchControl  -  2 x LED  Visual and audib  -  SN-T
Water tank Type of control Dispenser Included accessories  FUNCTIONS Electronic display Warning / malfunction signal Home Connect DIMENSIONS AND INSTALLATION Climate class <sup>2</sup> Height of the product (mm)	touchControl Ice  2 x ice pack  2 x LED  Visual and audible  -  SN-T 1756	touchControl Crushed ice, ice cubes, water, water filter 2 x ice pack 1 x connection hose  1 x LCD Visual and audible  SN-T 1756	touchControl Crushed ice, ice cubes, water  1 x connection hose  2 x LED Visual and audible  - SN-T 1770	touchControl lce, water  - 2 x LED Visual and audible - SN-T 1770	touchControl  -  2 x LED  Visual and audib  -  SN-T  1770

<sup>&</sup>lt;sup>2</sup>Climate zone ST = designed to operate in ambient temperature of +18°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +18°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE	- Voltage	201500	FRIDGE FREEZERS	20/500	iQ 300
Design family	[Q 500	iQ 500	iQ500	iQ500	
Model number	KI34NP60GB	KI85NAD30G	KI87SAF30G	KI86SAF30G	KI86VVF30G
PERFORMANCE AND CONSUMPTION					
Energy efficiency class Annual energy consumption¹ (kWh)	A++ 237	A++ 232	A++ 225	A++ 218	A++ 218
Total unit net capacity (litres)	258 186	246 154	270 209	265 191	265 191
Refrigerator net capacity (litres)					
Freezer net capacity (litres)	72	92	61	74	74
Noise level (dB) DESIGN FEATURES	39	39	36	36	36
	Fixed	Fixed	Fixed	Fixed	Fixed
Type of hinge	Right reversible	Right reversible			
Reversible door	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible
Light	1	1	1	1	1
Number of compressors	2	2	2	2	1
Number of cooling circuits  Number of temperature zones in fridge	1	1			1
FOOD FRESHNESS SYSTEM	1	l l	_	-	ı
Humidity control drawer					
			_		
Antibacterial	-		-	-	-
Interior ventilation through plinth	-	-	-	-	-
Temperature adjustable KEY FEATURES – FRIDGE SECTION			_		
Bottle rack		_	-	-	_
Number of vegetable containers with	1	1	1	1	1
ribbed bottom & humidity control					
Number of shelves	5	4	5	5	5
Number of containers	-	-	-	-	-
Number of adjustable shelves  Number of door shelves	3 4	3	<u>4</u> 5	4	3
Type of shelves	-	_	_	_	_
easyLift flexible shelf in door			_	_	_
Number of door bins	1	2	-	-	-
Tilt-out door bins			_	-	
Fast cooling switch		-			
Range of temperature (°C)	4-8	4-8	_	_	4-8
KEY FEATURES – FREEZER SECTION					
Star rating	4	4	4	4	4
Thaw water drainage system	-	_	-	_	-
Frost build up	noFrost	noFrost	lowFrost	lowFrost	3
Number of drawers (including bigBox)	3	4	2	3	-
Number of compartments with flaps	-	-	-	-	-
Freezing capacity (kg/24h)	15	9	-	-	7
Storage period in event of power failure (h)	25	13	26	7	32
Fast freezing switch			-		
FUNCTIONS					
Temperature display – fridge	Twin LED display	LED display	LED display	LED display	Digital 7 segment
Warning / malfunction signal	Multi alarm system	Audible/visual	Audible/visual	Audible/visual	-
Door opened indicator	-	-	-		
ACCESSORIES					
Included accessories	2 x ice pack, 2 x egg tray, 1 x ice cube tray	2 x ice pack, 2 x egg tray, 1 x ice cube tray	2x ice pack, 2x egg tray, 1x ice cube tray	2 x ice pack, 2 x egg tray, 1 x ice cube tray	2x ice pack, 2x egg tray, 1x ice cube tray
DIMENSIONS AND INSTALLATION					
Climate class <sup>2</sup>	SN-T	SN-ST	SN-T	SN-ST	SN-ST
Height of the product (mm)	1772	1772	1772	1772	1772
Width of the product (mm)	556	558	558	556	541
Depth of the product (mm)	545	545	545	555	545
Depth with open door 90° (mm)	1140	1140	1140	-	1140
Adjustable feet	-	-	-	-	-
Maximum adjustability feet (mm)	-	_	-	-	-

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

^\textual energy consumption will depend on how the appliance is used and where it is located.  $^2$ Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone N = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +18°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE			FRIDGE FREEZERS		
Design family	iQ300 6	iQ 300	iQ 300	iQ 300	iQ 300
Model number	KI86NVF30G	KI87VVF30G	KI87VVS30G	KI85VVF30G	KI38VX22GB
PERFORMANCE AND CONSUMPTION					
Energy efficiency class	A++	A++	A++	A++	A+
Annual energy consumption <sup>1</sup> (kWh)	222	227	227	239	275
Total unit net capacity (litres)	255	272	272	259	277
Refrigerator net capacity (litres)	188	209	209	157	217
Freezer net capacity (litres)	67	63	63	102	59
Noise level (dB)	39	38	38	38	40
DESIGN FEATURES					
Type of hinge	Fixed	Fixed	Sliding	Fixed	Sliding
Reversible door	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible
Light			-		
Number of compressors	1	1	1	1	1
Number of cooling circuits	1	1	1	1	1
Number of temperature zones in fridge	1	1	1	1	-
FOOD FRESHNESS SYSTEM					
Humidity control drawer			-		-
Antibacterial	_	_	-	_	
Interior ventilation through plinth	_	-	_	_	-
Temperature adjustable		-	_	_	
KEY FEATURES – FRIDGE SECTION					
Bottle rack	_	_	-	-	-
Number of vegetable containers with	1	1	1	1	1
ribbed bottom & humidity control				·	
Number of shelves	4	5	5	4	5
Number of containers	-	-	_	-	-
Number of adjustable shelves	3	4	4	3	4
Number of door shelves	4	5	5	4	-
Type of shelves	_	Stationary	Stationary	Stationary	Fully extendable
easyLift flexible shelf in door	-	_	_	-	_
Number of door bins	4	4	4	3	5
Filt-out door bins				•	
Fast cooling switch		_	_	_	_
Range of temperature (°C)	4-8	4-8	4-8	4-8	4-8
KEY FEATURES – FREEZER SECTION					
Star rating	4	4	4	4	4
Thaw water drainage system	-	-	_	-	_
Frost build up	noFrost	2	2	4	Manual
Number of drawers (including bigBox)	3	_	_	_	3
Number of compartments with flaps	_	_	_	_	1
Freezing capacity (kg/24h)	8	3	3	4	6
Storage period in event of power failure (h)	13	26	26	24	13
Fast freezing switch	<u> </u>	20	20		
FUNCTIONS		_			
Temperature display – fridge	LED display	LED display	LED display	LED display	LED display
Warning / malfunction signal	-	-	-	-	-
Door opened indicator	_	_	_	_	_
ACCESSORIES					
Included accessories	2x ice pack,	2 x ice pack,	2x ice pack,	2 x ice pack,	_
	2x egg tray,	2 x egg tray,	2 x egg tray,	2 x egg tray,	
	1 x ice cube tray				
DIMENSIONS AND INSTALLATION					
Climate class <sup>2</sup>	SN-ST	SN-T	SN-T	SN-T	SN-ST
Height of the product (mm)	1772	1772	1772	1772	1772
Width of the product (mm)	541	538	538	538	541
	545	542	542	542	545
Depth of the product (mm)			3.2	J 12	5.5
	1140	1140	1140	1140	1140
Depth with open door 90° (mm)			1140		1140
Depth of the product (mm)  Depth with open door 90° (mm)  Adjustable feet  Maximum adjustability feet (mm)	1140	1140 - -	1140 - -	1140 _ _	
Depth with open door 90° (mm)	1140	-	-	-	-

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

Actual energy consumption will depend on how the appliance is used and where it is located. 
^Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. 
Climate zone S = designed to operate in ambient temperature of +16°C to 32°C. 
Climate zone ST = designed to operate in ambient temperature of +18°C to 38°C. 
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE			FRIDGE	S 177CM			FREEZER 177CM
Design family	iQ 700	iQ 500	iQ 500	iQ 500	iQ 300	iQ 300	iQ 700
Model number	KI42FP60GB	KI81RAD30	KI81RAF30G	KI82LAF30	KI81RVS30G	KI82LVS30G	GI38NA55GB
PERFORMANCE AND CONSUMPTION							
Energy efficiency class	A++	A++	A++	A++	A++	A++	A+
Annual energy consumption <sup>1</sup> (kWh)	133	116	116	209	116	209	308
Total unit net capacity (litres)	302	319	319	286	319	286	210
Refrigerator net capacity (litres)	302	319	319	252	319	252	-
Freezer net capacity (litres)	_	_	_	34	_	34	210
Noise level (dB)	39	37	37	36	37	39	42
DESIGN FEATURES		-					
Type of hinge	Fixed softClose	Fixed softClose	Fixed	Fixed	Sliding	Sliding	Fixed softClose
Reversible door	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible
Light	•	•	•	•	•	•	
Number of compressors	1	1	1	1	1	1	1
Number of cooling circuits	2	1	1	1	_	1	1
Number of temperature zones in fridge	2	-	-	-	_		_
FOOD FRESHNESS SYSTEM							
Humidity control drawer					_	-	_
Antibacterial		-	-	-	_	_	_
Interior ventilation through plinth	-			_			_
Temperature adjustable		-	-	-		-	
KEY FEATURES – FRIDGE SECTION		_	_				_
Bottle rack	_			-	_	-	_
Number of vegetable containers with	3	-					_
ribbed bottom & humidity control	3	_	_	_	-	_	_
Number of shelves	7	7	7	5	7	5	_
Number of containers	/	2	2	2	2	2	
Number of containers  Number of adjustable shelves	3	6	6	4	6	4	
Number of adjustable shelves  Number of door shelves	4	6	6	6	6	5	_
Type of shelves	-		Fully extendable	Fully extendable	Glass	Glass	
	-	Fully extendable	Fully extendable	Fully extendable	Glass	Glass	_
easyLift flexible shelf in door Number of door bins	4	3	3	3	4	3	_
	4		3	3	-	3	
Tilt-out door bins			-		-	-	_
Fast cooling switch							
Range of temperature (°C)	-	-	-	-	-	-	-
KEY FEATURES – FREEZER SECTION		_		-			_
Star rating						4	
Thaw water drainage system	-	-	-	-	-	-	-
Frost build up	-		noFrost	noFrost	-		noFrost
Number of drawers (including bigBox)	-	-	-	1	-	-	5
Number of compartments with flaps	-	-	1	-	-	1	2
Freezing capacity (kg/24h)	-	-	3	3	-	3	25
Storage period in event of power failure (h)	-	-	22	22	-	22	11
Fast freezing switch	-	-	-	-	-	-	-
FUNCTIONS							
Temperature display – fridge	LED display	LED display	LED display	LED display	LED display	LED display	-
Warning / malfunction signal	-	-	-	-	-	-	
Door opened indicator					-	-	-
ACCESSORIES							
Included accessories	2x egg tray	2x egg tray	2x egg tray	2x egg tray, 1x ice cube tray	2 x egg tray	2 x egg tray, 1 x ice cube tray	-
DIMENSIONS AND INSTALLATION							
Climate class <sup>2</sup>	SN-T	SN-T	SN-T	SN-ST	SN-T	SN-T	SN-T
Height of the product (mm)	1772	1772	1772	1772	1772	1772	1772
Width of the product (mm)	556	558	558	558	541	541	556
Depth of the product (mm)	545	545	545	545	545	545	545
Depth with open door 90° (mm)	1140	1140	1140	1140	1140	1140	1140
Adjustable feet	-	-	-	-	-	-	-
Maximum adjustability feet (mm)	-	-	-	_	-	_	-

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

^\text{1Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$ Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone N = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +18°C to 38°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE	FREEZER 177CM	FRIDGE 140CM	FREEZER 140CM
Design family	iQ500	iQ 500	iQ700
Model number	GI81NAE30G	KI51RAF30G	GI25NP60
PERFORMANCE AND CONSUMPTION			
Energy efficiency class	A+	A++	A++
Annual energy consumption1 (kWh)	243	109	207
Total unit net capacity (litres)	211	247	156
Refrigerator net capacity (litres)	-	247	-
Freezer net capacity (litres)  Noise level (dB)	211 36	33	156 41
DESIGN FEATURES	36	33	41
Type of control setting and signalling devices	Super setting, warning function, warning signal door open	Super setting, temperature display, warning signal door open	Super setting, warning signal door open
Type of control	Electronic	Electronic	Electronic
Reversible door hinge		•	
Type of hinge	Fixed	Flush-folding	Fixed softClose
FOOD FRESHNESS SYSTEM			
Number of compressors	1	1	1
KEY FEATURES – FRIDGE SECTION Light	-		
Number of shelves		6	
Number of adjustable shelves		5	-
Material of the shelves		Glass	_
Number of door bins	-	3	_
Humidity control drawer	-		-
Number of door shelves	-	5	-
Number of containers	-	1	-
Interior ventilator	-	-	-
Shelves for bottles	-	_	-
KEY FEATURES – FREEZER SECTION			
Star rating	4	-	4
Temperature rise time (h)	22	-	20
Freezing capacity (kg/24h) – NEW (2010/30/EC)	20	-	18
Storage period in event of power failure (h)	22	-	20
Number of freezing flaps (Stck) FUNCTIONS	2	-	1
Electronic control	LED display	1 x 7 segment	
Warning signal door open	Acoustic	Acoustic	Visual / audible
Temperature display fridge	-	Digital 7 segment	-
Fast freezing switch			
Door open indicator		•	•
Temperature adjustable	-		-
Temperature adjustable freezer		-	•
ACCESSORIES			3 11
Included accessories	2 x cold accumulator, 1 x ice cube tray	2 x egg tray	2 x cold accumulator, 1 x ice cube tray
DIMENSIONS AND INSTALLATION	1 x ice case day		
Climate class <sup>2</sup>	SN-T	SN-T	SN-T
Required niche size for installation: H x W x D (mm)	1775.0 x 560 x 550	1400 x 560 x 550	1600 x 630 x 660
Height of the product (mm)	1772	1397	1397
Width of the product (mm)	558	558	556
Depth of the product	545	545	545
Depth with open door 90° (mm)	1140	1140	1140
Minimum height for installation (mm)	1775	1400	1400
Maximum height for installation (mm)  Minimum width for installation (mm)	1775	1400	1400
Minimum width for installation (mm)  Maximum width for installation (mm)	560 560	560 560	560 560
Depth for installation (mm)	550	550	550
Height of the packed product (mm)	1840	1470	1595
Width of the packed product (mm)	620	620	630
Depth of the packed product (mm)	640	640	660
Minimum ambient temperature (°C)	10	10	10
Maximum ambient temperature (°C)	43	43	43
Adjustable feet	-	-	-
Length electrical supply cord (cm)	-	-	230
Connection rating (W)	120	90	120
Current (A)	13	13	10
Voltage (V)	220-240	220-240	220-240
Frequency (Hz)	50 VDE	50 VDE	50-60
Approval certificates	66	55	VDE 62
Net weight (kg)  Gross weight (kg)	72	55	66
EAN code	4242003731383	4242003742983	4242003462102
L/ III COUC	7272003731303	7272003/42703	7272003402102

■ Yes, model has this feature. — Feature not available for this model.

<sup>2</sup>Climate zone ST = designed to operate in ambient temperature of +18°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +18°C to 38°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE		FRIDGES 122CM	
Design family	iQ 500	iQ 500	iQ 300
Model number	KI41RAD30	KI41RAF30G	KI41RVS30G
PERFORMANCE AND CONSUMPTION			
Energy efficiency class	A++	A++	A++
Annual energy consumption <sup>1</sup> (kWh)	105	105	105
Total unit net capacity (litres)	211	211	211
Refrigerator net capacity (litres)	211	211	211
Freezer net capacity (litres)	-	-	-
Noise level (dB)	33	33	37
DESIGN FEATURES			
Type of hinge	Fixed softClose	Flat	Sliding
Reversible door	Right reversible	Right reversible	Right reversible
Light	•		
Number of compressors	1	1	1
Number of cooling circuits	1	1	1
Number of temperature zones in fridge	_	-	-
FOOD FRESHNESS SYSTEM			
Humidity control drawer			-
Antibacterial	_	-	-
Interior ventilation through plinth	_	_	_
Temperature adjustable	_		_
KEY FEATURES – FRIDGE SECTION			
Bottle rack	_	_	_
Number of vegetable containers with	1	1	1
ribbed bottom & humidity control		· ·	
Number of shelves	6	6	6
Number of containers	1	1	1
Number of adjustable shelves	5	5	5
Number of door shelves	4	4	3
Type of shelves	<u> </u>		
easyLift flexible shelf in door		_	
Number of door bins	3	3	1
Tilt-out door bins	•		•
Fast cooling switch	-	-	
Range of temperature (°C)		_	
KEY FEATURES – FREEZER SECTION			
Star rating	_	-	
Thaw water drainage system		_	
Frost build up		_	
Number of drawers (including bigBox)	_	_	
Number of drawers (including bigbox)  Number of compartments with flaps		_	
Freezing capacity (kg/24h)		_	4
Storage period in event of power failure (h)		_	
Fast freezing switch		_	<del></del>
FUNCTIONS		_	
Temperature display – fridge	LED display	LED display	LED display
	LED display	LED display	LED display
Warning / malfunction signal  Door opened indicator	•	-	
ACCESSORIES			
		2 1 1 1 1	2
Included accessories	2 x egg tray	2 x egg tray, 1 x ice cube tray	2 x egg tray
DIMENSIONS AND INSTALLATION	CNT	SNIT	CNIT
Climate class <sup>2</sup>	SN-T	SN-T	SN-T
Height of the product (mm)	1221	1221	1221
Width of the product (mm)	558	558	541
Depth of the product (mm)	545	545	545
Depth with open door 90° (mm)	1140	1140	1140
Adjustable feet	-	-	<del>-</del>
Maximum adjustability feet (mm)	-	-	-
Required niche size for installation: H x W x D (mm)	1225 x 560 x 550	1225 x 560 x 550	1225 x 560 x 550

<sup>2</sup>Climate zone ST = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone ST = designed to operate in ambient temperature of +16°C to 32°C.

Climate zone ST = designed to operate in ambient temperature of +18°C to 38°C.

Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE	FREEZER 122CM	FREEZER 102CM
Design family	iQ 500	iQ300
Model number	GI41NAE30G	GI31NAE30G
PERFORMANCE AND CONSUMPTION		
Energy efficiency class	A++	A++
Annual energy consumption <sup>1</sup> (kWh)	188	168
Total unit net capacity (litres)	127	97
Refrigerator net capacity (litres)	-	_
Freezer net capacity (litres)	127	97
Noise level (dB)	36	37
DESIGN FEATURES		
Type of hinge	Flat	Flat
Reversible door	Left reversible	Left reversible
Light	-	_
Number of compressors	1	1
Number of cooling circuits	1	1
Number of temperature zones in fridge	-	-
FOOD FRESHNESS SYSTEM		
Humidity control drawer	-	-
Antibacterial	<u>-</u>	_
Interior ventilation through plinth	-	_
Temperature adjustable	•	_
KEY FEATURES – FRIDGE SECTION		
Bottle rack	_	-
Number of vegetable containers with		
ribbed bottom & humidity control	-	-
Number of shelves		_
Number of containers		_
Number of adjustable shelves		
Number of door shelves		
Type of shelves	<u>-</u>	
easyLift flexible shelf in door	<u> </u>	-
Number of door bins	<u> </u>	-
Tilt-out door bins	-	-
Fast cooling switch	<u>-</u>	-
Range of temperature (°C)	-	-
KEY FEATURES – FREEZER SECTION		
Star rating Star rating	4	4
Thaw water drainage system	-	-
Frost build up	noFrost	noFrost
Number of drawers (including bigBox)	4	3
Number of compartments with flaps	1	1
Freezing capacity (kg/24h)	20	20
Storage period in event of power failure (h)	23	25
Fast freezing switch		
FUNCTIONS		
Temperature display – fridge	-	_
Warning / malfunction signal	•	
Door opened indicator	•	
ACCESSORIES		
Included accessories	2 x cold accumulator, 1 x ice cube tray	2 x cold accumulator, 1 x ice cube tray
DIMENSIONS AND INSTALLATION		
Climate class <sup>2</sup>	SN-T	SN-T
Height of the product (mm)	1221	1021
Width of the product (mm)	558	558
Depth of the product (mm)	545	545
Depth with open door 90° (mm)	1140	1140
Adjustable feet	1140	-
Maximum adjustability feet (mm)		

Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>2</sup>Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone N = designed to operate in ambient temperature of +16°C to 32°C.

Climate zone ST = designed to operate in ambient temperature of +18°C to 32°C.

Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE		FRIDGES 87CM		FREEZER 87CM	BUILT-UNDER FREEZER 72CM
Design family	iQ 500	iQ300	iQ 300	iQ 500	iQ 500
Model number	KI21RAF30G	KI21RVF30G	KI22LVS30G	GI21VAF30G	GI11VAF30
PERFORMANCE AND CONSUMPTION					
Energy efficiency class	A++	A++	A++	A++	A+++
Annual energy consumption <sup>1</sup> (kWh)	97	97	148	157	144
Total unit net capacity (litres)	144	144	124	97	72
Refrigerator net capacity (litres)	144	144	109	-	-
Freezer net capacity (litres)	-	-	15	97	72
Noise level (dB)	33	36	38	36	36
DESIGN FEATURES					
Type of hinge	Fixed	Fixed	Follow-door	Flat	Flat
Reversible door	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible
Light	•			-	-
Number of compressors	1	1	1	1	1
Number of cooling circuits	1	1	1	1	1
Number of temperature zones in fridge	-	_	-	_	-
FOOD FRESHNESS SYSTEM					
Humidity control drawer	•			_	-
Antibacterial	-	-	-	-	-
Interior ventilation through plinth	-	_	-	_	-
Temperature adjustable			-		•
KEY FEATURES – FRIDGE SECTION				J	
Bottle rack	_	-	-	-	-
Number of vegetable containers with	1	-	-	-	-
ribbed bottom & humidity control					
Number of shelves	4	4	3	-	-
Number of containers	1	1	1	-	-
Number of adjustable shelves	3	3	2	-	-
Number of door shelves	3	3	4	_	-
Type of shelves	_	-	-	-	-
easyLift flexible shelf in door	_	-	-	-	-
Number of door bins	2	3	2	_	-
Tilt-out door bins				-	-
Fast cooling switch				-	-
Range of temperature (°C)	-	_	-	_	-
KEY FEATURES – FREEZER SECTION					
Star rating	_	-	4	4	4
Thaw water drainage system	_	_	-	_	-
Frost build up	-	_	-	lowFrost	lowFrost
Number of drawers (including bigBox)	_	_	-	3	3
Number of compartments with flaps	_	_	1	_	-
Freezing capacity (kg/24h)	-	-	2	8	8
Storage period in event of power failure (h)	-	-	13	22	21
Fast freezing switch	-	-	-		
FUNCTIONS					
Temperature display – fridge	LED display	LED display	LED display	-	-
Warning / malfunction signal	-	-	-		
Door opened indicator				-	-
ACCESSORIES					
Included accessories	2 x egg tray	2x egg tray	2 x egg tray	2 x cold accumulator,	2 x cold accumulator,
			1 x ice cube tray	1 x ice cube tray	1 x ice cube tray
DIMENSIONS AND INSTALLATION					
Climate class <sup>2</sup>	SN-T	SN-T	SN-ST	SN-T	SN-T
Height of the product (mm)	874	874	874	874	712
Width of the product (mm)	558	541	541	558	558
Depth of the product (mm)	545	545	545	545	545
Depth with open door 90° (mm)	1140	1140	1140	1140	1140
Adjustable feet	_	-	-	-	-
Maximum adjustability feet (mm)	_	_	-	_	-
Required niche size for installation: H x W x D (mm)	880 x 560 x 550	880 x 560 x 550	880 x 560 x 550	880 x 560 x 550	720 x 560 x 550

<sup>2</sup>Climate zone ST = designed to operate in ambient temperature of +10°C to 32°C. Climate zone SN = designed to operate in ambient temperature of +16°C to 32°C. Climate zone N = designed to operate in ambient temperature of +16°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +18°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +18°C to 43°C.

# Built-in cooling specifications

APPLIANCE TYPE	BUILT-UNDER	BUILT-UNDER FREEZER 82CM	
Design family	iQ 300	iQ 300	iQ 300
Model number	KU15LA60GB	KU15RA51GB	GU15DA50GB
PERFORMANCE AND CONSUMPTION			
Energy efficiency class	A++	A+	A+
Annual energy consumption <sup>1</sup> (kWh)	140	118	184
Total unit net capacity (litres)	123	137	_
Refrigerator net capacity (litres)	108	137	_
Freezer net capacity (litres)	15	-	98
Noise level (dB)	38	38	38
DESIGN FEATURES			
Type of hinge	Flat	Flat	Flat
Reversible door	Right reversible	Right reversible	Right reversible
Light			
Number of compressors	1	1	1
Number of cooling circuits	1	1	1
Number of temperature zones in fridge	_	_	_
FOOD FRESHNESS SYSTEM			
Humidity control drawer			_
Antibacterial	_	-	_
Interior ventilation through plinth	_		-
Temperature adjustable			
KEY FEATURES – FRIDGE SECTION			
Bottle rack	_	_	-
Number of vegetable containers with		_	
ribbed bottom & humidity control	_	_	_
Number of shelves	2	3	_
Number of containers	2	2	_
Number of adjustable shelves	1	3	_
Number of door shelves	3	3	-
Type of shelves	_	_	_
easyLift flexible shelf in door	_	_	_
Number of door bins	_	_	_
Tilt-out door bins	_	_	_
Fast cooling switch	_	_	_
Range of temperature (°C)	_	_	_
KEY FEATURES – FREEZER SECTION			
Star rating	4	-	_
Thaw water drainage system	_	_	•
Frost build up	_	_	Manual
Number of drawers (including bigBox)	1	_	-
Number of compartments with flaps	_	_	_
Freezing capacity (kg/24h)	2	_	12
Storage period in event of power failure (h)	12	_	23
Fast freezing switch	-	_	25
FUNCTIONS			_
Temperature display – fridge	_	-	_
Warning / malfunction signal	_	_	_
Door opened indicator	_		
ACCESSORIES			
Included accessories	1 x egg tray,	1 x egg tray	2 x ice pack,
included accessories	1 x legg tray,	i x egg tray	1 x ice cube tray
DIMENSIONS AND INSTALLATION		·	cc case day
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
Height of the product (mm)	820	820	820
Width of the product (mm)	598	588	598
Depth of the product (mm)	548	548	548
Depth of the product (mm) Depth with open door 90° (mm)	1150	1150	1150
Adjustable feet Maximum adjustability feet (mm)	50	50	50
viaxiiiiuiii auius(abiiitv teet (mm)	50	50	50

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

<sup>\*\*</sup>Textual energy consumption will depend on how the appliance is used and where it is located.

\*\*Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.


Climate zone N = designed to operate in ambient temperature of +16°C to 32°C.


Climate zone ST = designed to operate in ambient temperature of +18°C to 38°C.


Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Cooling technical diagrams


# aCool fridge freezer CI36BP01

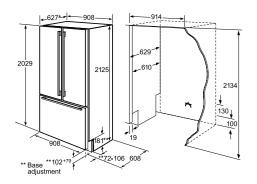








# aCool fridge CI30RP01







# aCool fridge CI24RP01







# aCool freezer FI18NP31

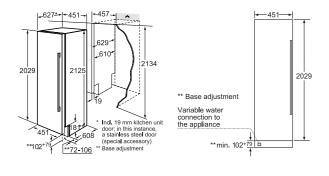

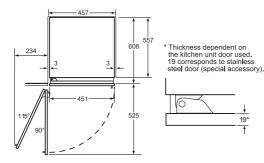



# aCool freezer FI24NP31






# aCool freezers FI24DP32 and FI24DP02











# aCool wine cooler CI24WP02








Cooling | Technical diagrams | Cooling

# Cooling technical diagrams


# American fridge freezer KA92NLB35G




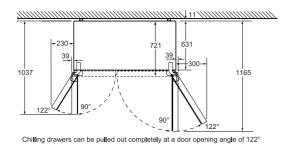





# American fridge freezer KA92DAI20G




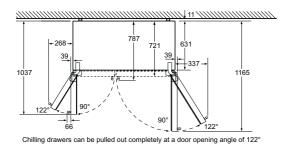




# American fridge freezers KA90DVI20G, KA90IVI20G and KA90NVI20G




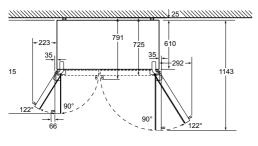





\*\* Please note: KA90IVI20G requires no water connection


# noFrost fridge freezer KI34NP60GB









# noFrost fridge freezer KI85NAD30G










The specified unit door dimensions are valid for a door gap of 4 mm.

# lowFrost fridge freezer KI87SAF30G










The specified unit door dimensions are valid for a door gap of 4 mm.

# lowFrost fridge freezer KI86SAF30G










The specified unit door dimensions are valid for a door gap of 4 mm.

# noFrost fridge freezers KI86VVF30G and KI86NVF30G









The specified unit door dimensions are valid for a door gap of 4 mm.

# Cooling technical diagrams


## lowFrost freezer KI87VVF30G







The specified unit door dimensions are valid for a door gap of 4 mm.

## lowFrost freezer KI87VVS30G










The specified unit door dimensions are valid for a door gap of 4 mm.

## lowFrost freezer KI85VVF30G











The specified unit door dimensions are valid for a door gap of 4 mm.

# Static freezer KI38VX22GB












The specified unit door dimensions are valid for a door gap of 4 mm.

# 177cm fridge and freezers KI42FP60GB, GI38NA55GB and GI81NAE30G










The specified unit door dimensions are valid for a door gap of 4 mm.


## 177cm fridges KI81RAD30, KI81RAF30G and KI82LAF30










# 177cm fridges KI81RVS30G and KI82LVS30G






# 140cm fridges and freezer KI51RAF30G and GI25NP60










# Cooling technical diagrams


122cm fridges and freezer KI41RAD30, KI41RAF30G and GI41NAE30G










# 122cm fridges KI41RVS30G







# 102cm freezer GI31NAE30G










# 88cm fridges KI21RVF30G and KI22LVS30G










# 88cm fridge and freezer KI21RAF30G and GI21VAF30G










## 72cm built-in freezer GI11VAF30







# 82cm built-under fridges and freezer KU15LA60GB, KU15RA51GB and GU15DA50GB



Space for electrical connection next to the appliance on the left or right-hand side. Ventilation in the base.

Dishwashers | Specifications Specifications | Dishwashers

# Dishwasher specifications

APPLIANCE TYPE Design family	iQ 700	iQ 700	iQ 500	INTEGRATED IQ 500	iQ 500	iQ 300
Model number	SN678D06TG	SN678D01TG	SN658D00MG	SN658D01MG	SN658D02MG	SX736X03ME
Description	Fully integrated	Fully integrated with	Fully integrated with	Fully integrated with	Fully integrated with	Fully integrated
	with Home Connect	Door openAssist for	Door openAssist for	Door openAssist for	Door openAssist for	86.5cm extra-heig
	Wi-Fi connectivity and Door openAssist for	handleless kitchens and Zeolith® energy	handleless kitchens and Zeolith® energy	handleless kitchens and 6.5L water	handleless kitchens and 39dB noise level	with varioHinge
	handleless kitchens	efficient drying	efficient drying	consumption	and 33db noise level	
C.L. (N		, ,	, ,		DI I	51.1
Colour / Material panel	Black	Black	Black	Black	Black	Stainless steel
Taller height	-	_	-	-	-	Extra Height 86.5c with varioHinge
DEDECORMANICE						with varioninge
PERFORMANCE Reference programme for measurements	F	F	F	F	F	F
	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50
Energy efficiency class	A+++	A+++	A+++	A++	A+	A++
Energy consumption annual (kWh) <sup>1</sup>	234	237	237	262	299	266
Water consumption annual (litres) <sup>1</sup>	2660	2660	2660	1820	2660	2660
Energy consumption (kWh) <sup>2</sup>	0.82	0.83	0.83	0.92	1.05	0.93
Water consumption (litres) <sup>2</sup>	9.5	9.5	9.5	6.5	9.5	9.5
Cleaning performance	A	A	A	A	A	A
Drying performance	A	A	A	A	A	A
Number of place settings	14	14	14	13	14	14
Noise level (dB [A] re 1pW)	41	42	44	44	39	44
Total cycle time of reference programme (min)	195	195	195	195	195	210
PROGRAMMES / FUNCTIONS						
Number of programmes	8	8	8	8	8	6
Number of different wash temperatures	6	6	6	5	5	5
Automatic Programme	•	•	•	<u> </u>		
List of programmes						
	Intensive 70°C, Auto 45-65°C,	Intensive 70°C, Auto 45-65°C,	Intensive 70°C, Auto 45-65°C,	Intensive 70°C, Auto 45-65°C,	Intensive 70°C, Auto 45-65°C,	Intensive 70°C, Auto 45-65°C,
	Economy 50°C,	Economy 50°C,	Economy 50°C,	Economy 50°C,	Economy 50°C,	Economy 50°C,
	Silence 50°C,	Silence 50°C,	Silence 50°C,	Silence 50°C,	Silence 50°C,	Glass 40°C,
	Short 60°C,	Short 60°C,	Short 60°C,	Glass 40°C,	Glass 40°C,	1 hour,
	Glass 40°C,	Glass 40°C,	Glass 40°C,	1 hour,	1 hour,	Pre-Rinse
	Quick Wash 45°C, Pre-Rinse	Quick Wash 45°C, Pre-Rinse	Quick Wash 45°C, Pre-Rinse	Quick Wash 45°C, Pre-Rinse	Quick Wash 45°C, Pre-Rinse	
Number of options	6	5	5	5	5	4
Additional operational options	Shine&Dry, Hygiene	Shine&Dry, Hygiene	Shine&Dry, Hygiene	extraDry, Hygiene	extraDry, Hygiene	extraDry,
	Plus, intensiveZone,	Plus, intensiveZone, varioSpeed Plus	Plus, intensiveZone,	Plus, intensiveZone,	Plus, intensiveZone,	intensiveZone,
	Wi-Fi, varioSpeed Plus	variospeed rius	varioSpeed Plus	varioSpeed Plus	varioSpeed Plus	varioSpeed Plus
Home Connect	•	-	-	-	-	-
Machine care	-					
FLEXIBLE DESIGN ELEMENTS						
Basket type	varioFlex Pro	varioFlex Pro	varioFlex with coloured	varioFlex with coloured	varioFlex with coloured	varioFlex
			touch points	touch points	touch points	
varioDrawer	varioDrawer Pro	varioDrawer Pro	varioDrawer	varioDrawer	varioDrawer	varioDrawer
Adjustable upper basket	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stag
Largest loadable dish upper basket (cm)	21	21	27	27	27	23
•						
Largest loadable dish lower basket (cm)	31	31	30	31	31	33
Number of flip tines in upper / lower rack	6/8	6/8	2/4	2/4	2/4	2/4
Basket with handle	Bottom basket,	Bottom basket,	Bottom basket,	Bottom basket,	Bottom basket,	Bottom basket,
	top basket	top basket	top basket	top basket	top basket	top basket
INNOVATION AND TECHNOLOGY						
Real-time clock		•	-	-	-	-
Door openAssist	•	•	•		•	-
Indicator projection on floor	timeLight	timeLight	timeLight	timeLight	timeLight	infoLight (blue)
Zeolith®	-			-	-	-
Drying system	Zeolith®	Zeolith®	Zeolith®	hydroDry	hydroDry	hydroDry
Flood protection system	hydroSafe 24 hour	hydroSafe 24 hour	hydroSafe 24 hour	hydroSafe 24 hour	hydroSafe 24 hour	hydroSafe 24 hou
Load sensor	-					
hydroSensor technology		•				•
DESIGN FEATURES						<u> </u>
Interior light	Blue	Blue	Blue	Blue	Blue	_
Full colour TFT display	blue	blue	-	-	-	_
Start delay time max (h)	24	24	24	24	24	24
Child safety	24	24	24	24	24	
Digital countdown indicator	-	-	-	-	-	-
Digital Countaown Hulcatol			_			
End of cycle indicator			A counti-	Annuati-	A corret: -	
End of cycle indicator	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic
Salt light indicator / Rinse aid light indicator	Acoustic	Acoustic ■ / ■	■/■	■/■	■/■	■/■
Salt light indicator / Rinse aid light indicator Interior cavity	Acoustic  ■ / ■  Stainless steel	Acoustic  ■ / ■  Stainless steel	■ / ■ Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system	Acoustic	Acoustic ■ / ■	■/■	■/■	■/■	■/■
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS	Acoustic	Acoustic          Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm)	Acoustic  /   Stainless steel  175	Acoustic  I / I  Stainless steel  175	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)	Acoustic              Stainless steel    175  165	Acoustic  I   Stainless steel  175 165	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm)	Acoustic  /   Stainless steel  175	Acoustic  I / I  Stainless steel  175	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm)	Acoustic              Stainless steel    175  165	Acoustic  I   Stainless steel  175 165	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg)	Acoustic                  Stainless steel    175  165  190	Acoustic	175 165 190	175 165 190	175 165 190	Stainless steel  175 165 190
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)  Length of outlet hose (cm)  Net weight (kg)  Gross weight (kg)	Acoustic            Stainless steel    175  165  190  45.0	Acoustic	Stainless steel  175 165 190 45.0	Stainless steel  175 165 190 41.0	175 165 190 41.0	Stainless steel  175 165 190 40.0
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH)	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0	Stainless steel  175 165 190 41.0 43.0	175 165 190 41.0	175 165 190 40.0 42.0
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50	Stainless steel  175 165 190 41.0 43.0 50	175 165 190 41.0 43.0 50	Stainless steel  175 165 190 40.0 42.0 50
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION	Acoustic	Acoustic	175 165 190 45.0 48.0 50	Stainless steel  175 165 190 41.0 43.0 50 60	175 165 190 41.0 43.0 50	Stainless steel  175 165 190 40.0 42.0 50 60
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION Maximum height for installation (mm)	Acoustic	Acoustic	175 165 190 45.0 48.0 50 60	Stainless steel  175 165 190 41.0 43.0 50 60	175 165 190 41.0 43.0 50 60	175 165 190 40.0 42.0 50 60
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION Maximum height for installation (mm) Width of the product (mm)	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60  875 598	Stainless steel  175 165 190 41.0 43.0 50 60  875 598	Stainless steel  175 165 190 41.0 43.0 50 60  875 598	Stainless steel  175 165 190 40.0 42.0 50 60  925 598
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION Maximum height for installation (mm) Maximum width for installation (mm)	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60 875 598 600	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION Maximum height for installation (mm) Width of the product (mm) Maximum width for installation (mm) Depth for installation (mm)	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60 875 598 600 550	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600 550	175 165 190 41.0 43.0 50 60 875 598 600 550	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION  Maximum height for installation (mm) Width of the product (mm) Maximum width for installation (mm) Depth for installation (mm)  Maximum adjustability feet (mm)	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60 875 598 600	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)  Length of outlet hose (cm)  Net weight (kg)  Gross weight (kg)  Maximum accepted water hardness (°DH)  Maximum temperature for water intake (°C)³  INSTALLATION  Maximum height for installation (mm)  Width of the product (mm)  Maximum width for installation (mm)  Depth for installation (mm)  Maximum adjustability feet (mm)  ACCESSORIES	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60  875 598 600 550 60	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60	175 165 190 41.0 43.0 50 60 875 598 600 550 60	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550 60
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)  Length of outlet hose (cm)  Net weight (kg)  Gross weight (kg)  Maximum accepted water hardness (°DH)  Maximum temperature for water intake (°C)³  INSTALLATION  Maximum height for installation (mm)  Width of the product (mm)  Maximum width for installation (mm)  Depth for installation (mm)  Maximum adjustability feet (mm)  ACCESSORIES	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60  875 598 600 550 60  Large item spray head,	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60  Large item spray head,	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60  Large item spray head,	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550 60  Large item spray he
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of inlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION Maximum height for installation (mm) Width of the product (mm) Maximum width for installation (mm) Depth for installation (mm) Maximum adjustability feet (mm)	Acoustic                  Stainless steel    175   165   190   45.0   48.0   50   60    875   598   600   550   60    Large item spray head, glass tray, steam	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)  Length of outlet hose (cm)  Net weight (kg)  Gross weight (kg)  Maximum accepted water hardness (°DH)  Maximum temperature for water intake (°C)³  INSTALLATION  Maximum height for installation (mm)  Width of the product (mm)  Maximum width for installation (mm)  Depth for installation (mm)  Maximum adjustability feet (mm)  ACCESSORIES	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60  875 598 600 550 60  Large item spray head,	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60  Large item spray head,	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60  Large item spray head,	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550 60  Large item spray he
Salt light indicator / Rinse aid light indicator Interior cavity  Self-cleaning filter system  TECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)  Length of outlet hose (cm)  Net weight (kg)  Gross weight (kg)  Maximum accepted water hardness (°DH)  Maximum temperature for water intake (°C)³  INSTALLATION  Maximum height for installation (mm)  Width of the product (mm)  Maximum width for installation (mm)  Depth for installation (mm)  Maximum adjustability feet (mm)  ACCESSORIES	Acoustic                  Stainless steel    175   165   190   45.0   48.0   50   60    875   598   600   550   60    Large item spray head, glass tray, steam	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam	Stainless steel  175 165 190 41.0 43.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550 60  Large item spray he steam deflection pl.
Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system TECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of inlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ INSTALLATION Maximum height for installation (mm) Width of the product (mm) Maximum width for installation (mm) Depth for installation (mm) Maximum adjustability feet (mm) ACCESSORIES Included accessories	Acoustic	Acoustic	Stainless steel  175 165 190 45.0 48.0 50 60 875 598 600 550 60  Large item spray head, glass tray, steam deflection plate	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60  Large item spray head, glass tray, steam deflection plate	Stainless steel  175 165 190 41.0 43.0 50 60  875 598 600 550 60  Large item spray head, glass tray, steam deflection plate	Stainless steel  175 165 190 40.0 42.0 50 60  925 598 600 550 60  Large item spray he steam deflection pl

# Dishwasher specifications

	iQ 300	Y INTEGRATED iQ 300	60CM SEMI-INTEGRATED	45CM FULLY	iQ300
Design family Model number	SN736X03ME	SN636X00KG	SN578S36TE	SR656X01TE	SR636D00MG
Description	Fully integrated 81.5cm			45cm fully integrated with	45cm fully integrate
Description .	height with varioHinge	Fully integrated with infoLight and varioDrawer	Semi-integrated with Home Connect Wi-Fi connectivity	Zeolith® drying system,	with Door openAssis
	neight that tunoringe	iniozigni ana vanoziave.	and Zeolith® energy	43dB noise level, A+++	46dB noise level an
			efficient drying	energy efficiency rating and	VarioFlex baskets
				varioFlex Pro baskets	
Colour / Material panel	Stainless steel	Black	Stainless steel	Stainless steel	Black
aller height	-	-	_	-	-
PERFORMANCE					
Reference programme for measurements	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50
Energy efficiency class	A++	A++	A+++	A+++	A++
Energy consumption annual (kWh) <sup>1</sup>	266	262	211	188	211
Water consumption annual (litres) <sup>1</sup>	2660	2660	2100	2660	2660
Energy consumption (kWh) <sup>2</sup>	0.93	0.92	0.73	0.66	0.74
Water consumption (litres) <sup>2</sup>	9.5	9.5	7.5	9.5	9.5
Cleaning performance	A	A	A	A	A
Drying performance	A	A	A	A	A
Number of place settings	14	13	13	10	10
Noise level (dB [A] re 1pW)	44	46	42	43	46
Total cycle time of reference programme (min)	210	210	225	195	195
PROGRAMMES / FUNCTIONS	213	2.10	223	.,,,	175
Number of programmes	6	6	8	6	6
Number of different wash temperatures	5	5		6	4
·	5		6		
Automatic Programme List of programmes	_				
ast or programmes	Intensive 70°C,	Intensive 70°C,	Intensive 70°C,	Intensive 70°C,	Intensive 70°C,
	Auto 45-65°C, Economy 50°C,	Auto 45-65°C, Economy 50°C,	Auto 45-65°C, Economy 50°C,	Auto 45-65°C, Economy 50°C,	Auto 45-65°C, Economy 50°C,
	Glass 40°C,	Glass 40°C,	Silence 50°C,	Silence 50°C,	Silence 50°C,
	1 hour,	1 hour,	Short 60°C,	Short 60°C,	1 hour,
	Pre-Rinse	Pre-Rinse	Glass 40°C,	Glass 40°C	Quick Wash 45°C
			Quick Wash 45°C,		
			Pre-Rinse		
Number of options	4	3	6	4	4
Additional operational options	extraDry, intensiveZone,	extraDry, varioSpeed Plus	Shine&Dry, Hygiene Plus,	Shine&Dry,	Hygiene Plus,
	varioSpeed Plus		intensiveZone, Wi-Fi,	intensiveZone,	intensiveZone,
			varioSpeed Plus	varioSpeed Plus	varioSpeed Plus
Home Connect	-	-	•	-	-
Machine care	-		-		
FLEXIBLE DESIGN ELEMENTS				. 51 2	
Basket type	varioFlex	varioFlex	varioFlex Pro	varioFlex Pro	varioFlex
ania Draway		d. D			
varioDrawer	varioDrawer	varioDrawer	varioDrawer Pro	varioDrawer Pro	varioDrawer
Adjustable upper basket	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stage	rackMatic™ 3 stag
Largest loadable dish upper basket (cm)	21	27	21	21	21
Largest loadable dish lower basket (cm)	31	31	31	31	31
Largest loadable distriower basket (CIII)					
Number of flip tines in upper / lower rack	2/4	2/4	6/8	3 / 4	212
-	Bottom basket,	Bottom basket,	Bottom basket,	Bottom basket,	Bottom basket,
Number of flip tines in upper / lower rack Basket with handle					
Number of flip tines in upper / lower rack Basket with handle INNOVATION AND TECHNOLOGY	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket
Number of flip tines in upper / lower rack Basket with handle INNOVATION AND TECHNOLOGY Real-time clock	Bottom basket,	Bottom basket, top basket –	Bottom basket,	Bottom basket, top basket –	Bottom basket, top basket –
Number of flip tines in upper / lower rack Basket with handle INNOVATION AND TECHNOLOGY Real-time clock Door openAssist	Bottom basket, top basket – –	Bottom basket, top basket – –	Bottom basket, top basket	Bottom basket, top basket – –	Bottom basket, top basket – ■
Number of flip tines in upper / lower rack Basket with handle INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor	Bottom basket, top basket	Bottom basket, top basket –	Bottom basket, top basket	Bottom basket, top basket  timeLight	Bottom basket, top basket –
Number of flip tines in upper / lower rack Basket with handle INNOVATION AND TECHNOLOGY Real-time clock	Bottom basket, top basket – –	Bottom basket, top basket  infoLight (blue)	Bottom basket, top basket	Bottom basket, top basket  timeLight	Bottom basket, top basket  -  infoLight -
Number of flip tines in upper / lower rack Basket with handle INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor	Bottom basket, top basket – –	Bottom basket, top basket – –	Bottom basket, top basket	Bottom basket, top basket  timeLight  Zeolith®	Bottom basket, top basket – ■
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith® Drying system	Bottom basket, top basket  infoLight (blue)	Bottom basket, top basket  infoLight (blue)	Bottom basket, top basket	Bottom basket, top basket  timeLight	Bottom basket, top basket  infoLight hydroDry
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zecolith® Drying system Flood protection system	Bottom basket, top basket  infoLight (blue) hydroDry	Bottom basket, top basket  infoLight (blue) hydroDry	Bottom basket, top basket  Zeolith®	Bottom basket, top basket  timeLight  Zeolith®	Bottom basket, top basket  infoLight hydroDry
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist ndicator projection on floor Zeolith® Doyrying system Flood protection system Load sensor	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket  Zeolith® hydroSafe 24 hour	Bottom basket, top basket  timeLight  Zeolith® hydroSafe 24 hour	Bottom basket, top basket  - infoLight - hydroDry hydroSafe 24 hou
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor InydroSensor technology	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket  Zeolith® hydroSafe 24 hour	Bottom basket, top basket  timeLight  Zeolith® hydroSafe 24 hour	Bottom basket, top basket
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith® Drying system Clood protection system Load sensor Injerior of the production of the protection of the pro	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket  Zeolith® hydroSafe 24 hour	Bottom basket, top basket  timeLight  Zeolith® hydroSafe 24 hour	Bottom basket, top basket
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist ndicator projection on floor Zecolith®  Drying system Flood protection system Load sensor Load sensor Load sensor technology DESIGN FEATURES Interior light	Bottom basket, top basket  infoLight (blue)  hydroDry hydroSafe 24 hour	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket  Zeolith® hydroSafe 24 hour  Blue	Bottom basket, top basket  timeLight  Zeolith® hydroSafe 24 hour	Bottom basket, top basket
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor hydroSensor technology DESIGN FEATURES Interior light Full colour TFT display	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour	Bottom basket, top basket  Zeolith® hydroSafe 24 hour  Blue	Bottom basket, top basket  timeLight  Zeolith® hydroSafe 24 hour  Blue -	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist indicator projection on floor Zeolith® Drying system Flood protection system Load sensor hydroSensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h)	Bottom basket, top basket	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour	Bottom basket, top basket	Bottom basket, top basket  timeLight  Zeolith® hydroSafe 24 hour	Bottom basket, top basket  -  infoLight  - hydroDry hydroSafe 24 hou
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith® Drying system Clood protection system Load sensor InydroSensor technology DESIGN FEATURES Interior light Efull colour TFT display Start delay time max (h) Child safety	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour 24	Bottom basket, top basket	Bottom basket, top basket  Zeolith® hydroSafe 24 hour  Blue	Bottom basket, top basket	Bottom basket, top basket  - infoLight - hydroDry hydroSafe 24 hou
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zecolith®  Drying system Flood protection system Load sensor Inoydro Sensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  Zeolith® hydroSafe 24 hour  Blue 24	Bottom basket, top basket	Bottom basket, top basket  - infoLight - hydroDry hydroSafe 24 hou
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor hydroSensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator	Bottom basket, top basket  infoLight (blue) - hydroDry hydroSafe 24 hour 24 - Acoustic	Bottom basket, top basket	Bottom basket, top basket  Zeolith® hydroSafe 24 hour  Blue 24 Acoustic	Bottom basket, top basket	Bottom basket, top basket top basket top basket top basket top basket top basket top basket, top baske
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Peolith® Drying system Plood protection system Load sensor PrydroSensor technology DESIGN FEATURES Interior light Uill colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Acoustic	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou 24 - Acoustic
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Realitime clock Dorying system Realitime clock Drying system Realitime clock Drying system Realitime clock Realitime clo	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou 24 - Acoustic - Stainless steel
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor InydroSensor technology Design FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Acoustic	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou 24 - Acoustic
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith® Drying system Flood protection system Load sensor hydroSensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system IECHNICAL SPECIFICATIONS	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Acoustic Stainless steel	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou -  24 - Stainless steel
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Peolith® Drying system Plood protection system Load sensor Portion system Load sensor Policy open system Load sensor Policy open system Load sensor Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator Interior cavity Selef-cleaning filter system  EECHNICAL SPECIFICATIONS Length of electrical supply cord (cm)	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou -  - 24 - Stainless steel - 175
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith® Drying system Clood protection system Load sensor Plood protection system Load sensor Load sensor technology DESIGN FEATURES Interior light Feull colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system IECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm)	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  - infoLight - hydroDry hydroSafe 24 hou 24 - Stainless steel - Stainless steel
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor hydroSensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system ITECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of inlet hose (cm) Length of outlet hose (cm) Length of outlet hose (cm)	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Plood protection system Load sensor InydroSensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system  EECHNICAL SPECIFICATIONS Length of inlet hose (cm) Length of outlet hose (cm) Net weight (kg)	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Stainless steel 175 165 190 38.0	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 - Stainless steel - 175 165 205 29.3
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Peolith® Drying system Plood protection system Load sensor Point Sensor Point Sensor Point Sensor Point Sensor Point Sensor Point Sensor  It is in the sensor Point Senso	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Stainless steel Stainless steel 175 165 190 38.0 41.0	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 - Stainless steel - 175 165 205 29.3 32.5
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist indicator projection on floor Zeolith®  Drying system  Flood protection system Load sensor hydroSensor technology  DESIGN FEATURES  Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator / Rinse aid light indicator interior cavity Self-cleaning filter system  FECHNICAL SPECIFICATIONS Length of inlet hose (cm) Length of inlet hose (cm) Length of outlet hose (cm) Length of outlet hose (cm) Length of outlet hose (cm) Meximum accepted water hardness (°DH)	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket top bas
Number of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Realitime clock Porying system Realitime clock Porying system Realitime clock Realitime	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Stainless steel Stainless steel 175 165 190 38.0 41.0	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 - Stainless steel - 175 165 205 29.3 32.5
Aumber of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY  Real-time clock Door openAssist Indicator projection on floor  Reolith®  Drying system  Projection on floor  Reolith®  Projection on floor  Reolith®  Projection on floor  Reolith®  Projection on floor  Reolith®  Reoli	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 - 3 Stainless steel - 175 165 205 29.3 32.5 50
Aumber of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Realitime clock Dorry openAssist Indicator projection on floor Realitime Rea	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 - 3 Stainless steel - 175 165 205 29.3 32.5 50
Aumber of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Realitime clock Dorying system Realitime clock Drying system Realitime clock Drying system Realitime clock Realitime clo	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  Top basket  Zeolith® hydroSafe 24 hour  Blue  24  Acoustic  Tr5 165 190 47.0 49.0 50 60	Bottom basket, top basket	Bottom basket, top basket top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 - Stainless steel - 175 165 205 29.3 32.5 50 60
Number of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist indicator projection on floor Ceolith® Drying system -lood protection system -lood sensor technology	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket top basket top basket
Number of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Realitime clock Porying system Realitime clock Porying system Realitime clock Realitime	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Stainless steel 175 165 190 38.0 41.0 50 60 875 598	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou  - 24 - Stainless steel - 175 165 205 29.3 32.5 50 60 875 448 450
Number of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Ceolith® Drying system Clood protection system Clood Fratures Interior light Cull colour TFT display Start delay time max (h) Child safety Cloigital countdown indicator Cloid of cycle indicator Cloid for colour cavity Celf-cleaning filter system  Self-cleaning filter system  SECHNICAL SPECIFICATIONS Length of electrical supply cord (cm) Length of outlet hose (cm) Length of outlet hose (cm) Length of outlet hose (cm) Wet weight (kg)  Gross weight (kg) Maximum accepted water hardness (°DH) Maximum height for installation (mm) Maximum width for installation (mm) Maximum width for installation (mm) Depth for installation (mm)	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Stainless steel 175 165 190 38.0 41.0 50 60 875 598 600 550	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hou  -  24 -  Acoustic - Stainless steel - 25 29.3 32.5 50 60 875 448 450 550
Number of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Joor openAssist Indicator projection on floor Projection on floor Real-time clock Joor openAssist Indicator projection on floor Real-time clock Real-time clock Real-time clock Real-time clock Real-time floor Real-t	Bottom basket, top basket  infoLight (blue) hydroDry hydroSafe 24 hour 24 Stainless steel 175 165 190 38.0 41.0 50 60 875 598	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket top bas
Number of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Realitime clock Realitime cl	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket  -  infoLight - hydroDry hydroSafe 24 hour  - 24 -  Acoustic - 175 165 205 29.3 32.5 50 60 875 448 450 550 60
Number of flip tines in upper / lower rack Basket with handle  NNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor InydroSensor technology DESIGN FEATURES Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator End of cycle indicator Salt light indicator / Rinse aid light indicator Interior cavity Self-cleaning filter system FECHNICAL SPECIFICATIONS Length of inlet hose (cm) Length of inlet hose (cm) Length of inlet hose (cm) Net weight (kg) Gross weight (kg) Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)³ NSTALLATION Maximum height for installation (mm) Maximum width for installation (mm) Maximum width for installation (mm) Maximum width for installation (mm) Maximum divisability feet (mm) ACCESSORIES	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket
Number of flip tines in upper / lower rack Basket with handle  INNOVATION AND TECHNOLOGY Real-time clock Door openAssist Indicator projection on floor Zeolith®  Drying system Flood protection system Load sensor hydroSensor technology DESIGN FEATURES Interior light Full colour TFT display	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket
Aumber of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY  Real-time clock Door openAssist Indicator projection on floor  Reolith®  Drying system  Plood protection system Oad sensor Indrosensor technology  DESIGN FEATURES  Interior light Full colour TFT display Start delay time max (h) Child safety Digital countdown indicator Find of cycle indicator Find of cycle indicator Find of cycle indicator Find of cycle indicator Find of or site in the fine fine fine fine fine fine  FECHNICAL SPECIFICATIONS  Length of electrical supply cord (cm)  Length of inlet hose (cm)  Length of outlet hose (cm)  Length of outlet hose (cm)  Length of outlet hose (cm)  Length of under hose (cm)  Length of un	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket top bas
Aumber of flip tines in upper / lower rack lasket with handle  NNOVATION AND TECHNOLOGY  teal-time clock  oboor openAssist indicator projection on floor  feolith®  Drying system  lood protection system  oad sensor hydroSensor technology  DESIGN FEATURES  Interior light full colour TFT display ttart delay time max (h) child safety  loigital countdown indicator and of cycle indicator alt light indicator / Rinse aid light indicator neterior capt  ielf-cleaning filter system  FECHNICAL SPECIFICATIONS  ength of electrical supply cord (cm) ength of inlet hose (cm) ength of outlet hose (cm) elet weight (kg) daximum accepted water hardness (°DH)  Aaximum temperature for water intake (°C)³  NSTALLATION  Asaximum width for installation (mm)  Vidth of the product (mm)  Aaximum width for installation (mm)  Depth for installation (mm)  Aaximum adjustability feet (mm)  Accessories  Included accessories	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket	Bottom basket, top basket, top basket

<sup>\*\*</sup>Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.

\*The consumption per cleaning cycle using cold water fill, including consumption of the standby mode.

\*The consumption per cleaning cycle of the "Eco 50" programme using cold water fill.

\*We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmollitre (7.0"e) and the water softener in the appliance is turned off. Please contact product advice for further information.

Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to %" screwed joint.

<sup>\*\*</sup>Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.


The consumption per cleaning cycle of the "Eco 50" programme using cold water fill.

\*\*We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmolifiter (7.0"e) and the water softener in the appliance is turned off. Please contact product advice for further information.


Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to %" screwed joint.

# Dishwasher technical diagrams


Fully integrated dishwashers SN678D06TG, SN678D01TG, SN658D00MG, SN658D01MG, SN658D02MG and SN636X00KG

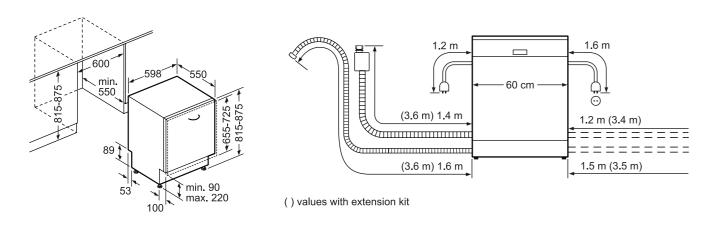


# Fully integrated dishwasher SX736X03ME

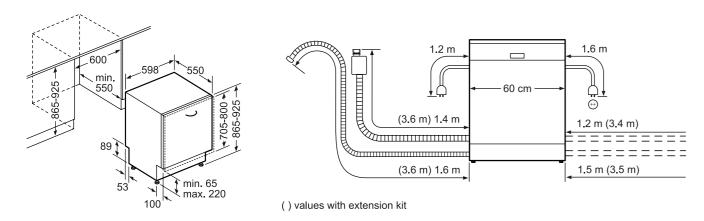


# Fully integrated dishwasher SN736X03ME

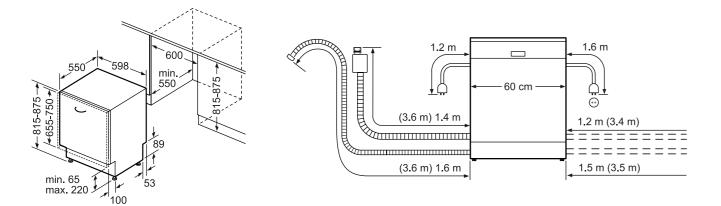

## Semi-integrated dishwasher SN578S36TE

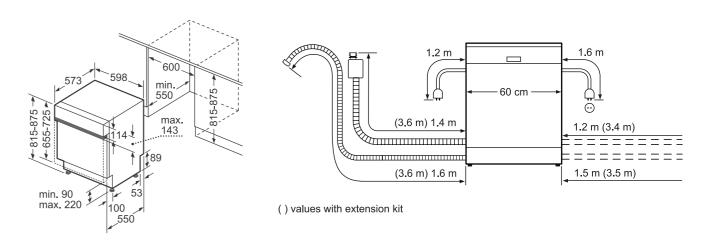

# 45cm fully integrated dishwashers SR656X01TE and SR636D00MG

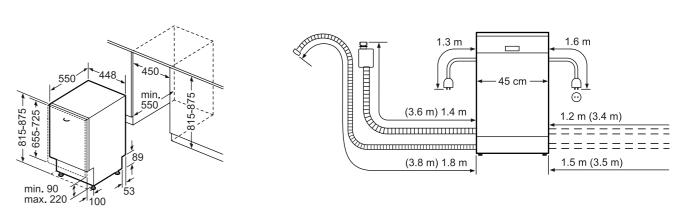

Home laundry | Specifications Technical diagrams | Home laundry


# Home laundry specifications

APPLIANCE TYPE		SHING MACHINES		ASHER DRYERS
Design family	iQ 700	iQ 500	iQ 500	iQ 300
Model number White	WI14W500GB	WI14W300GB	WK14D541GB	WK14D321GB
PERFORMANCE AND CONSUMPTION				
Energy efficiency class	A+++	A+++	В	В
Capacity cotton washing (kg)	8.0	8.0	7.0	7.0
	6.0	8.0		
Capacity cotton drying (kg)		-	4.0	4.0
Maximum spin speed (rpm)	1400	1400	1400	1400
Washing performance class	A	A	A	A
Energy consumption – wash and dry, full wash load (kWh)	_	_	5.5	5.5
Energy consumption – wash only (kWh)	_	_	1.27	1.27
Total annual energy consumption – washing and drying, 200 full loads¹ (kWh)		_	1100	1100
Total annual water consumption – washing only, 200 full loads (litres)		-	9000	9000
Water consumption – wash and dry, full wash load (litres)	137	157	105	99
Total annual water consumption – washing and drying, 200 full loads (litres)	9900	9900	21000	19800
Drum volume (litres)	53	53	52	52
Noise level washing <sup>2</sup> (dB [A] re 1pW)	41	41	57	57
Noise level spinning <sup>2</sup> (dB [A] re 1pW)	67		74	74
	6/	67		
Noise level drying (dB [A] re 1pW)	-	_	60	60
PROGRAMMES/FUNCTIONS				
Standard Programmes				
- Cottons	-	_		
- Easy-care programme	•		<del> </del>	
– Wool programme		-		
– Delicates / silk	■/■	■./ -		
– Intensive dry	-	-		
– Gentle dry	_	_		
- Rinse				_
			<u> </u>	
– Spin		•		•
- Empty				■
Specialist programmes				
- rapid15				_
- Night wash	_	_		_
- Shirts/blouses			<u> </u>	
- Outdoor		-		_
– Mixed fabrics				
– Fluff removal programme	-	_		
Options				
- Intensive	-	_		•
– Less ironing		-		•
– Extra rinse				
– Prewash	-	_	•	■
– Variable temperature	•	_		
- Variable spin		_	-	•
		_		
– Spin speed reduction		-		<b>I</b>
– flexiTime	-	_		
KEY FEATURES				
Full electronic control dial for all wash and special programmes	-	-		
Time selection options	_	_		
ADDITIONAL FEATURES				
				_
Aquatronic wash system		-		•
Time delay (h)	24	24	24	19
autoLoad	-	_		
Foam detection system				
Out of balance load adjustment	<u>=</u>	_		-
	<u>=</u>			
Child lock				- I
Water protection system	Aquastop	Aquastop	hydroSafe	hydroSecure
TECHNICAL INFORMATION				
Dimensions of the product: H x W x D exc door (cm)	81.8 x 59.6 x 57.4	81.8 x 59.6 x 57.4	82 x 59.5 x 58.4	82 x 59.5 x 58.4
Length of electrical supply cord (cm)	225	225	220	220
	LED	LED	LED	LED
Display				
Cabinet colour	White	White	White	White
Door colour Colour	White	White	White	White
Door opening (°)	130	130	95	95
Door binge	Left-hand	Left-hand	Left-hand	Left-hand
				Lett-nand
Fully integrable				
OPTIONAL ACCESSORIES				
Connecting piece (between appliance and 90cm worktop)	-	-	WZ20470	WZ20470
loor securing kit	_	_	WX975600	WX975600
-loor securing kit	-			

Yes, model has this feature.


# Home laundry technical diagrams

Integrated washing machines WI14W500G and WI14W300GB

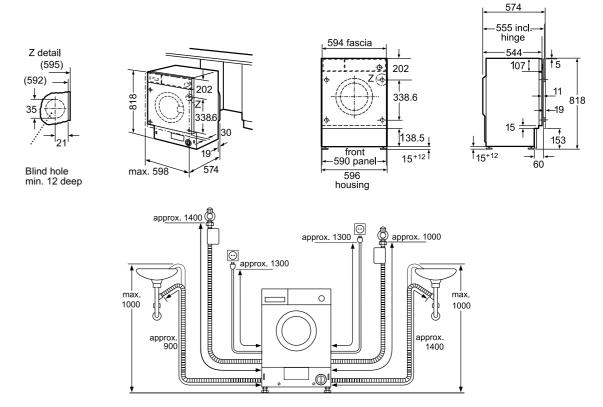

If, after fitting, the HydroSafe inlet hose to the installation is not long enough, it can be lengthened with the connecting kit WZ 10130 (length 2.5 m).

# Integrated washer dryers WK14D541GB and WK14D321GB

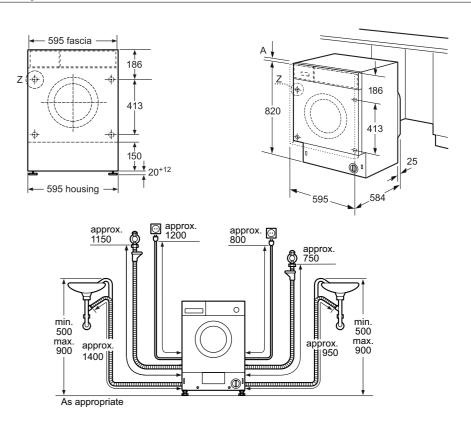

<sup>-</sup> Feature not available for this model

 $<sup>^1</sup>$  Consumption per year based on 200 wash dry cycles for cottons at 60°C.  $^2$  Noise is measured during the washing and spinning phases at standard 60°C cottons at full load

Notes		
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	
	_	-
	_	

Notes	

Siemens, a division of BSH Home Appliances Ltd, Grand Union House, Old Wolverton Road, Wolverton, Milton Keynes, MK12 5PT Tel: 0344 892 9040

siemens-home.bsh-group.com/uk

BSH Home Appliances Ltd, M50 Business Park, Ballymount, Dublin 12 Tel: 1890 626041

siemens-home.bsh-group.com/ie

BSH Group is a Trademark Licensee of Siemens AG

#### Disclaimer

This brochure is current as from the publication date and supersedes all previous brochures for these products. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved. No part of this publication may be reproduced in any form or without the prior written permission of BSH Home Appliances Ltd.

This brochure should not be regarded as an infallible guide nor as an offer of sale for a particular product.

Due to variables in the reproduction process, colours of actual products may vary slightly from those depicted. We recommend a visit to a Siemens dealer to confirm that specifications and colours are to your satisfaction.

Valid from April 2018

